


SMD Power Inductor CDRH50D18R/LD

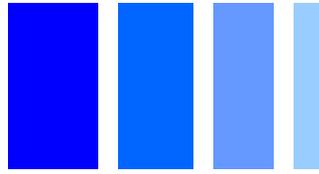

Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 5.2 × 5.2 × 2.0mm Max.
- Product weight: 0.16g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -40°C~+125°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+125°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging.
- 13.0" diameter reel
- 3000pcs per reel


Applications

- Ideally used in digital single-lens reflex camera etc.

Dimension - [mm]

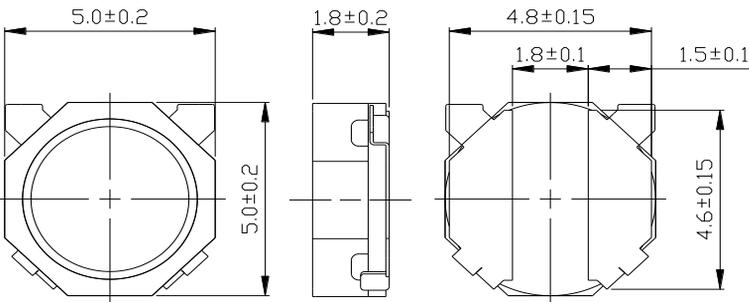

Land pattern and Schematics - [mm]

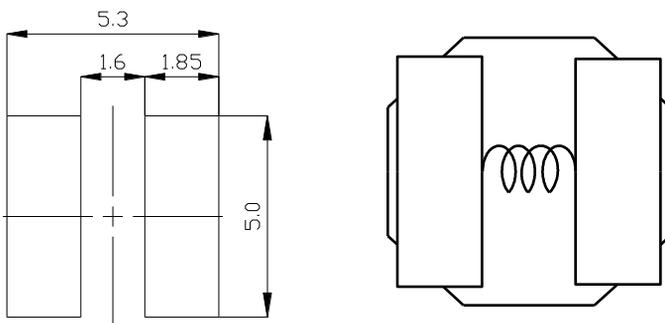

SMD Power Inductor

CDRH50D18R/LD



Electrical Characteristics


Part No.	Stamp	Inductance (μH) [Within] ※1	D.C.R. ($\text{m}\Omega$) [Within] (at 20°C)	Saturation current (A) ※2		Temperature rise current (A) ※3
				(at 20°C)	(at 105°C)	
CDRH50D18RLDNP-1R1NC	A	$1.1 \pm 30\%$	$17 \pm 25\%$	2.10	1.72	4.40
CDRH50D18RLDNP-1R6NC	B	$1.6 \pm 30\%$	$20 \pm 25\%$	1.75	1.46	3.95
CDRH50D18RLDNP-2R2NC	C	$2.2 \pm 30\%$	$24 \pm 25\%$	1.50	1.24	3.45
CDRH50D18RLDNP-3R6NC	D	$3.6 \pm 30\%$	$31 \pm 25\%$	1.17	0.98	3.15
CDRH50D18RLDNP-4R7MC	E	$4.7 \pm 20\%$	$34 \pm 25\%$	1.00	0.83	2.98
CDRH50D18RLDNP-6R8MC	F	$6.8 \pm 20\%$	$52 \pm 25\%$	0.85	0.70	2.22
CDRH50D18RLDNP-100MC	G	$10 \pm 20\%$	$79 \pm 25\%$	0.72	0.58	1.80
CDRH50D18RLDNP-150MC	H	$15 \pm 20\%$	$120 \pm 20\%$	0.58	0.47	1.40
CDRH50D18RLDNP-220MC	J	$22 \pm 20\%$	$178 \pm 20\%$	0.48	0.40	1.17
CDRH50D18RLDNP-330MC	K	$33 \pm 20\%$	$255 \pm 20\%$	0.38	0.30	0.97
CDRH50D18RLDNP-470MC	L	$47 \pm 20\%$	$355 \pm 20\%$	0.32	0.26	0.77
CDRH50D18RLDNP-680MC	M	$68 \pm 20\%$	$600 \pm 20\%$	0.28	0.23	0.54
CDRH50D18RLDNP-101MC	N	$100 \pm 20\%$	$760 \pm 20\%$	0.22	0.20	0.50
CDRH50D18RLDNP-151MC	P	$150 \pm 20\%$	$1420 \pm 20\%$	0.18	0.15	0.34

※1. Measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 70% of it's nominal value.


※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t = 40^\circ\text{C}$ ($T_a = 20^\circ\text{C}$).

SMD Power Inductor CDRH50D18R/LD

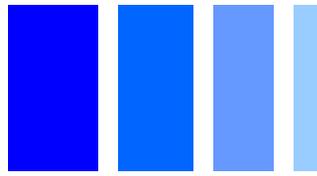


Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT


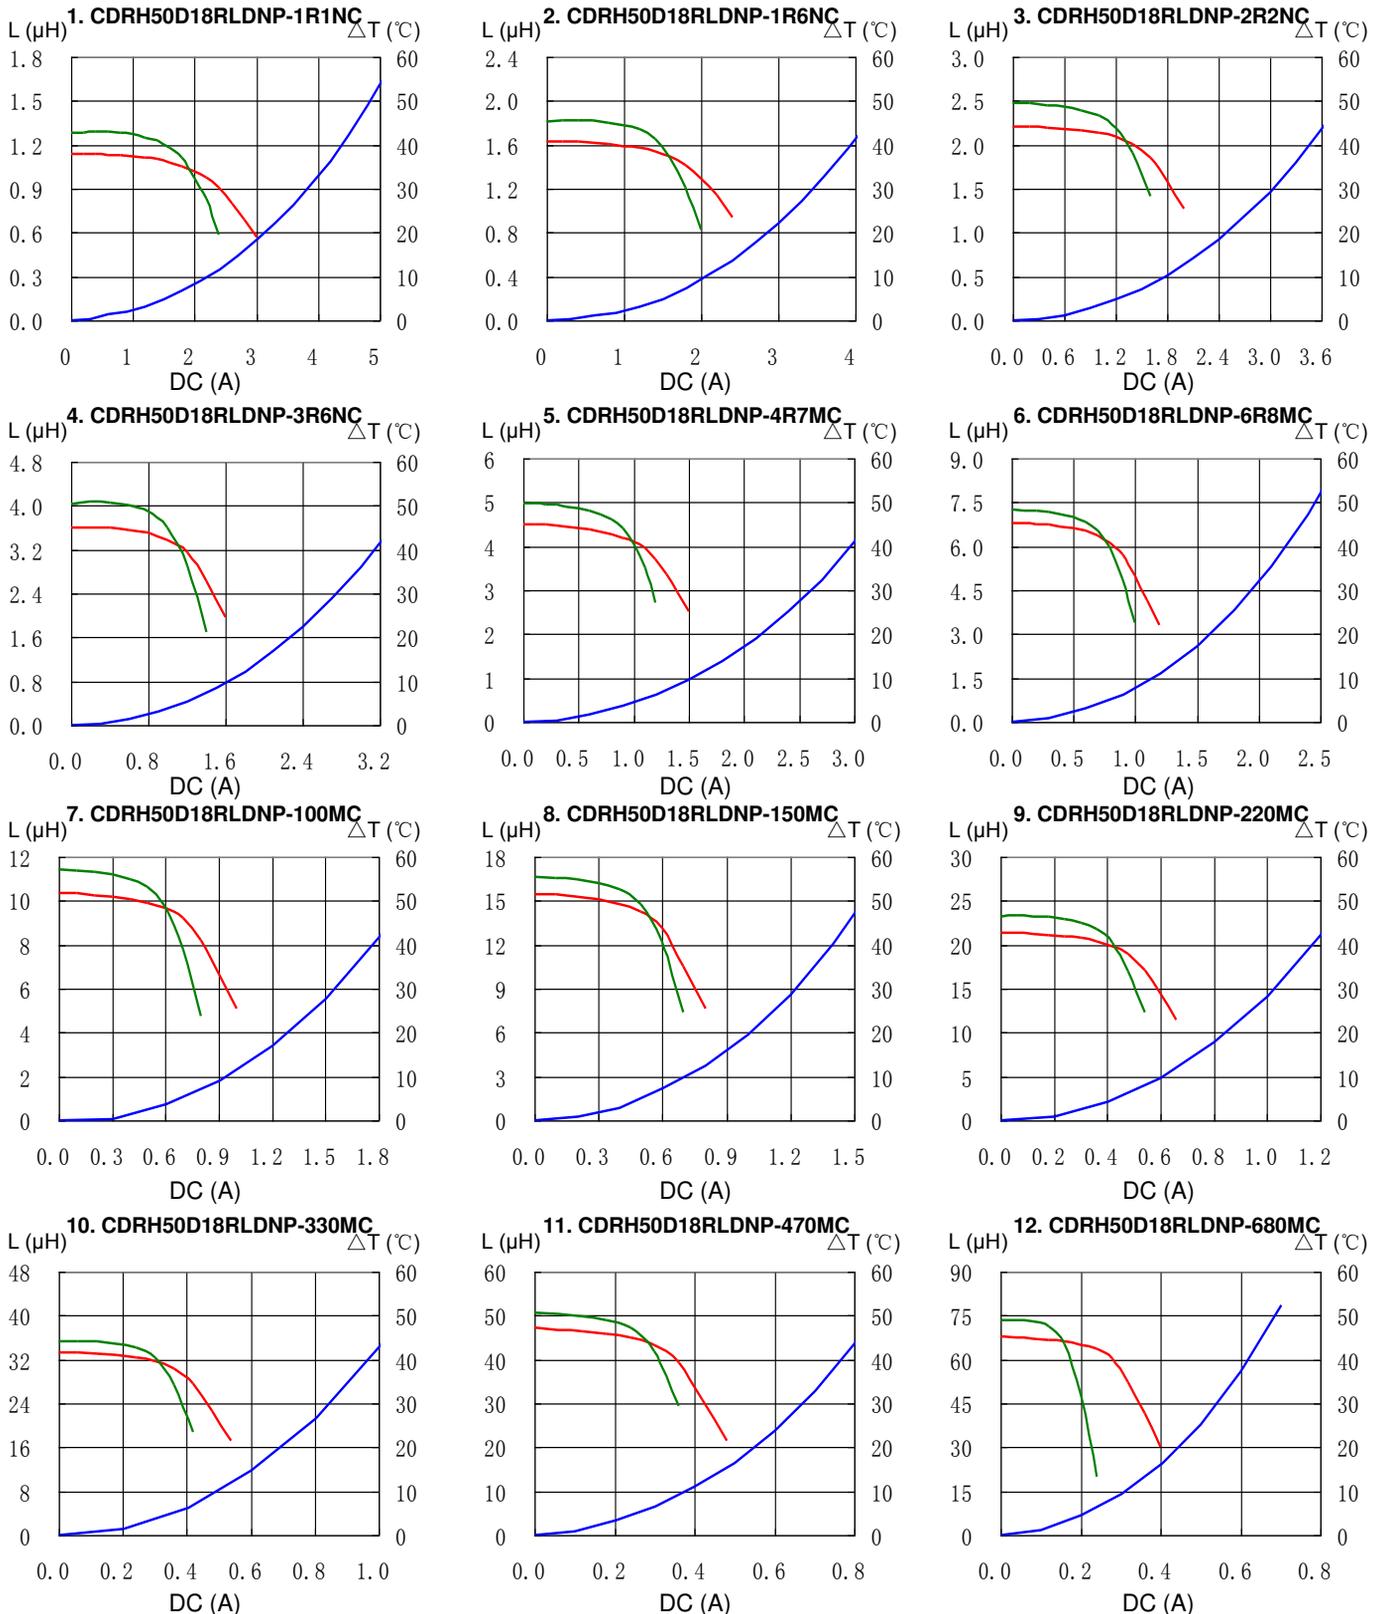


SMD Power Inductor CDRH50D18R/LD

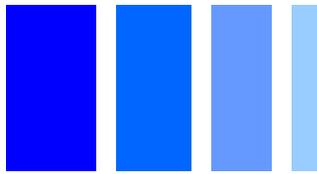


Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

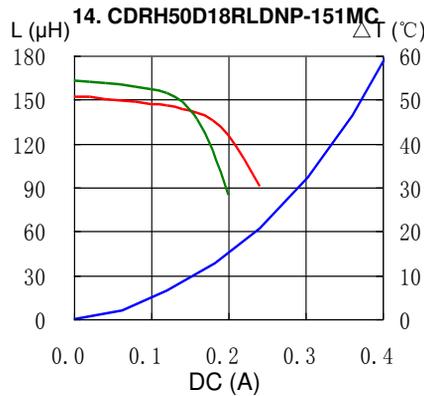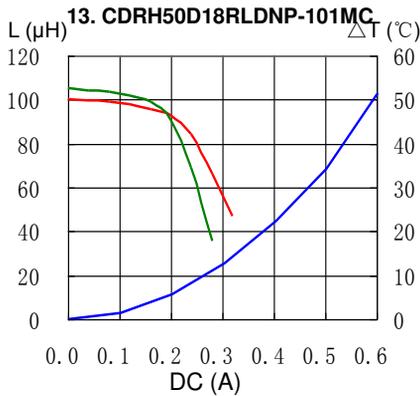


Solder Reflow Condition

Heat Endurance

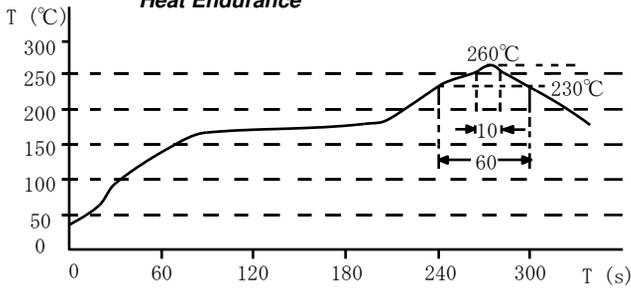

Temperature Chart

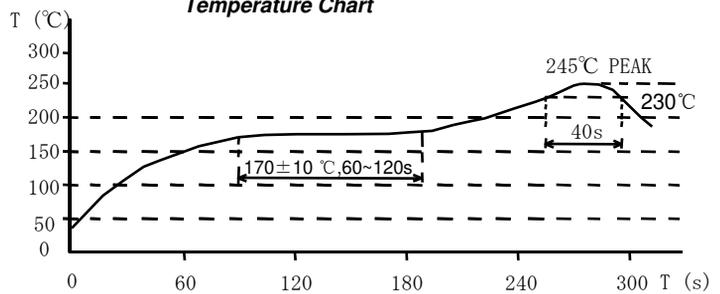

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel. +852-2880-6781
FAX. +852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel. +81-48-691-7300
FAX. +81-48-691-7340
sales@jp.sumida.com

Chicago

Tel. +1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel. +86-21-5836-3299
FAX. +86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel. +82-2-6237-0777
FAX. +82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel. +49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel. +86-755-8291-0228
FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel. +65-6296-3388
FAX. +65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel. +49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel. +886-2-8751-2737
FAX. +886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel. +1-408-321-9660
FAX. +1-408-321-9308
sales@us.sumida.com