



**Wiha Insulated T-handles**

**Insulation Test Standards:**

Insulation according to EN/IEC 60900, ASTM F-1505-01, New VDE 0682/part 201, DIN 7437, NFPA70E

Responds to OSHA's use specification 29 CFR1910


Each tool individually tested to 10,000 volts and certified to 1000 Volt ac or 1500 Volt dc



**Insulation**  
molded directly onto blade for permanent bonding

**Blade**  
CVM tool steel, hardened to average 58/60RC

**1000V**

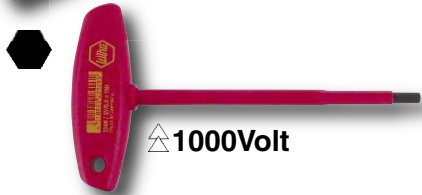


**1000Volt**

[SHOP](#)

**334** Inch T-handle, With Wiha-Molded Handle Insulation According to ASTM F-1505-01, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E, up to 1000 Volt. Individually Tested.

Blade CVM steel, hardened. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component.

Item							
No.	Inch	Inch	Inch	mm	lbs.	pkg.	
334 81	5/32	5.9	6.9	176	.09	10	
334 82	3/16	5.9	6.9	176	.15	10	
334 83	7/32	5.9	6.9	176	.19	10	
334 85	1/4	6.9	6.9	176	.20	10	
334 86	5/16	6.9	6.9	176	.26	10	
334 87	3/8	6.9	6.9	176	.44	10	

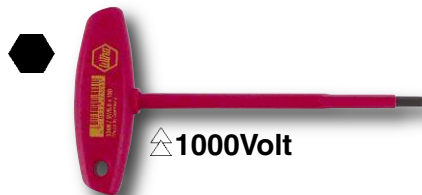

**1000Volt**

[SHOP](#)

**334** Metric T-handle, With Wiha-Molded Handle Insulation According to ASTM F-1505-01, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E, up to 1000 Volt. Individually Tested.

Blade CVM steel, hardened. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component.

Item							
No.	mm	mm	Inch	mm	Inch	lbs.	pkg.
334 41	4.0	150	5.9	176	6.9	.09	10
334 43	5.0	150	5.9	176	6.9	.15	10
334 45	6.0	150	5.9	176	6.9	.18	10
334 47	8.0	150	5.9	176	6.9	.26	10



**1000Volt**

[SHOP](#)

**334 90** Set 6 Pcs. Inch T-handle Hex

Item							
No.	Inch	Inch		Inch	Inch	lbs.	
334 90	334 81	5/32	6.9	334 85	1/4	6.9	1.70
	334 82	3/16	6.9	334 86	5/16	6.9	
	334 83	7/32	6.9	334 87	3/8	6.9	



**1000Volt**

[SHOP](#)

**334 91** Set 4 Pcs. Metric T-handle Hex

Item							
No.	mm	mm		mm	mm	.99 lbs.	
334 91	334 41	4.0	150	334 45	6.0	150	
	334 43	5.0	150	334 47	8.0	150	