


DESCRIPTION: CABLE POF 1MM, SIMPLEX 2.2MM, PVC, GRAY, 500M REEL

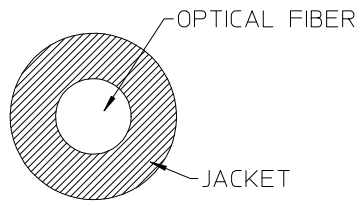


CORE MATERIAL	POLYMETHYL METHACRYLATE (PMMA)
CLADDING MATERIAL	FLUORINATED POLYMER
NUMERICAL APERTURE	0.5
CORE REFRACTIVE INDEX	1.49
REFRACTIVE INDEX PROFILE	STEP INDEX
CORE DIAMETER	980±60 μm
CLADDING DIAMETER	1000±60 μm
JACKET MATERIAL	POLYVINYL CHLORIDE (PVC)
JACKET COLOR	GRAY
JACKET DIAMETER	2.2±0.07 mm
APPROXIMATE WEIGHT	5.3 kg/km
TRANSMISSION LOSS @650nm UNDER 25°C 50% RH UNDER OPERATION TEMPERATURE	max. 170 dB/km max. 190 dB/km
MIN BEND RADIUS	25mm
MAX TENSILE STRENGTH	min. 70 N
IMPACT ENDURANCE	min. 0.4 Nm
TWISTING ENDURANCE	min. 5 times
REPEATED BENDING ENDURANCE	min. 5000 times
STORAGE TEMPERATURE	-55°C to +85°C
OPERATION TEMPERATURE	-55°C to +85°C
OPERATION TEMPERATURE UNDER 95% RH	max. +75°C
FIRE RATING	UL1581 VW1, STYLE NO. 5237

NOTE:
1. PACKAGING: 500M REEL.

ENTER DESCRIPTION EC NO: MF2015-0572 DRWN: SBOJANIC 2015/03/25 CHKD: APPR: IGUMIN 2015/04/02 REV A	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	▽=0 ∇=0	mm INCH	MM ONLY	---	METRIC		
		4 PLACES ± --- ± ---	DRAWN BY DATE	TITLE			
		3 PLACES ± --- ± ---	SBOJANIC 2015/03/25	POF SIMPLEX CABLE, 2.2MM, PVC, GRAY, 500M			
		2 PLACES ± --- ± ---	CHECKED BY DATE	molex DOCUMENT NO. SD-106208-8705 SHEET NO. 1 OF 1			
	1 PLACE ± --- ± ---	APPROVED BY DATE					
	0 PLACE ± --- ± ---	IGUMIN 2015/04/02					
	ANGULAR ±1/2°	MATERIAL NO.	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SIZE					
		A3					

DESCRIPTION: CABLE POF 1MM, SIMPLEX 2.2MM, PVC, GRAY, 500M REEL

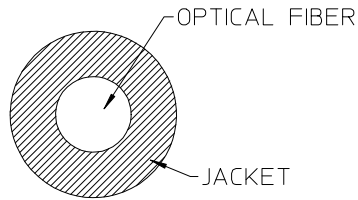

CORE MATERIAL	POLYMETHYL METHACRYLATE (PMMA)
CLADDING MATERIAL	FLUORINATED POLYMER
NUMERICAL APERTURE	0.5
CORE REFRACTIVE INDEX	1.49
REFRACTIVE INDEX PROFILE	STEP INDEX
CORE DIAMETER	980±60 μm
CLADDING DIAMETER	1000±60 μm
JACKET MATERIAL	POLYVINYL CHLORIDE (PVC)
JACKET COLOR	GRAY
JACKET DIAMETER	2.2±0.07 mm
APPROXIMATE WEIGHT	5.3 kg/km
TRANSMISSION LOSS @650nm UNDER 25°C 50% RH UNDER OPERATION TEMPERATURE	max. 170 dB/km max. 190 dB/km
MIN BEND RADIUS	25mm
MAX TENSILE STRENGTH	min. 70 N
IMPACT ENDURANCE	min. 0.4 Nm
TWISTING ENDURANCE	min. 5 times
REPEATED BENDING ENDURANCE	min. 5000 times
STORAGE TEMPERATURE	-55°C to +85°C
OPERATION TEMPERATURE	-55°C to +85°C
OPERATION TEMPERATURE UNDER 95% RH	max. +75°C
FIRE RATING	UL1581 VW1, STYLE NO. 5237

NOTE:
1. PACKAGING: 500M REEL.

ENTER DESCRIPTION EC NO: MF2015-0572 DRWN: SBOJANIC 2015/03/25 CHKD: APPR: IGUMIN 2015/04/02	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
		▽=0	mm INCH	MM ONLY	---	METRIC		
		∇=0	4 PLACES ± --- ± ---	DRAWN BY DATE	TITLE	POF SIMPLEX CABLE, 2.2MM, PVC, GRAY, 500M		
			3 PLACES ± --- ± ---	SBOJANIC 2015/03/25	CHECKED BY DATE			
			2 PLACES ± --- ± ---	APPROVED BY DATE				
	1 PLACE ± --- ± ---	IGUMIN 2015/04/02						
	0 PLACE ± --- ± ---	MATERIAL NO.	DOCUMENT NO.	SHEET NO.				
		ANGULAR ±1/2°	1062088705	SD-106208-8705	1 OF 1			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				