
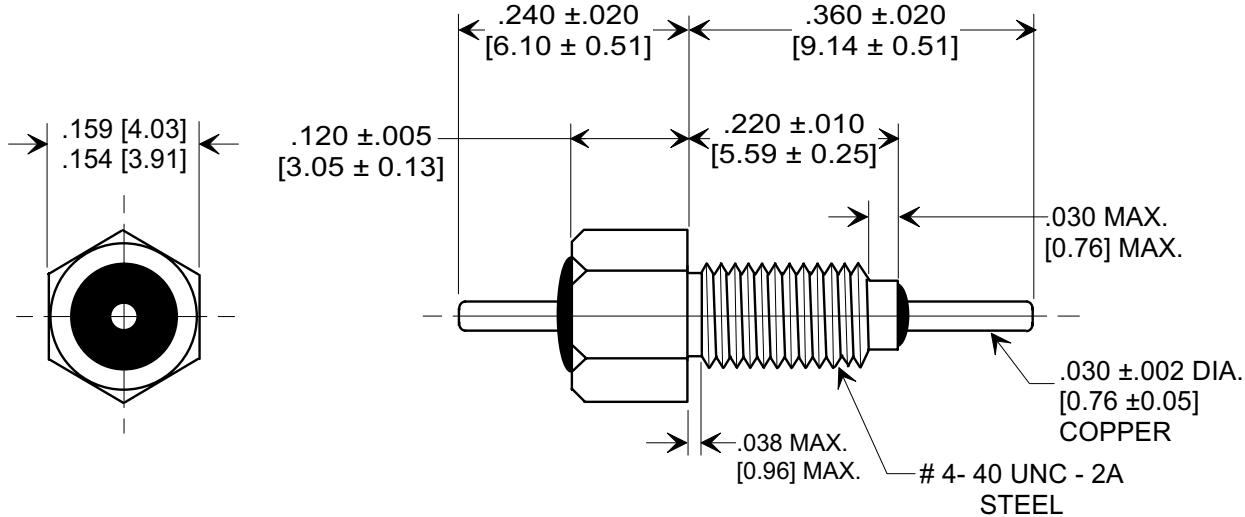



MARKETING SALES DRAWING

Electrical Testing
per Tucsonix standard
test plans and Mil-Std-202
Test Methods.

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

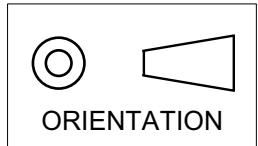

MOUNTING HARDWARE

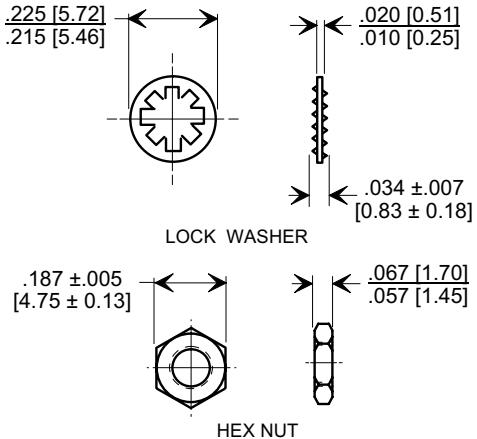

NOTES:

1. TUSONIX STANDARD PART NUMBER: 4400-032.
TUSONIX RoHS COMPLIANT PART NUMBER: 4400-032 LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
2. LEAD, BUSHING, AND MOUNTING HARDWARE: SILVER PLATED.
3. PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS. STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
4. OPERATING TEMPERATURE RANGE : -55°C TO +125°C.
5. MAX. RECOMMENDED SOLDERING TEMPERATURE: 260°C.
6. SUPPLIED WITH HEX NUT AND INTERNAL TOOTH LOCK WASHER.
7. MAX. RECOMMENDED MOUNTING TORQUE - 2.0 lb.-in. [.226 Nm].

CAP.(pf)	TOLERANCE	DC WORKING VOLTAGE		I.R. MIN. @ 100 (VDC.)	DWV (VDC)	DC CURRENT (AMPS)	MIN. NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220				
		85°C	125°C				1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
1200	GMV	300	200	10 G Ω	500	10	----	5	20	35	45

REVISION RECORD											
Original Release C.O.	20011102-1-02	0									
VARS 035,036,037 & 1MHz COLUMN ADDED. L.E. 11-07-90											
5591	1										
RDN TO COMP FMT & ADDED METRIC. S.M. 11-08-01	20011102-1-02	2									
REVISED DWG. DRAWING MADE FOR EACH VAR. S.M. 11-19-02	20021113-1-03	3									
CORRECTED ELECT. BLOCK S.M. 02-27-03	20030226-1-01	4									
ADDED AND REVISED NOTES. S.M. 12-14-05	20051122-2-16	5									