

# Component Housings

**Weidmüller DK 4 and DKT 4 modular terminals** are suitable for the installation of electronic components with a maximum diameter or width of 4.5 mm. Four independent clamping yoke screw connections are available for this purpose. A snap-on contour frame expands the installation space in the DK 4 by 6 mm. Depending on type, these modular terminals are suitable for mounting on TS 32, TS 35 x 7.5 or TS 35 x 15 mounting rails according to European Standards EN 50035 and EN 50022.

**Weidmüller WDK 2.5 modular terminals** are suitable for the installation of electronic components with a maximum width of 4 mm. Up to four independent clamping yoke screw connections or four 6.3 x 0.8 tab connections are available for this purpose. These modular terminals are suitable for mounting on TS 35 x 7.5 or TS 35 x 15 mounting rails.

**Weidmüller EG 1 housings** have four screw connections and, as accessories, up to four 0.8 x 2.8 or 0.8 x 4.8 mm solder/tab connections on a width of 18 mm. The screw clamp busbar ends with a solder ring inside the housing. Two end plates seal the module. Depending on type, the modules are mounted on TS 32, TS 35 x 7.5 or TS 35 x 15 mounting rails.

**Weidmüller EG 2 housings** — The external shape of these housings corresponds to Type EG 1. Four screw connections or up to eight 0.8 x 6.3 mm / 0.8 x 2.8 mm tab connectors are connected with a printed circuit board in the housing. They can be mounted on TS 32, TS 35 x 7.5 or TS 35 x 15 mounting rails.

**Weidmüller EG 3 housings** provide six screw connections or twelve 0.8 x 6.3 mm / 0.8 x 2.8 mm tab connections on a width of 22.5 mm. As an accessory, Weidmüller offers a speed printed circuit board with a 2.54 mm hole pitch or fully copper-coated. The engageable combination foot allows the terminals to be mounted on TS 32, TS 35 x 7.5 or TS 35 x 15 mounting rails. The MPL mounting plate is used to mount the housing directly (without mounting rail). Due to the sliding foot construction, the EG 3 can be turned through 180° in all types of assembly (e.g. exchanging input and output).

**Weidmüller EG 4 housing**, like Type EG 3, offers a width of 22.5 mm. However, the greater installation depth (75 mm) and height (109 mm) allow the installation of more complex circuit configurations. The installed circuit can be connected via six screw connections.

The engageable combination foot allows the terminals to be mounted on TS 32, TS 35 x 7.5 or TS 35 x 15 mounting rails. Due to the sliding foot construction, the EG 4 can be slid 6 mm forwards or backwards on the engaging foot and can be turned through 180° (e.g. exchanging input and output).

**Weidmüller EG 5 housings** — The external dimensions of these housings correspond to Type EG 4. The EG 5 has twelve screw connections which can be wired with solder lugs inside the housing. The engageable combination foot allows the terminals to be mounted on TS 32, TS 35 x 7.5 or TS 35 x 15 mounting rails. Due to the sliding foot construction, the EG 4 can be slid 6 mm forwards or backwards on the engaging foot and can be turned through 180° (e.g. exchanging input and output).




**Weidmüller RS 70 individual parts for rail mounting** — The end sections can be engaged to form units up to 20 mm wide. Any desired intermediate spacers or feet can be connected between two side pieces (fixing feet) at intervals of 5 mm. In this way, a carrier module is constructed for a printed circuit board on which various components can be soldered. The module snaps onto TS 32, TS 35 x 7.5 or TS 35 x 15 mounting rails.

**Weidmüller rail-mounted profiles** — The RS 45, RS 80 and RS 100 profiles are available as 2 m long strips. The extruded profiles can be easily cut to any length with a saw. In this way, a carrier module is constructed for a printed circuit board on which various components can be soldered. The fixing feet can be slid into these profiles for mounting on TS 32, TS 35 x 7.5 or TS 35 x 15 mounting rails. The sliding foot construction of the RS 80 also allows the fixing foot to be turned through 180°.


**The Wavebox is characterized by:**

- Optimal width for any application (12.5 mm, 17.5 mm, 22.5 mm, 45 mm)
- Large component assembly
- UL94 Flammability class V2
- No tools required for assembly
- Plug-in printed circuit board
- Plug-in cross-connection via ZQV 2.5 N
- Hinged, transparent cover
- BLZ 5.08 screw/plug and socket connector
- BLZF 5.08 optional tension clamp/plug and socket connector
- Marking option with WS tags
- Suitable for snap-fitting on TS 35


## Modular Terminals

Dimensions		
Terminal width (+ 0.2 assembly tolerance)		
Insulation stripping length		
Connection Data		
Screw connection, solid strand		
Screw connection, flexible strand		
Conductor cross-section		
VDE rated Data		
Rated wire size		
Rated voltage		
Rated current		
Power loss		
Connection diagram		
Ordering Data		
Modular terminal used to widen component area	For TS 32 	<b>Type Part No.</b>
Contour frame used to widen component area (6 mm width)	For TS 32 	<b>Type Part No.</b>
	For TS 35 	<b>Type Part No.</b>
Accessories		
Mounting rail (2 m long)		
End bracket (thickness mm)		For TS 32 For TS 35
End plate (thickness mm)		
Small partition		
Socket for test plug		
Test plug (pin diameter)		
Jumpers (preassembled)		2-pole 3-pole 4-pole 10-pole
Switchable jumper bracket		
Connection sleeve		
Screw		
Cover plate (4 terminals)		
Screw (plastic)		
Jumper bridge		

**DK 4**



**DKT 4**



**WDK 2.5**



**WDK 2.5 F**



**WDK 2.5 FF**




6 mm	6 mm	5 mm	5 mm	5 mm	5 mm
9 mm	9 mm	10 mm	10 mm	10 mm	-
0.5...4 mm <sup>2</sup>	0.5...4 mm <sup>2</sup>	0.5...4 mm <sup>2</sup>	0.5...4 mm <sup>2</sup>	0.5...4 mm <sup>2</sup>	
0.5...4 mm <sup>2</sup>	0.5...4 mm <sup>2</sup>	0.5...2.5 mm <sup>2</sup>	0.5...2.5 mm <sup>2</sup>	0.5...2.5 mm <sup>2</sup>	
AWG #22...12	AWG #22...17	AWG #26...4	AWG #26...4	AWG #26...4	
4 mm <sup>2</sup>	4 mm <sup>2</sup>	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	1 mm <sup>2</sup>	
380 VAC	380 VAC	380 VAC	380 VAC	380 VAC	
10 A	10 A	26 A	12 A (2 x 6A)	12 A (2 x 6 A)	
0.5 W	0.5 W	0.5 W	0.5 W	0.5 W	
DK 4 PA <b>204988</b>	DK 4 PA <b>111546</b>	DKT 4 PA <b>68736</b>	DKT 4 PA <b>111566</b>		
DK 4/35 PA <b>202684</b>	DK 4/35 PA <b>111556</b>	DKT 4 /35PA <b>68746</b>	DKT 4/35 PA <b>111576</b>	WDK 2.5 <b>102320</b>	WDK 2.5 <b>102310</b>
DK 4 RA <b>69096</b>	DK 4 RA <b>69096</b>			WDK 2.5 F <b>102160</b>	WDK 2.5 FF <b>102170</b>
DK 4 RA/35 <b>69106</b>	DK 4 RA/35 <b>69106</b>				
<b>Type</b>	<b>Part No.</b>	<b>Type</b>	<b>Part No.</b>	<b>Type</b>	<b>Part No.</b>
TS 32	<b>12280</b>	TS 32	<b>12280</b>	TS 35 x 7.5	<b>38340</b>
TS 35 x 7.5	<b>38340</b>	TS 35 x 7.5	<b>38340</b>	Slotted	<b>51450</b>
TS 35 x 15	<b>49800</b>	TS 35 x 15	<b>49800</b>	TS 35 x 15	<b>49800</b>
EWK 1 (8.5)	<b>20616</b>	EWK 1 (8.5)	<b>20616</b>	TS 35 x 15	<b>49800</b>
EW 35 (8.5)	<b>38356</b>	EW 35 (8.5)	<b>38356</b>	TS 35 x 15	<b>49800</b>
AP PA (1.5)	<b>35926</b>	AP PA (1.5)	<b>68756</b>	WAP	<b>105910</b>
TSch 4	<b>36336</b>	TSch 4	<b>36336</b>	WAP	<b>105910</b>
StB 8.5	<b>21570</b>			WAP	<b>105910</b>
PS (ø 2.3)	<b>18040</b>				
Q 2	<b>33640</b>			WQV 2.5	<b>105366</b>
Q 3	<b>33650</b>			WQV 2.5	<b>105376</b>
Q 4	<b>33660</b>			WQV 2.5	<b>105386</b>
Q 10	<b>36860</b>			WQV 2.5	<b>105446</b>
VL 2	<b>44670</b>			WQV 2.5	<b>105446</b>
VH 10	<b>44660</b>				
BS M 2.5 x 14	<b>26680</b>				
AD 4	<b>30340</b>				
BSK M 2.5 x 18	<b>30330</b>				
QB 2*	<b>48270</b>	QB 2*	<b>48270</b>		
QB 3*	<b>48280</b>	QB 3*	<b>48280</b>		
QB 4*	<b>48290</b>	QB 4*	<b>48290</b>		
QB 75 bare*	<b>52640</b>	QB 75 blank*	<b>52640</b>		
Insulation prof.	<b>52670</b>	Insulation prof.	<b>52670</b>		

\*When using QB: conductor connection = max. 2.5 mm<sup>2</sup>

# W-Series

## WDK...N for electronic components

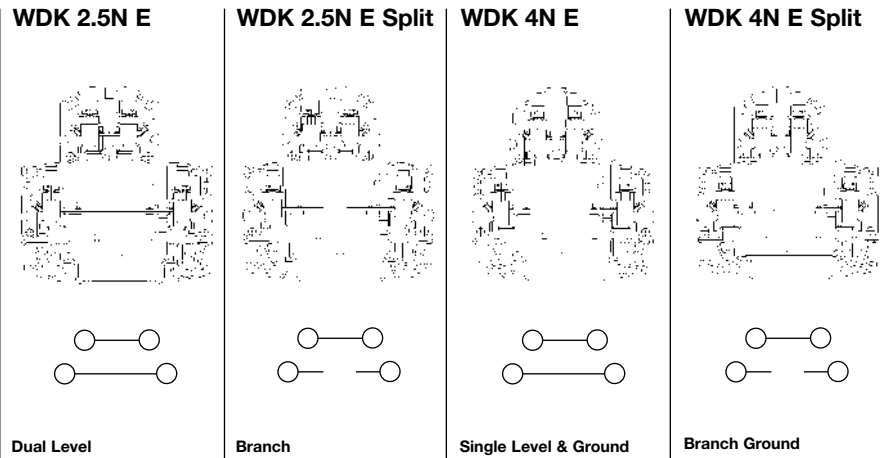

Available Options	Version	Part No.	Part No.	Part No.	Part No.
	Wemid	<b>1041630000</b>	<b>1041640000</b>	<b>1041930000</b>	<b>1041940000</b>
<b>Dimensions</b>					
Width/length/height mm (in.)	with TS 35 x 7.5	5/60/62 (0.20/2.36/2.44)	5/60/62 (0.20/2.36/2.44)	6/60/64 (0.24/2.36/2.52)	6/60/64 (0.24/2.36/2.52)
Insulation stripping length	mm (in.)	8 (.31)	8 (.31)	8 (.31)	8 (.31)
<b>Technical Data</b>					
Rated voltage / rated current / wire size (AWG)	UL	300 V / 10 A / #22...12	300 V / 10 A / #22...12	300 V / 10 A / 22...10	300 V / 10 A / 22...10
	CSA	300 V / 20 A / #26...12	300 V / 20 A / #26...12	300 V / 20 A / 26...10	300 V / 20 A / 26...10
	VDE	- / - / 2.5 mm <sup>2</sup>	- / - / 2.5 mm <sup>2</sup>	- / - / 4 mm <sup>2</sup>	- / - / 4 mm <sup>2</sup>
Torque	Nm (lb. in.)	0.51 (4.5)	0.51 (4.5)	1 (9.0)	1 (9.0)
Clamping Screw	M	2.5	2.5	3	3
<b>End plate/partition</b>					
	(Thickness 1.5 mm)	Wemid	WAP <b>1084000000</b>	WAP <b>1084000000</b>	WAP <b>1084000000</b>
	(Thickness 3.0 mm)	Blue Wemid	WAP <b>1084080000</b>	WAP <b>1084080000</b>	WAP <b>1084080000</b>
<b>Jumpers</b>					
	2-pole	ZQV 2.5N/2 <b>169380</b>	ZQV 2.5N/2 <b>169380</b>		
	3-pole	ZQV 2.5N/3 <b>169381</b>	ZQV 2.5N/3 <b>169381</b>		
	4-pole	ZQV 2.5N/4 <b>169382</b>	ZQV 2.5N/4 <b>169382</b>		
	10-pole	ZQV 2.5N/10 <b>169388</b>	ZQV 2.5N/10 <b>169388</b>		
	2-pole			ZQV 4N/2 <b>1758250000</b>	ZQV 4N/2 <b>1758250000</b>
	3-pole			ZQV 4N/3 <b>1762630000</b>	ZQV 4N/3 <b>1762630000</b>
	4-pole			ZQV 4N/4 <b>1762620000</b>	ZQV 4N/4 <b>1762620000</b>
	10-pole			ZQV 4N/10 <b>1758260000</b>	ZQV 4N/10 <b>1758260000</b>
	Shield Bar LS 2.8	LS2.8 <b>105640</b>	LS2.8 <b>105640</b>	LS2.8 <b>105640</b>	LS2.8 <b>105640</b>
		WQB B/24 <b>157906</b>	WQB B/24 <b>157906</b>	WQB B/24 <b>053520</b>	WQB B/24 <b>053520</b>
				QB 75 <b>052670</b>	QB 75 <b>052670</b>
<b>Tools</b>					
	Screwdriver	SD <b>903701</b>	SD <b>903701</b>	SD <b>903701</b>	SD <b>903701</b>
<b>Marking tags</b>					
	Print				
	Consecutive horizontal	DEK 5/5 <b>473460001</b>	DEK 5/5 <b>473460001</b>	DEK 5/5 <b>473460001</b>	DEK 5/5 <b>473460001</b>
	Consecutive vertical	DEK 5/5 <b>473560001</b>	DEK 5/5 <b>473560001</b>	DEK 5/5 <b>473560001</b>	DEK 5/5 <b>473560001</b>

Note: Part numbers shown are for a single card of pre-printed tags numbered 1-50.