


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]					TOOLS
	ENGLISH	METRIC	L ± .03 [0,51]	W ± .01 [0,25]	C ± .02 [0,38]	M ± .03 [0,51]	H ± .01 [0,25]	
EV18-6FB	#6	M3	.86 [21,8]	.30 [7,6]	.21 [5,3]	.69 [17,5]	.15 [3,8]	**CT-100A *CT-160 *CT-260 *CT-400 CT-600-A (CT-500CH) CT-600-A (CT-550CH) CT-1550 CT-1551 CT-2500 (CT-2550CH)
EV18-8FB	#8	M4	.93 [23,6]	.32 [8,1]	.25 [6,4]	.73 [18,5]	.17 [4,3]	
EV18-10FB	#10	M5	.93 [23,6]	.35 [8,9]	.25 [6,4]	.75 [19,1]	.20 [5,1]	

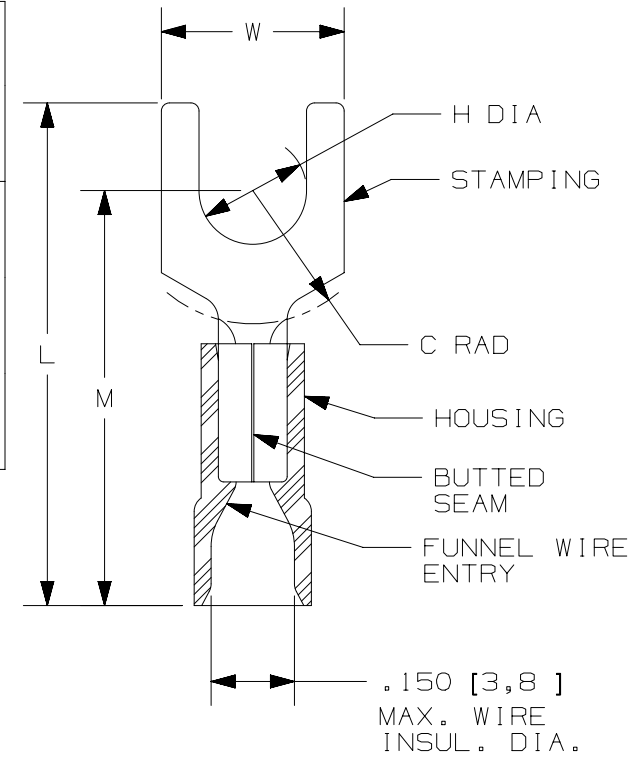

\*\*167°F [75°C] MAX. OPERATING TEMPERATURE WITH CT-100A  
 \*PANDUIT APPROVED TOOL

NOTES:

- cULus LISTED FOR:
  - A. 22-18 AWG [0,5-1,0 mm<sup>2</sup>] SOLID OR STRANDED COPPER WIRE
  - B. 221°F [105°C] MAX. OPERATING TEMPERATURE
  - C. 600V. MAX. BLDG WIRE (1000 V. MAX. IN SIGNS, FIXTURES & LUMINAIRES)
- MATERIAL:
  - A. STAMPING: .032" [0,8] THK COPPER, TIN PLATED
  - B. HOUSING: VINYL, RED
- WIRE STRIP LENGTH: 5/16" <sup>+1/32</sup><sub>-0</sub> [7,9mm <sup>+0,8</sup><sub>-0</sub>]
- SEE [www.panduit.com](http://www.panduit.com) FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT



TITLE		STRONGHOLD FORK TERMINALS VINYL INSULATED, BUTTED SEAM #22-18 AWG CUSTOMER DRAWING		
ITEM REVISION NAME		00123SHP/00		
DATASET FILE NAME		00123SHP_DC/00		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]				
DRAWING NUMBER:		SH41194		
REV	DATE	BY	CHK	APR
00	2/18	JHNU	TMR	RGB
DESCRIPTION		RELEASED		
ECN		00123SH		
DRAWN BY	DATE	CHK	SCALE	SIZE
FES	-	FS	N.T.S.	A

D10100DA/12