


SACC-M12MS-4SC M

Order No.: 1513716

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1513716>

Sensor/actuator connector, male, straight, 4-pos., M12, A-coded,
spring-cage connection, metal knurl, cable cross section max. 8 mm

Commercial data

GTIN (EAN)	 4 017918 946548
sales group	D120
Pack	1 pcs.
Customs tariff	85366990
Catalog page information	Page 33 (PC-2007)

Product notes

WEEE/RoHS-compliant since:
11/10/2006



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data

General data

Rated current at 40°C	4 A
Rated voltage	250 V
Number of positions	4
Volume resistance	≤ 8 mΩ
Insulation resistance	≥ 100 MΩ

Ambient temperature (operation)	-40 °C ... 85 °C (Male connector / female connector)
General characteristics	
Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	PA 66
Material of grip body	PA 66
Material, knurls	Zinc die-cast, (nickel-plated)
Sealing material	Neoprene
Type of connection	Spring-cage conn.
Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	0.5 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	20
External cable diameter	4 mm ... 8 mm
Status display	No


Certificates / Approvals




Certification CUL, UL

Diagrams/Drawings

Functional drawing

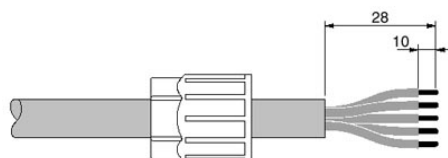


Dimensioned drawing

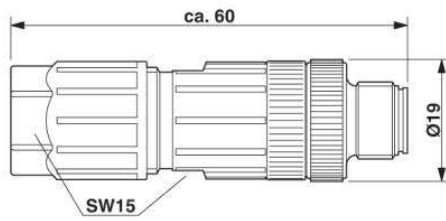

M12 x 1 male connector, straight

Schematic diagram

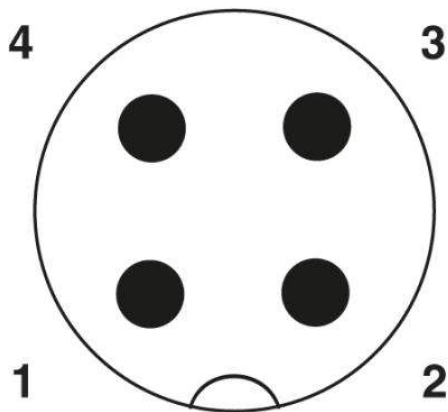

Pin assignment M12 plug, 4-pos., A-coded, view plug side

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;