
GSM / 868MHz YAGI Antenna



+23dB Gain GSM Antenna

Features

- 860 960MHz
- 1770—1880MHz
- +23dBi Gain
- Weight: 2KG
- VSWR <2:1
- Vertical Polarisation
- 10m RG58 to SMA(M)
- 50Ω Impedance
- Aluminium & ABS
- 18 elements
- U Bolt Fixing
- Wall Mount Bracket
- Operates from -40 to 80°C
- Dimensions: L133cm, W23cm, H10cm

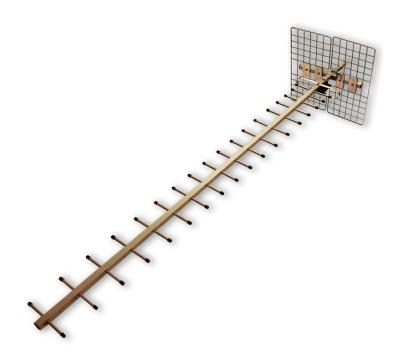

Applications

- GSM Applications
- 868MHz M2M
- M2M Applications

Description

A High Gain antenna for improving the range achieved in GSM applications and Low Power Radio at 868MHz.


Ordering Information

Part No	Description	
ANT-MF-YAG23	+23dB GSM YAGI Antenna to SMA (male)	







Mechanical Detail

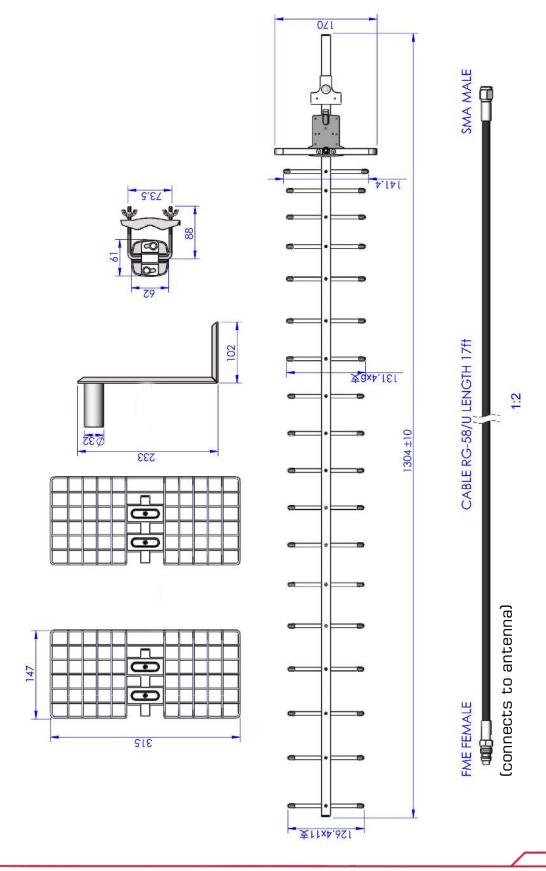




Passive Measurement—pattern and gain (X-Z

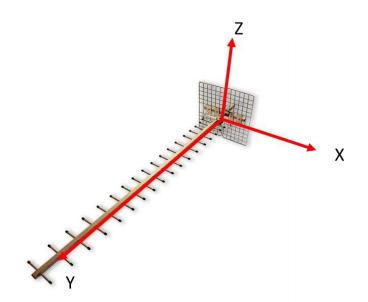




Vertical	Max (dBi)	Min (dBi)	Average (dBi)
700	10.993	-7.897	3.77
824	13.816	-19.715	4.57
880	13.779	-27.337	3.94
915	14.961	-22.044	4.18
960	13.631	-22.149	3.99
Horizonta	Max (dBi)	Min (dBi)	Average (dBi)
700	-7.34	-32.039	-11.99
824	-4.271	-33.072	-10.46
880	-3.772	-33.041	-9.99
915	-3.985	-37.953	-9.27
960	-3.498	-29.605	-9.61
Total power	Max (dBi)	Min (dBi)	Average (dBi)
700	11.01	-7.67	3.89
824	13.96	-18.65	4.66
880	13.99	-21.61	4.15
915	14.62	-17.90	4.34
960	13.90	-19.86	4.11

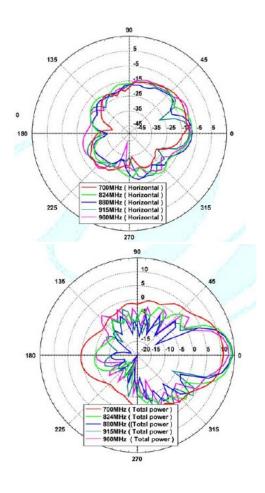






Passive Measurement—pattern and gain (X-Z



Vertical	Max (dBi)	Min (dBi)	Average (dBi)
700	-7.421	-34.428	-10.47
824	-6.026	-27.585	-9.16
880	-5.937	-31.394	-9.29
915	-5.925	-30.776	-9.94
960	-5.789	-39.129	-9.85
Horizontal	Max (dBi)	Min (dBi)	Average (dBi)
700	10.788	-24.694	3.09
824	14.594	-30.81	4.89
880	14.782	-26.389	4.88
915	15.116	-31.92	5.06
960	15.124	-26.891	4.82
Total power	Max (dBi)	Min (dBi)	Average (dBi)
700	11.84	-18.46	3.17
824	14.63	-21.40	4.99
880	14.82	-24.32	4.91
915	15.58	-28.67	5.10
960	15.05	-22.98	5.11










Performance Data

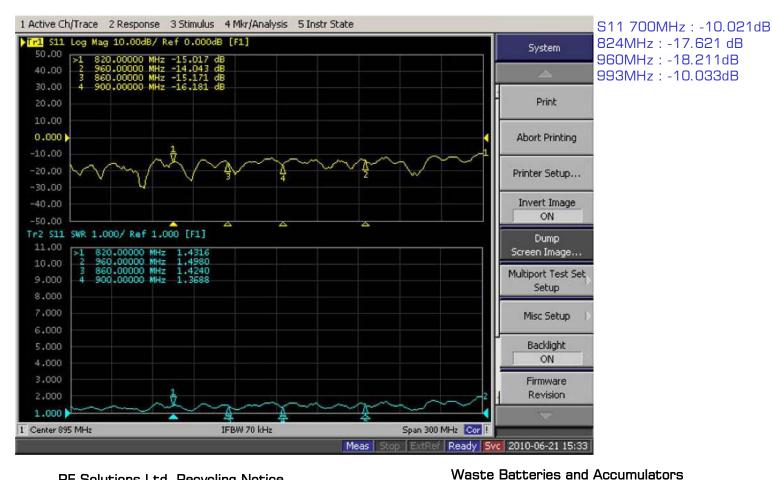

RF Solutions Ltd. Recycling Notice

Meets the following EC Directives:

DO NOT

Discard with normal waste, please recycle.

ROHS Directive 2011/65/EU and amendment 2015/863/EU

Specifies certain limits for hazardous substances.

WEEE Directive 2012/19/EU

Waste electrical & electronic equipment. This product must be disposed of through a licensed WEEE collection point. RF Solutions Ltd., fulfils its WEEE obligations by membership of an approved compliance scheme. Environment Agency producer registration number: WEE/ JB0104WV.

Disclaimer:

Whilst the information in this document is believed to be correct at the time of issue, RF Solutions Ltd does not accept any liability whatsoever for its accuracy, adequacy or completeness. No express or implied warranty or representation is given relating to the information contained in this document. RF Solutions Ltd reserves the right to make changes and improvements to the product(s) described herein without notice. Buyers and other users should determine for themselves the suitability of any such information or products for their own particular requirements or specification(s). RF Solutions Ltd shall not be liable for any loss or damage caused as a result of user's own determination of how to deploy or use RF Solutions Ltd's products. Use of RF Solutions Ltd products or components in life support and/or safety applications is not authorised except with express written approval. No licences are created, implicitly or otherwise, under any of RF Solutions Ltd's intellectual property rights. Liability for loss or damage resulting or caused by reliance on the information contained herein or from the use of the product (including liability resulting from negligence or where RF Solutions Ltd was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict RF Solutions Ltd's liability for death or personal injury resulting from its negligence.

Directive 2006/66/EC

collection point.

Where batteries are fitted, before

recycling the product, the batteries must

be removed and disposed of at a licensed