
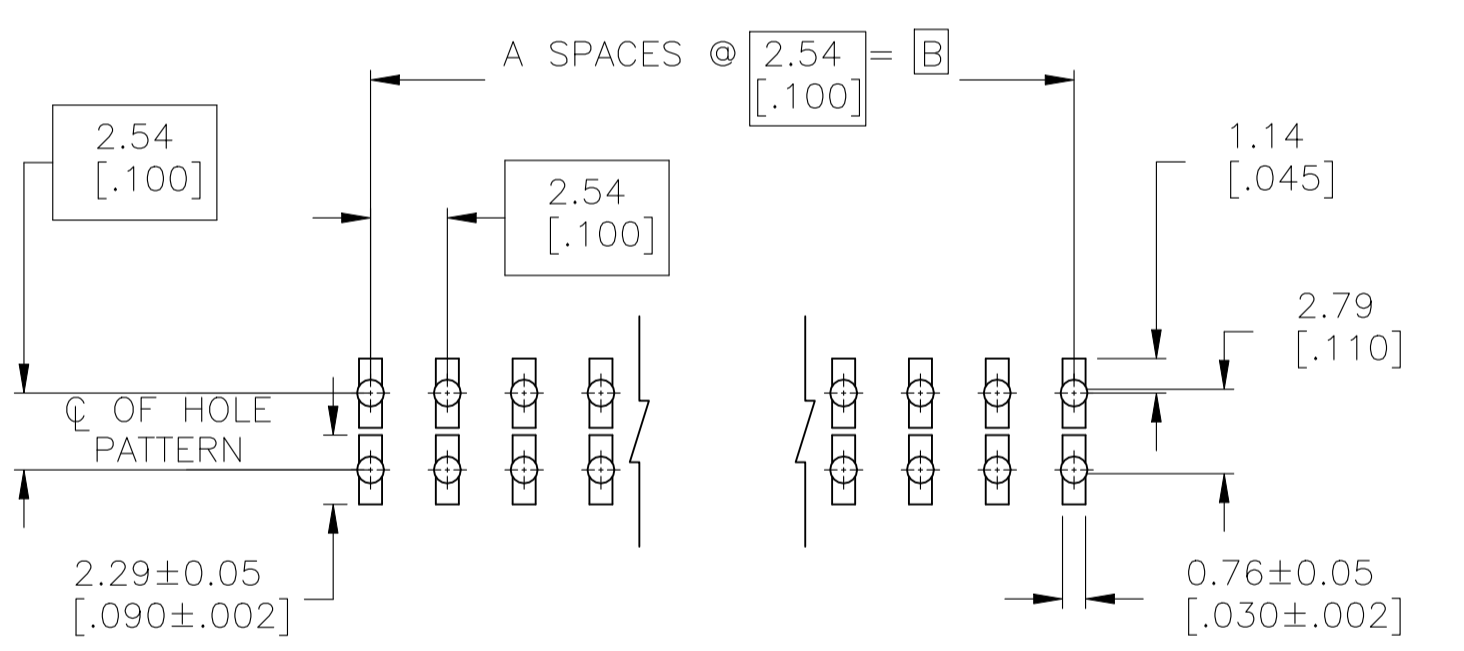


REVISIONS					
REV	DATE	DESCRIPTION	BY	CHK	APPV
D2	01JUN2022	REVISED PER ECN-22-156633	RK	MF	

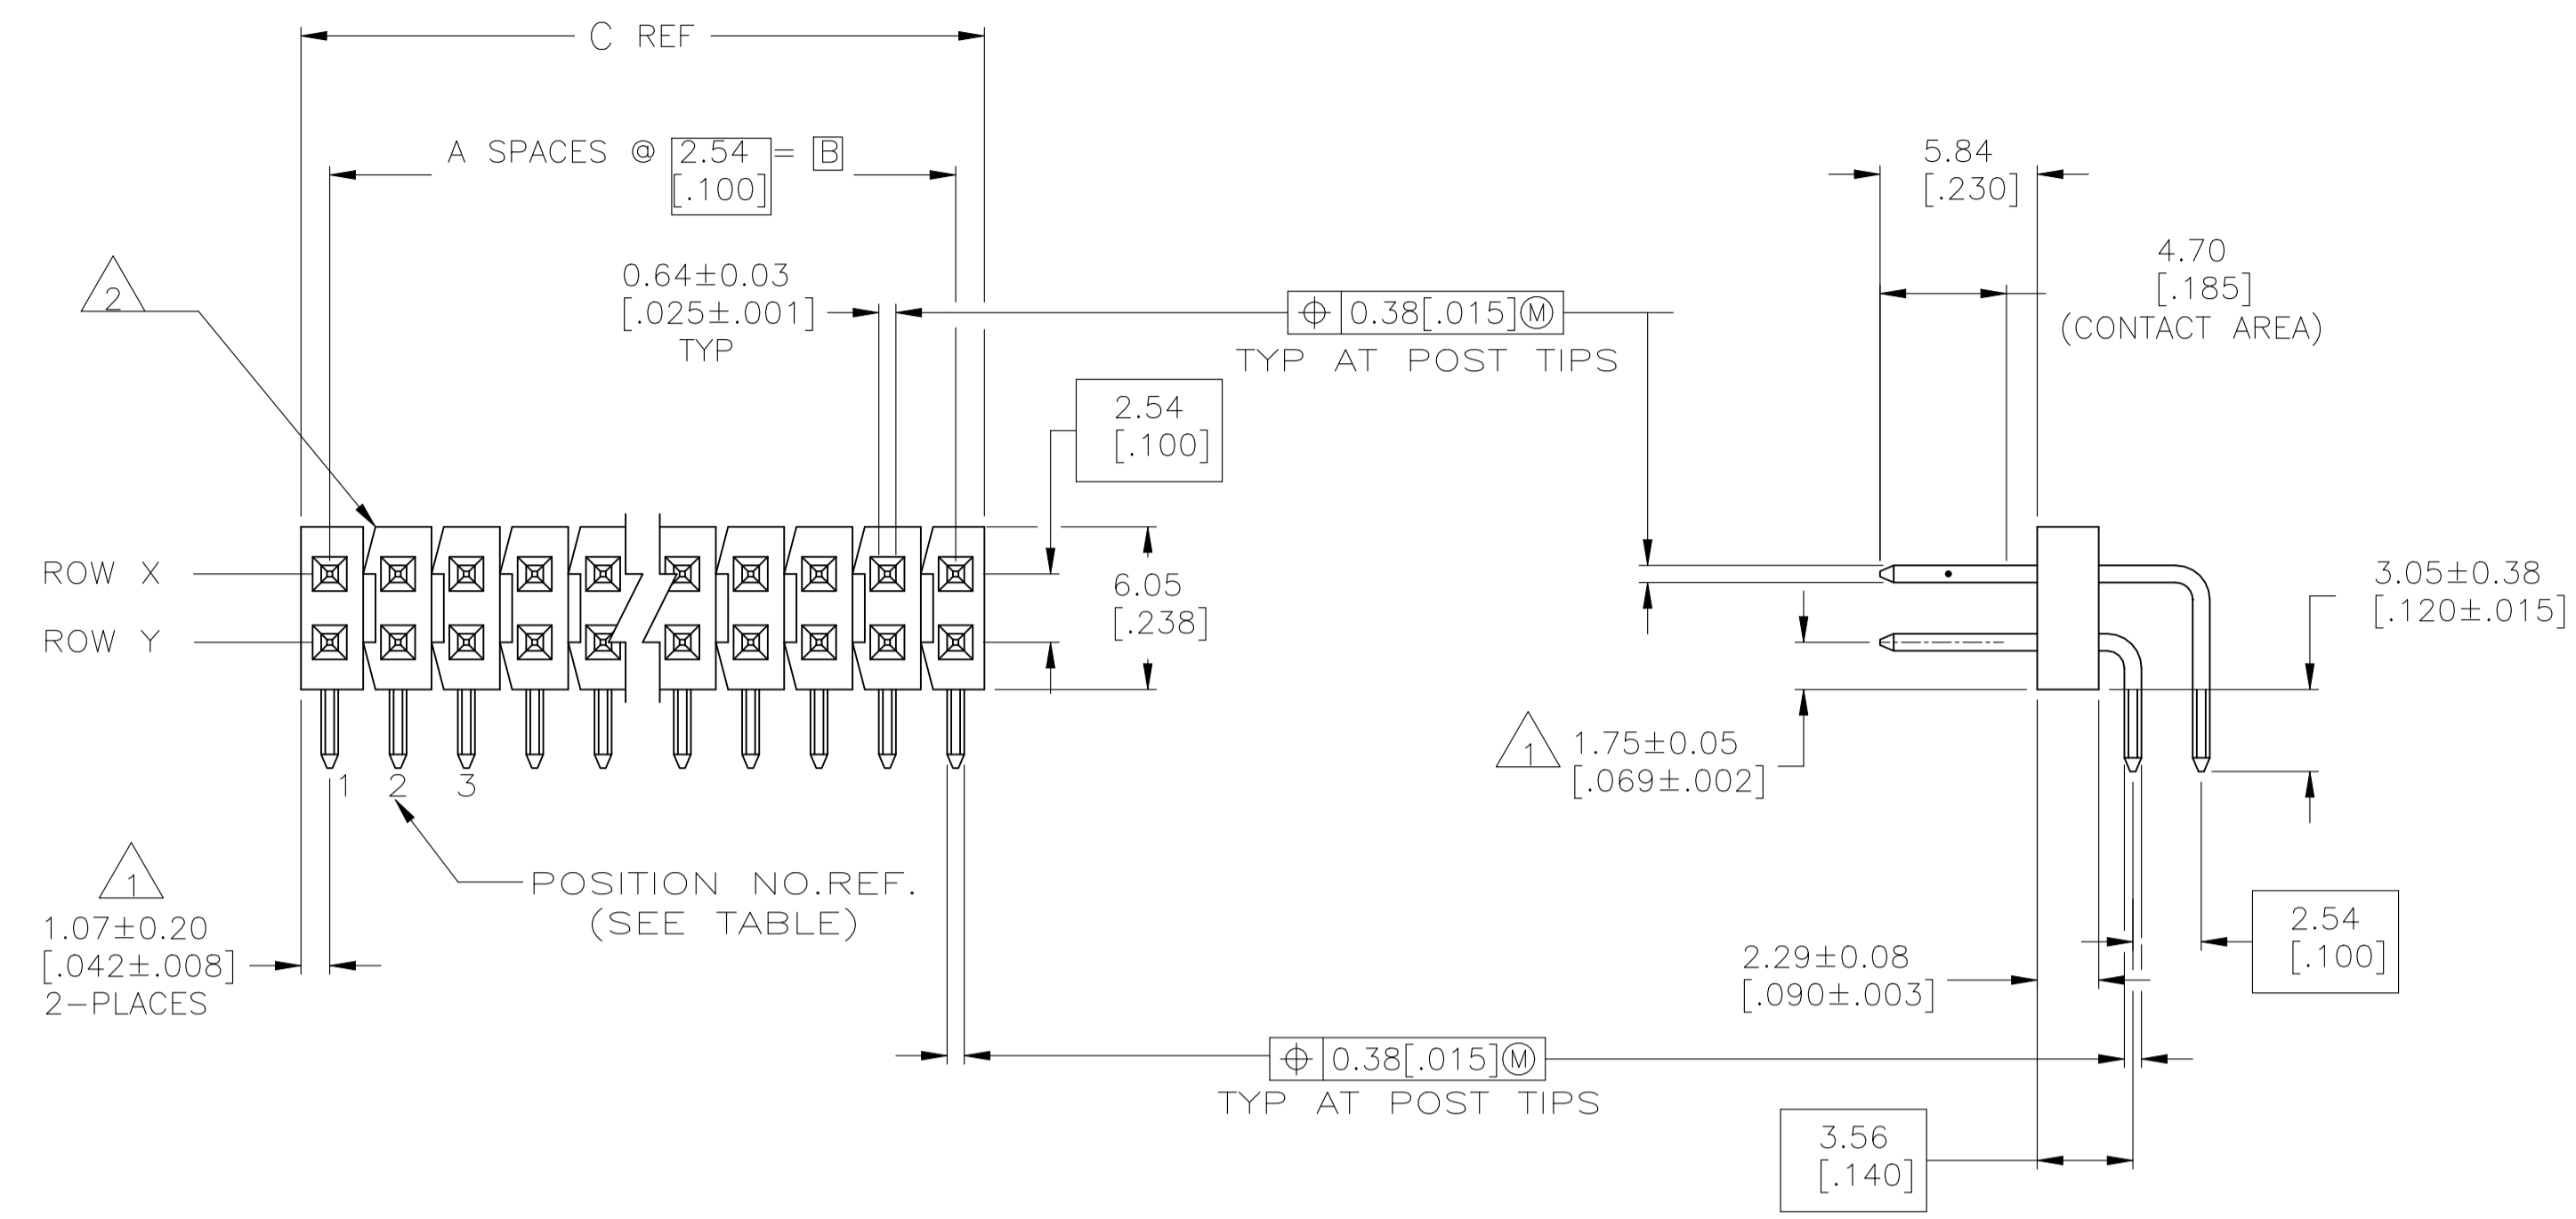

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063 [1.60] THICK PC BOARD AND .012 [.305] STENCIL THICK.

- 1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 2 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 3 GLASS FILLED THERMOPLASTIC (THAT WILL WITHSTAND IR REFLOW PROCESSING) COLOR: BLACK, POST: COPPER ALLOY.
- 4 0.000762 [.000030] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ALL OVER 0.00127 [.000050] NICKEL.
- 5 PARTS PACKAGED IN TUBES.
- 6 0.000762 [.000030] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ALL OVER 0.00127 [.000050] NICKEL.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 8 OBSOLETE

OBSOLETE	PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER	PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER	
													7
6	6	101.19 [3.984]	99.06 [3.900]	39	80	9-146308-0	8	4	101.19 [3.984]	99.06 [3.900]	39	80	4-146308-0
6	6	98.65 [3.884]	96.52 [3.800]	38	78	8-146308-9	7	4	98.65 [3.884]	96.52 [3.800]	38	78	3-146308-9
6	6	96.11 [3.784]	93.98 [3.700]	37	76	8-146308-8	7	4	96.11 [3.784]	93.98 [3.700]	37	76	3-146308-8
6	6	93.57 [3.684]	91.44 [3.600]	36	74	8-146308-7	7	4	93.57 [3.684]	91.44 [3.600]	36	74	3-146308-7
6	6	91.03 [3.584]	88.90 [3.500]	35	72	8-146308-6	7	4	91.03 [3.584]	88.90 [3.500]	35	72	3-146308-6
6	6	88.49 [3.484]	86.36 [3.400]	34	70	8-146308-5	7	4	88.49 [3.484]	86.36 [3.400]	34	70	3-146308-5
6	6	85.95 [3.384]	83.82 [3.300]	33	68	8-146308-4	7	4	85.95 [3.384]	83.82 [3.300]	33	68	3-146308-4
6	6	83.41 [3.284]	81.28 [3.200]	32	66	8-146308-3	7	4	83.41 [3.284]	81.28 [3.200]	32	66	3-146308-3
6	6	80.87 [3.184]	78.74 [3.100]	31	64	8-146308-2	7	4	80.87 [3.184]	78.74 [3.100]	31	64	3-146308-2
6	6	78.33 [3.084]	76.20 [3.000]	30	62	8-146308-1	7	4	78.33 [3.084]	76.20 [3.000]	30	62	3-146308-1
6	6	75.79 [2.984]	73.66 [2.900]	29	60	8-146308-0	7	4	75.79 [2.984]	73.66 [2.900]	29	60	3-146308-0
6	6	73.25 [2.884]	71.12 [2.800]	28	58	7-146308-9	7	4	73.25 [2.884]	71.12 [2.800]	28	58	2-146308-9
6	6	70.71 [2.784]	68.58 [2.700]	27	56	7-146308-8	7	4	70.71 [2.784]	68.58 [2.700]	27	56	2-146308-8
6	6	68.17 [2.684]	66.04 [2.600]	26	54	7-146308-7	7	4	68.17 [2.684]	66.04 [2.600]	26	54	2-146308-7
6	6	65.63 [2.584]	63.5 [2.500]	25	52	7-146308-6	7	4	65.63 [2.584]	63.5 [2.500]	25	52	2-146308-6
6	6	63.09 [2.484]	60.96 [2.400]	24	50	7-146308-5	7	4	63.09 [2.484]	60.96 [2.400]	24	50	2-146308-5
6	6	60.55 [2.384]	58.42 [2.300]	23	48	7-146308-4	7	4	60.55 [2.384]	58.42 [2.300]	23	48	2-146308-4
6	6	58.01 [2.284]	55.88 [2.200]	22	46	7-146308-3	7	4	58.01 [2.284]	55.88 [2.200]	22	46	2-146308-3
6	6	55.47 [2.184]	53.34 [2.100]	21	44	7-146308-2	7	4	55.47 [2.184]	53.34 [2.100]	21	44	2-146308-2
6	6	52.93 [2.084]	50.80 [2.000]	20	42	7-146308-1	7	4	52.93 [2.084]	50.80 [2.000]	20	42	2-146308-1
6	6	50.39 [1.984]	48.26 [1.900]	19	40	7-146308-0	8	4	50.39 [1.984]	48.26 [1.900]	19	40	2-146308-0
6	6	47.85 [1.884]	45.72 [1.800]	18	38	6-146308-9	7	4	47.85 [1.884]	45.72 [1.800]	18	38	1-146308-9
6	6	45.31 [1.784]	43.18 [1.700]	17	36	6-146308-8	7	4	45.31 [1.784]	43.18 [1.700]	17	36	1-146308-8
6	6	42.77 [1.684]	40.64 [1.600]	16	34	6-146308-7	8	4	42.77 [1.684]	40.64 [1.600]	16	34	1-146308-7
6	6	40.23 [1.584]	38.10 [1.500]	15	32	6-146308-6	7	4	40.23 [1.584]	38.10 [1.500]	15	32	1-146308-6
6	6	37.69 [1.484]	35.56 [1.400]	14	30	6-146308-5	7	4	37.69 [1.484]	35.56 [1.400]	14	30	1-146308-5
6	6	35.15 [1.384]	33.02 [1.300]	13	28	6-146308-4	7	4	35.15 [1.384]	33.02 [1.300]	13	28	1-146308-4
6	6	32.61 [1.284]	30.48 [1.200]	12	26	6-146308-3	7	4	32.61 [1.284]	30.48 [1.200]	12	26	1-146308-3
6	6	30.07 [1.184]	27.94 [1.100]	11	24	6-146308-2	7	4	30.07 [1.184]	27.94 [1.100]	11	24	1-146308-2
6	6	27.53 [1.084]	25.40 [1.000]	10	22	6-146308-1	8	4	27.53 [1.084]	25.40 [1.000]	10	22	1-146308-1
6	6	24.99 [.984]	22.86 [.900]	9	20	6-146308-0	7	4	24.99 [.984]	22.86 [.900]	9	20	1-146308-0
6	6	22.45 [.884]	20.32 [.800]	8	18	5-146308-9	7	4	22.45 [.884]	20.32 [.800]	8	18	1-146308-9
6	6	19.91 [.784]	17.78 [.700]	7	16	5-146308-8	7	4	19.91 [.784]	17.78 [.700]	7	16	1-146308-8
6	6	17.37 [.684]	15.24 [.600]	6	14	5-146308-7	7	4	17.37 [.684]	15.24 [.600]	6	14	1-146308-7
6	6	14.83 [.584]	12.70 [.500]	5	12	5-146308-6	8	4	14.83 [.584]	12.70 [.500]	5	12	1-146308-6
6	6	12.29 [.484]	10.16 [.400]	4	10	5-146308-5	7	4	12.29 [.484]	10.16 [.400]	4	10	1-146308-5
6	6	9.75 [.384]	7.62 [.300]	3	8	5-146308-4	7	4	9.75 [.384]	7.62 [.300]	3	8	1-146308-4
6	6	7.21 [.284]	5.08 [.200]	2	6	5-146308-3	7	4	7.21 [.284]	5.08 [.200]	2	6	1-146308-3
6	6	4.67 [.184]	2.54 [.100]	1	4	5-146308-2	7	4	4.67 [.184]	2.54 [.100]	1	4	1-146308-2
6	6	-	-	0	2	5-146308-1	8	4	-	-	0	2	1-146308-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIN T. HOFFMAN 08MAY95
 CHK G. DUBNICZKI 07JUN95
 APPV G. DUBNICZKI 07JUN95

TE Connectivity

HDR ASSY,MODII,BRKAWAY, RT ANG,DBLE ROW,HIGH TEMP, .100X.100 C/L,W/.025 SQRE PTS

SIZE A1 CAGE CODE 00779 DRAWING NO. 146308 RESTRICTED TO

WEIGHT --

CUSTOMER DRAWING SCALE 4:1 SHEET 1 of 1 REV D2