
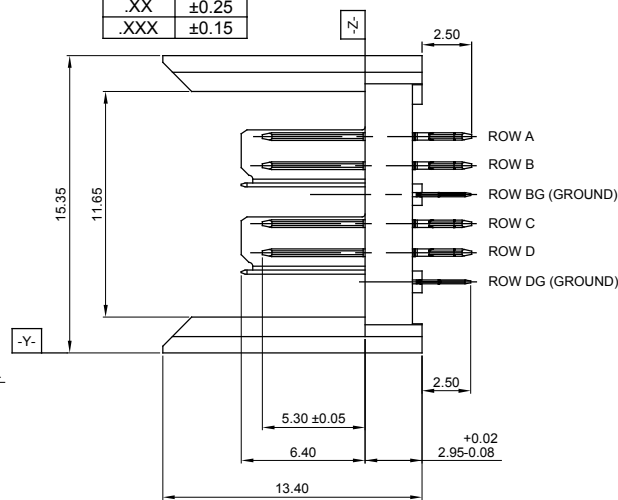


TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.35
.XX	±0.25
.XXX	±0.15



THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO MASTER.  
UNLESS OTHERWISE SPECIFIED, ALL RADIUS ARE 0.2 MM.

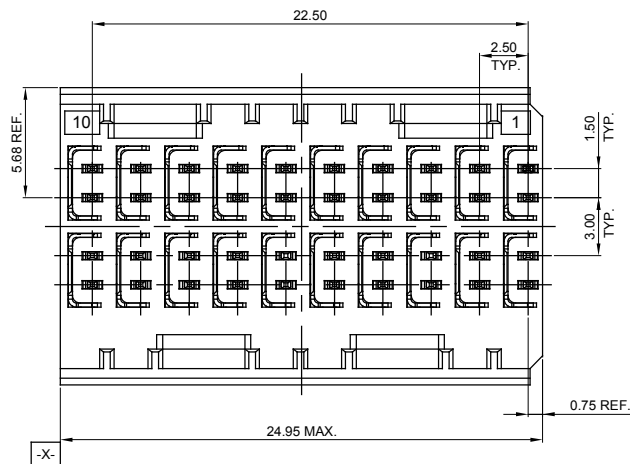



NOTES:

- MATERIAL: LCP+30% GLASS REINFORCED, UL94V-0  
 HOUSING: PHOSPHOR BRONZE  
 SHIELD: NICKEL PLATING  
 CONTACT: PHOSPHOR BRONZE  
 GOLD FLASH PLATING ON CONTACT AREA  
 MATTE TIN PLATING 30-100µ" ON SOLDER  
 TAIL OVER NICKEL 50-150µ" UNDER PLATING

PCB HOLE DIM:  
 DRILLED HOLE = 0.700±0.025mm  
 FINISHED HOLE = 0.600±0.050mm  
 Cu THICKNESS = 0.0375±0.0125mm  
 SnPb THICKNESS = 0.007±0.003mm

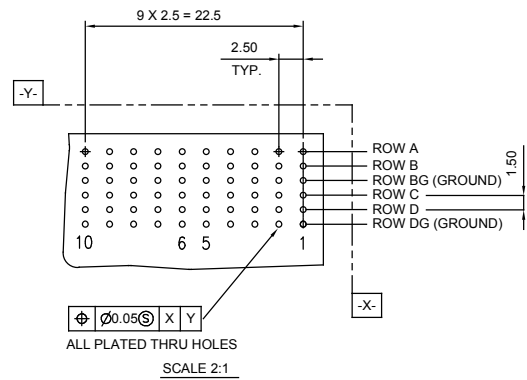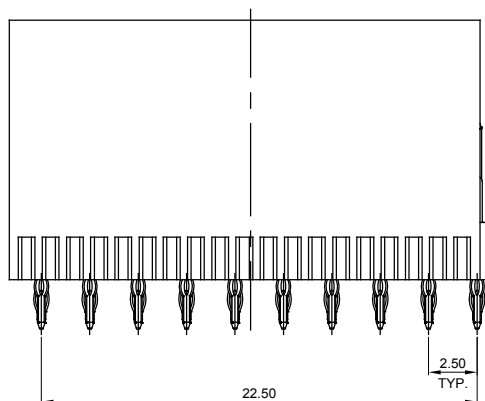

ALL PLATED THRU HOLES  
 SCALE 2:1

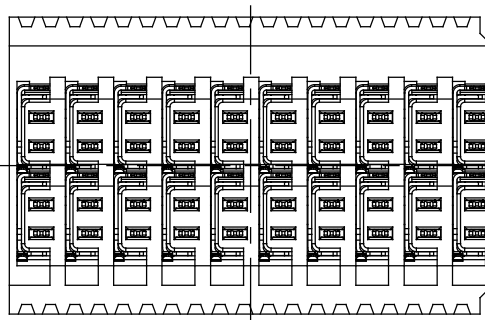

ZD CONNECTOR, MALE, VERTICAL, 2 PAIR

ACAD REFERENCE NO.: 500-040-231-C01

DRAWN: W.T DATE: JUNE.27 /2018

CHECKED: DATE:

SCALE: N.T.S SHEET 1 OF 1

DRAWING NUMBER: 500-040-231-C01

ISSUE

PART NUMBER: 500-040-231-C01

1



THIS SERIES FULLY CONFORMS TO  
 THE EUROPEAN UNION DIRECTIVES  
 2011/65/EU FOR RoHS COMPLIANCY.



EDAC INC  
 TORONTO, ONTARIO  
 CANADA  
 YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS  
 ARE THE PROPERTY OF EDAC INC., AND  
 SHALL NOT BE REPRODUCED, OR COPIED  
 OR USED AS THE BASIS FOR THE  
 MANUFACTURE OR SALE OF APPARATUS  
 WITHOUT WRITTEN PERMISSION.