


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00057	Connector, dc jack, 3.5x1.35xL16.5 mm, molding style	1	
2	30-00405	Wire, 2C TS, 24 AWG, UL2468, 300V, 80C, 3.0 mm, VW-1, PVC, 87A, white	1	
3	24-00005	Overmold, PVC, white	1	

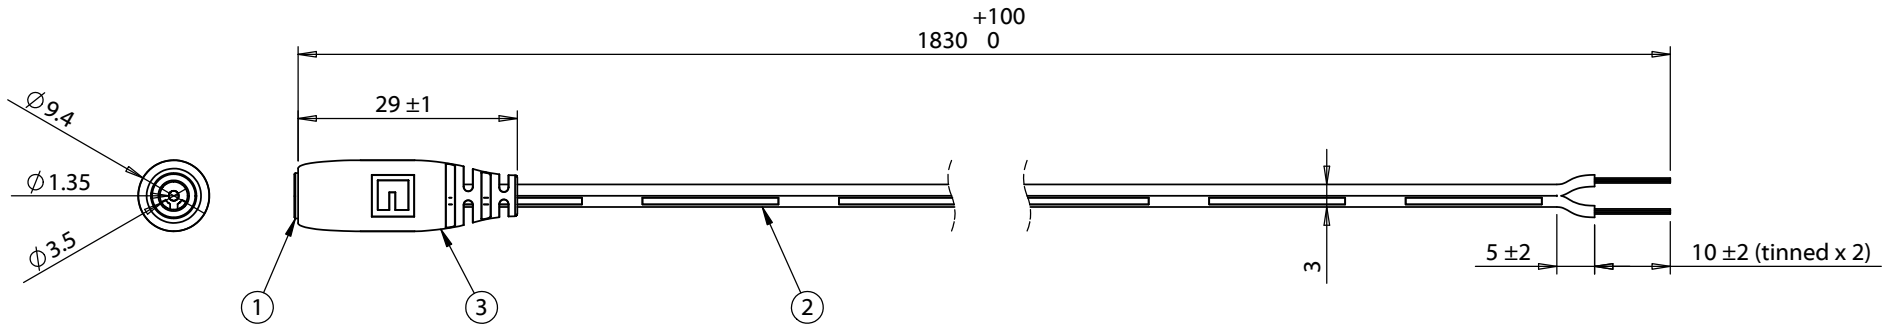

Notes:
 Cables individually tied and bundled in groups of 10
 Functionally equivalent components may be substituted
 4 A, 12 Vdc

Wiring Diagram	
50-00057	wire color
center	white with stripe
sleeve	white

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	12/22/2015	Initial release	GL 2016.05.19 09:10:04 -07'00'	RoHS compliant	
			Verified: LA Digitally signed by LA DN: cn=LA, o=Family, ou=Engineering, email=200521@tensility.com, c=US, Date: 2016.06.01 17:25:21 -07'00'	Function test: no open, no short circuit, no intermittent	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 3.5x1.35 mm 50-00057 dc jack to stripped tinned, 24 AWG, 30-00405 wire, white	
				Size: A Part number: 10-01268	

Scale: 1:2  Sheet 1 of 1