
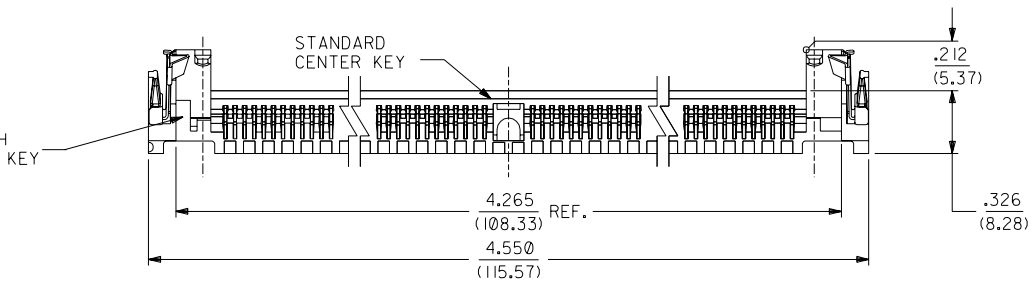


"SIMM" P.C. BOARD LAYOUT

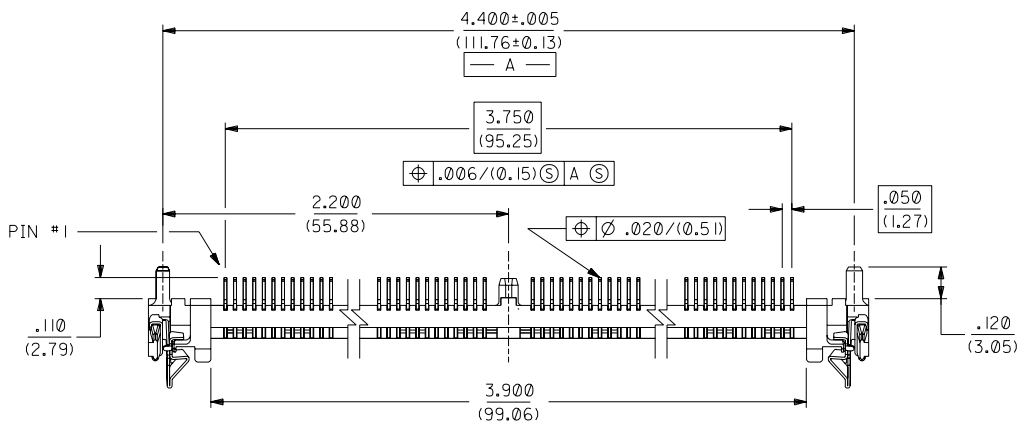

- NOTES:
- CARD SLOT ACCEPTS P.C. BOARDS .050 +.004/-0.003 THICK, MEASURED OVER CONTACT PADS. (1.27 +0.10/-0.08)
  - PRODUCT SPEC PS-78954 APPLIES.
  - LOCATION OF LOWER CORNER OF MODULE BOARD.
  - CENTER PEG IS AN INTERFERENCE FIT TO RECOMMENDED P.C. BOARD HOLE.

MATERIALS:


HOUSING: LCP, GLASS FILLED, 94V-0. COLOR: BLACK.

LATCH: STAINLESS STEEL.

TERMINAL: PHOSPHOR BRONZE, POST PLATED

30μIN./(.76μm) MIN. GOLD IN CONTACT AREA AND 150μIN./(.381μm) MIN. TIN IN TAIL AREA OVER 75μIN./(.191μm) MIN. NICKEL OVERALL.

\*THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.

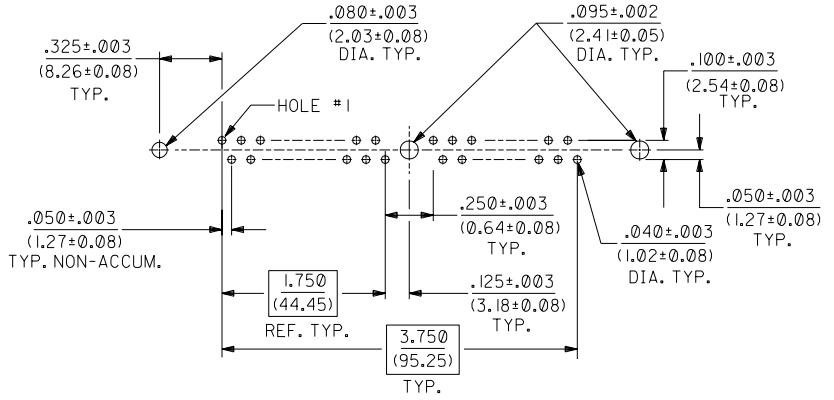

RECOMMENDED SOCKET P.C. BOARD HOLE PATTERN

L	LEAD FREE UCP2004-1582 RWHITE 04/02/25
K	REVISED PER ECN #U51394 GMY 7-24-95
J	REVISED PEG LENGTH PER ECN #U30751 MJS 6-8-93
I	REMOVED TRACKING TOES PER ECN #U20914 PDB 06-17-92
H	REVISED NOTES PER ECN #U11964 PDB 10-03-91
G	CORRECT HOLE PATTERN PER ECN #U11922 PDB 09-25-91
F	REVISED MASTER PER ECN #U11822 PDB 09-04-91
E	.150 WAS .120 PER ECN #U10303 PDB 01-22-91
D	REVISED PER ECN #U00846 PDB 10-25-90
C	REVISED PER ECN #U00620 PDB 08-24-90
B	REVISED PER ECN #U00635 PDB 08-20-90
A	RELEASE TO MFG. PER ERO #30233 PDB 08-07-90

DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°		▽ = 0 ▽ = 0 REVISION ONLY ON CAD SYSTEM	
TITLE		SALES ASSEMBLY	
2 PLACE ± .010 ---		22.5° METAL LATCH HIGH KEY	
1 PLACE --- ± 0.25		SINGLE ROW SIMM SOCKET	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MOLEX INCORPORATED SHEET NO. DATE U.S.A. 1 OF 1 08/07/90	
PART NO. 15-82-0675		DRWG. NO. SDA-78964-7232	
DRWG. PDB		FILE NAME S78964-18.DGN	
BY		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
SCALE 2:1		DIV. SIZE C	