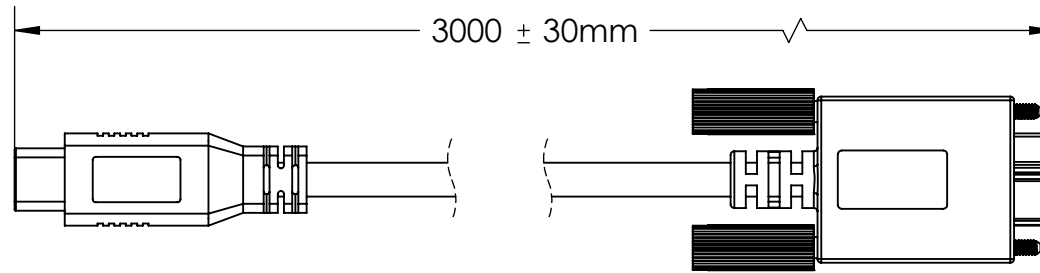
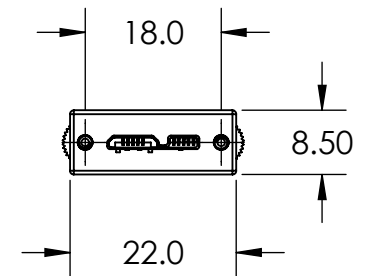
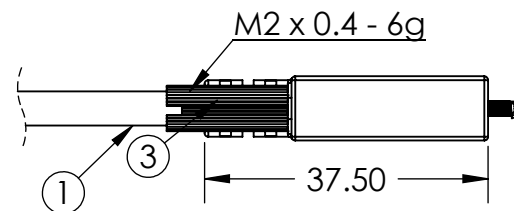
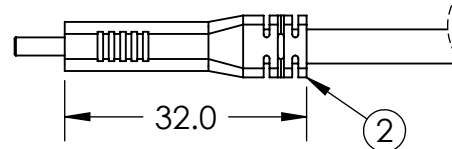
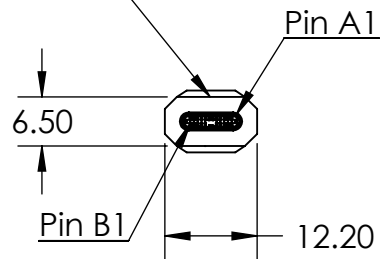


NEWNEX PROPRIETARY

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WITHIN IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR PART TO ANYONE WITHOUT THE WRITTEN PERMISSION OF NEWNEX

COMPANY NAME**CUSTOMER SIGNATURE****DATE****COMMENTS:**Top Side As Blank**WIRING STRUCTURE**

Type C	SIGNAL NAME	Micro B
A4,B4,A9,B9	VBUS	1
A5	CC	NC
A7	Dn1	2
A6	Dp1	3
A1,B1,A12,B12	GND+Drain	5,8
B10	SDPn1	6
B11	SDPp1	7
A3	SDPn2	9
A2	SDPp2	10
SHELL	Shield	SHELL

Rd=5.1kΩ

Notes:

1. Cable: USB 3.1 Black PVC Jacket.
2. Connector: USB 3.1 Type C Male With Rd.
3. Connector: USB 3.1 Micro B Male Locking
4. Packaging: 1 Piece + PE bag.

Newnex Technology Corp.



UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES ARE:

FRACTIONS DECIMALS ANGLES
X ± 0.5
XX ± 0.25
XXX ± 0.125



SCALE: 1:1
REV: A

DATE: 10/11/2019

TITLE: USB 3.1 Type C Male to Micro B Locking, 3M, Black.

DRAWN BY: AC

APPROVED BY: XW

PART NUMBER: U3S1C21MCI-030

CHECKED BY:

SHEET 1 OF 1

*100% OPEN, SHORT, MISWIRE TESTING

*RoHS compliant product

*Both shell clam and copper foil have 360 degree contact with braiding

Drawing generated