



RONIS key-operated switch, 22 mm, round, metal, shiny, lock number SB30, with 2 keys, 2 switch positions O-I, latching, actuating angle 90°, 10:30h/13:30h, key removal O+I, with holder, 1 NO, spring-type terminal, possible special locks: SB31, 421, 455

|   |  |
|---|--|
| <b>product brand name</b>   | SIRIUS ACT   |
| <b>product designation</b>  | Key-operated switches  |
| <b>design of the product</b>  | Complete unit  |
| <b>product type designation</b>   | 3SU1   |
| <b>product line</b>   | Metal, shiny, 22 mm  |
| <b>manufacturer's article number</b>  |  |
| <ul style="list-style-type: none"> <li>• of included key</li> <li>• of supplied contact module</li> <li>• of supplied contact module at position 1</li> <li>• of the supplied holder</li> <li>• of the supplied actuator</li> </ul> | <a href="#">3SU1950-0FB80-0AA0</a><br><a href="#">3SU1400-1AA10-3BA0</a><br><a href="#">3SU1400-1AA10-3BA0</a><br><a href="#">3SU1550-0AA10-0AA0</a><br><a href="#">3SU1050-4BF11-0AA0</a> |
| <b>Enclosure</b>  |  |
| <b>shape of the enclosure front</b>   | round  |
| <b>number of command points</b>   | 1  |
| <b>Actuator</b>   |  |
| <b>principle of operation of the actuating element</b>  | latching, 90° (10:30 h/13:30 h)  |
| <b>product extension optional light source</b>  | No   |
| <b>color of the actuating element</b>   | silver   |
| <b>material of the actuating element</b>  | metal  |
| <b>shape of the actuating element</b>   | Key  |
| <b>outer diameter of the actuating element</b>  | 29.5 mm  |
| <b>number of contact modules</b>  | 1  |
| <b>number of switching positions</b>  | 2  |
| <b>switch position for key distraction</b>  | O+I  |
| <b>actuating angle</b>  |  |
| <ul style="list-style-type: none"> <li>• clockwise</li> </ul>   | 90°  |
| <b>lock make</b>  | RONIS  |
| <b>key number</b>   | SB30   |
| <b>Front ring</b>   |  |
| <b>product component front ring</b>   | Yes  |
| <b>design of the front ring</b>   | Standard   |
| <b>material of the front ring</b>   | Metal, high gloss  |
| <b>color of the front ring</b>  | silver   |
| <b>Holder</b>   |  |
| <b>material of the holder</b>   | Metal  |
| <b>General technical data</b>   |  |
| <b>product function positive opening</b>  | No   |
| <b>product component light source</b>   | No   |
| <b>insulation voltage rated value</b>   | 500 V  |

|  |   |
|--|---|
| <b>degree of pollution</b>                                     | 3   |
| type of voltage of the operating voltage                       | AC/DC   |
| <b>surge voltage resistance rated value</b>                    | 6 kV  |
| <b>protection class IP</b>                                     | IP66, IP67, IP69(IP69K)   |
| • of the terminal  | IP20  |
| <b>degree of protection NEMA rating</b>                        | 1, 2, 3, 3R, 4, 4X, 12, 13  |
| <b>shock resistance</b>  |   |
| • according to IEC 60068-2-27                                  | sinusoidal half-wave 15g / 11 ms  |
| <b>vibration resistance</b>                                    |   |
| • according to IEC 60068-2-6                                   | 10 ... 500 Hz: 5g   |
| <b>operating frequency maximum</b>                             | 1 800 1/h   |
| mechanical service life (switching cycles) typical             | 300 000   |
| electrical endurance (switching cycles) typical                | 10 000 000  |
| <b>thermal current</b>   | 10 A  |
| <b>reference code according to IEC 81346-2</b>                 | S   |
| <b>continuous current of the C characteristic MCB</b>          | 10 A; for a short-circuit current smaller than 400 A  |
| <b>continuous current of the quick DIAZED fuse link</b>        | 10 A  |
| <b>continuous current of the DIAZED fuse link gG</b>           | 10 A  |
| <b>Substance Prohibitance (Date)</b>                           | 10/01/2014  |
| <b>operating voltage</b>                                       |   |
| • rated value  | 5 ... 500 V   |
| • at AC  |   |
| — at 50 Hz rated value   | 5 ... 500 V   |
| — at 60 Hz rated value   | 5 ... 500 V   |
| • at DC rated value  | 5 ... 500 V   |
| <b>Power Electronics</b>                                       |   |
| <b>contact reliability</b>                                     | One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA)  |
| <b>Auxiliary circuit</b>                                       |   |
| <b>design of the contact of auxiliary contacts</b>             | Silver alloy  |
| <b>number of NC contacts for auxiliary contacts</b>            | 0   |
| <b>number of NO contacts for auxiliary contacts</b>            | 1   |
| <b>Connections/ Terminals</b>                                  |   |
| <b>type of electrical connection</b>                           |   |
| • of modules and accessories                                   | Spring-type terminal  |
| <b>type of connectable conductor cross-sections</b>            |   |
| • solid without core end processing                            | 2x (0.25 ... 1.5 mm <sup>2</sup> )  |
| • finely stranded with core end processing                     | 2x (0.25 ... 0.75 mm <sup>2</sup> )   |
| • finely stranded without core end processing                  | 2x (0.25 ... 1.5 mm <sup>2</sup> )  |
| • at AWG cables  | 2x (24 ... 16)  |
| <b>tightening torque of the screws in the bracket</b>          | 1 ... 1.2 N·m   |
| <b>Ambient conditions</b>                                      |   |
| <b>ambient temperature</b>                                     |   |
| • during operation   | -25 ... +70 °C  |
| • during storage   | -40 ... +80 °C  |
| environmental category during operation according to IEC 60721 | 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted for all devices behind front panel) |
| <b>Installation/ mounting/ dimensions</b>                      |   |
| <b>fastening method</b>  |   |
| • of modules and accessories                                   | Front plate mounting  |
| <b>height</b>  | 40 mm   |
| <b>width</b>   | 30 mm   |
| <b>shape of the installation opening</b>                       | round   |
| <b>mounting diameter</b>                                       | 22.3 mm   |
| <b>positive tolerance of installation diameter</b>             | 0.4 mm  |
| <b>mounting height</b>   | 49.4 mm   |
| <b>installation width</b>                                      | 29.5 mm   |
| <b>installation depth</b>                                      | 49.7 mm   |
| <b>Certificates/ approvals</b>                                 |   |

General Product Approval

Declaration of Conformity



[Confirmation](#)



EG-Konf.

Declaration of Conformity

Test Certificates

Marine / Shipping



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



ABS



LRS



PRS

Marine / Shipping

other



RINA



RMRS

[Environmental Confirmations](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1150-4BF11-3BA0>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1150-4BF11-3BA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1150-4BF11-3BA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1150-4BF11-3BA0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1150-4BF11-3BA0&lang=en)

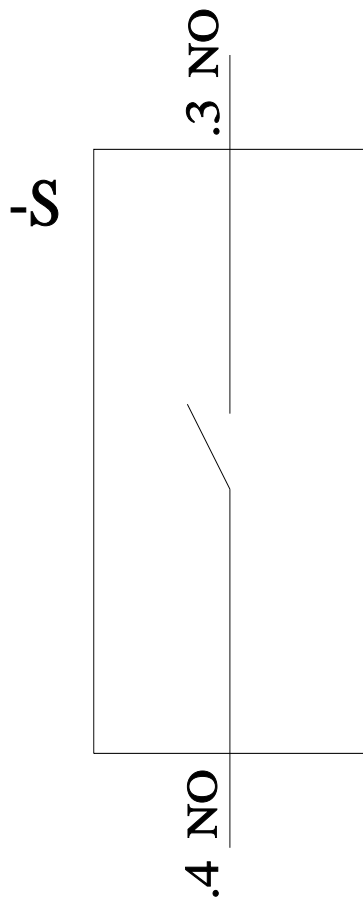

last modified:

1/27/2022 