


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
-	CLASS A RELEASED	7/11/99	
A	UPDATED FORMAT w/ CAGE CODE	4/18/04	

- DO-IT-YOURSELF (DIY) 4mm STACKING BANANA PLUG, SCREW ATTACHMENT
- SPECIFICATIONS:  
 INSULATOR BODY: POLYAMIDE (NYLON)  
 PLUG BODY: BRASS, NICKEL PLATED  
 CONTACT SPRING: BERYLLIUM COPPER ALLOY, NICKEL PLATED
- RATING:  
 IEC: <33 V AC / <70 V DC  
 VOLTAGE: 1,200 V NON-HANDHELD  
 CURRENT: 36 A MAX.  
 TEMPERATURE: -20° C TO +80° C.
- MAXIMUM WIRE SIZES:  
 CONDUCTOR:  $\varnothing$ .090 (12AWG)  
 INSULATION:  $\varnothing$ .156 (5/32")  
 STRIP LENGTH: .25 (6.4)

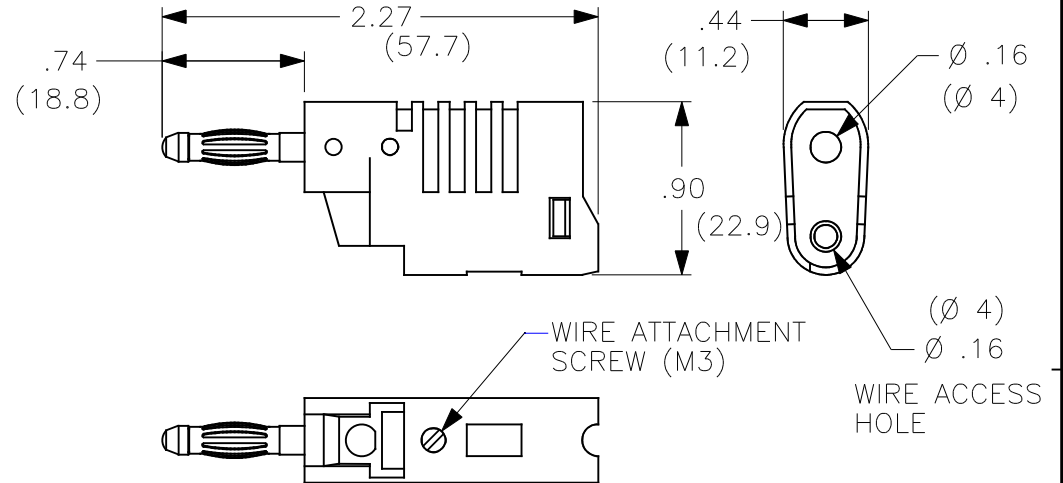

**MODEL NUMBER**

**CT2013-#**

- COLOR:
- 0 - BLACK
  - 2 - RED
  - 4 - YELLOW
  - 5 - GREEN
  - 6 - BLUE
  - 9 - WHITE

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS $\pm 1/32$ .XX $\pm .02$ .XXX $\pm .005$ DO NOT SCALE DRAWING		CONTRACT NO.		<b>Cal Test Electronics</b> 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610	
		MATERIAL		APPROVALS	DATE		
		FINISH		DRAWN	7/11/99	SIZE <b>A</b> CAGE CODE <b>43F45</b> DWG. NO. <b>P201300</b> REV. <b>A</b>	
NEXT ASSY		USED ON		CHECKED	ENGR.	SCALE 1:1	
APPLICATION				DESIGN ACTIVITY		SHEET 1 OF 1	