
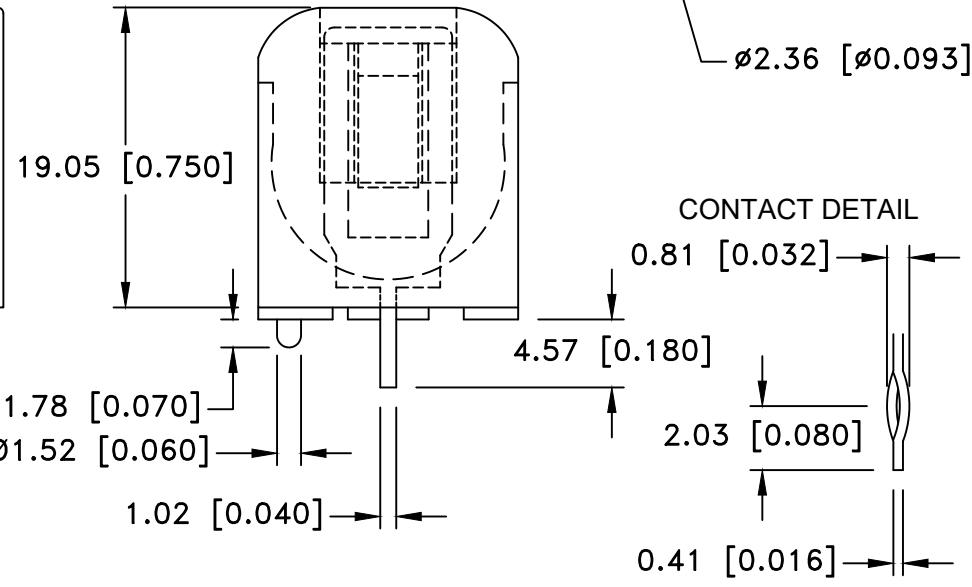
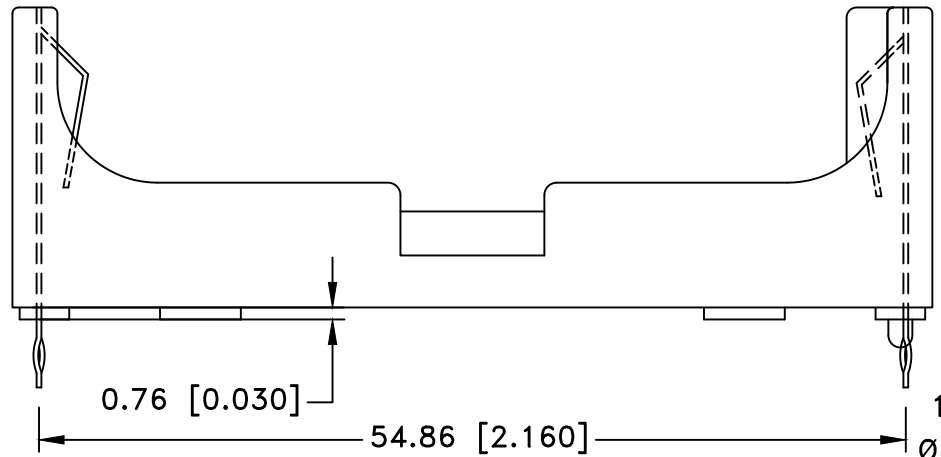
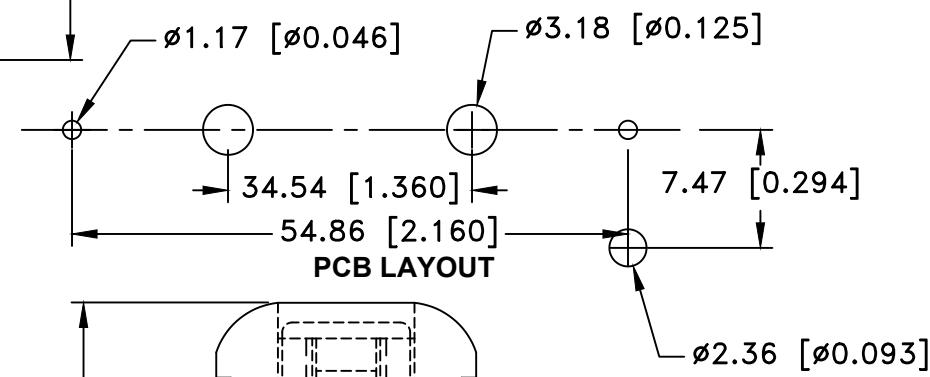



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/17/14	A	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
12/29/17	B	MILLISECONDS WAS MICRO SECONDS	T.B.	B.S.	

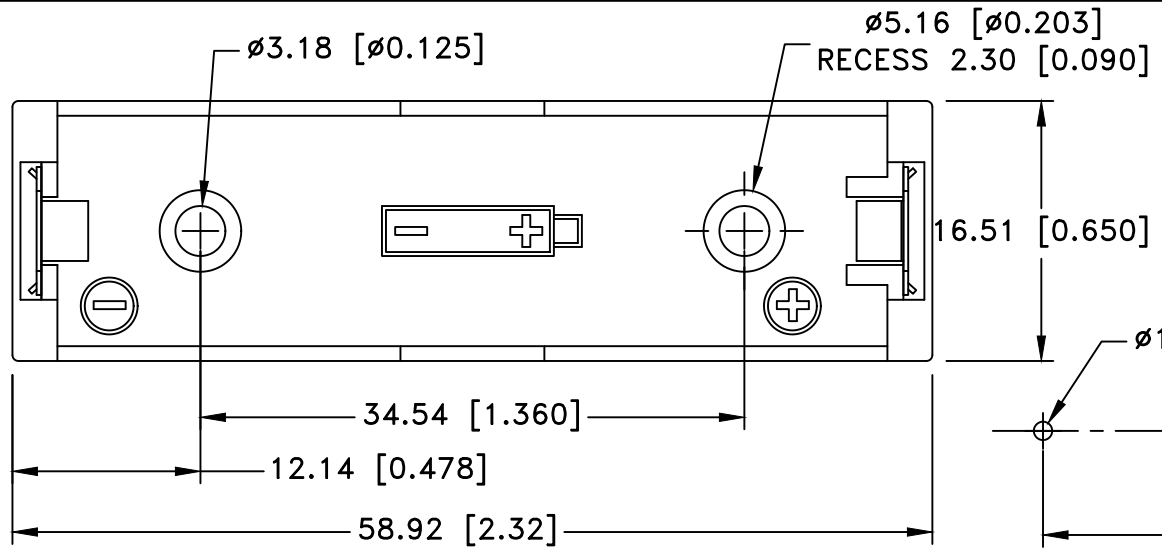

SPECIFICATIONS:

Holder Material: Black PBT, Flammability Rating: UL94V-0, FILE #E53829
 Contacts: 301 Spring temper stainless steel, nickel plated overall
 Dielectric strength: 560 Volts/mil at 25°C for 5 Sec.
 Temperature Range: -55°C to +180°C
 Vibration Test: 10-50-10 Hz swept in 60 seconds
 X,Y,Z direction: 1 hour each direction, No dislodgement of the cell or damage, No discontinuity over 10 micro-seconds
 Shock Test: Half sine wave acceleration 150g. 6 milliseconds, 1 shock pulses each direction per axis, total of 6 pulses, No evidence of physical damage
 NOTES: Eyelet Stimpson style #A1883 0.110" OD x 0.190" Flange
 Flange Recess Ø0.203" x 0.090" Deep
 Accepts Standard 2-56 Machine Screws
 Accessories: BI-UM-3-4, Insulator
 ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735			
decimal ±.5 (.020)		Scale	Drawn By B.S.	
Fractional ± .8 (.030)	Title AA HOLDER WITH REVERSE POLARITY PROTECTION			
Angular ± 3°	Date 12/29/17	Drawing Number BHAA-POL		