

# Lanolinx LNP-201AG-T

Industrial Gigabit IEEE 802.3at PoE Injector




## Features

- ▶ 10/100/1000 PoE Injector
- ▶ IEEE 802.3at compliant
- ▶ Provides up to 30 watts on PoE port
- ▶ Provide data and power over Ethernet to Power Device
- ▶ Allow Power Input 24/48 VDC
- ▶ Wide Operating Temperature
- ▶ DIN-Rail or Wall Mountable
- ▶ IP30 Protection
- ▶ 5-Year Warranty



## ▶ Specifications

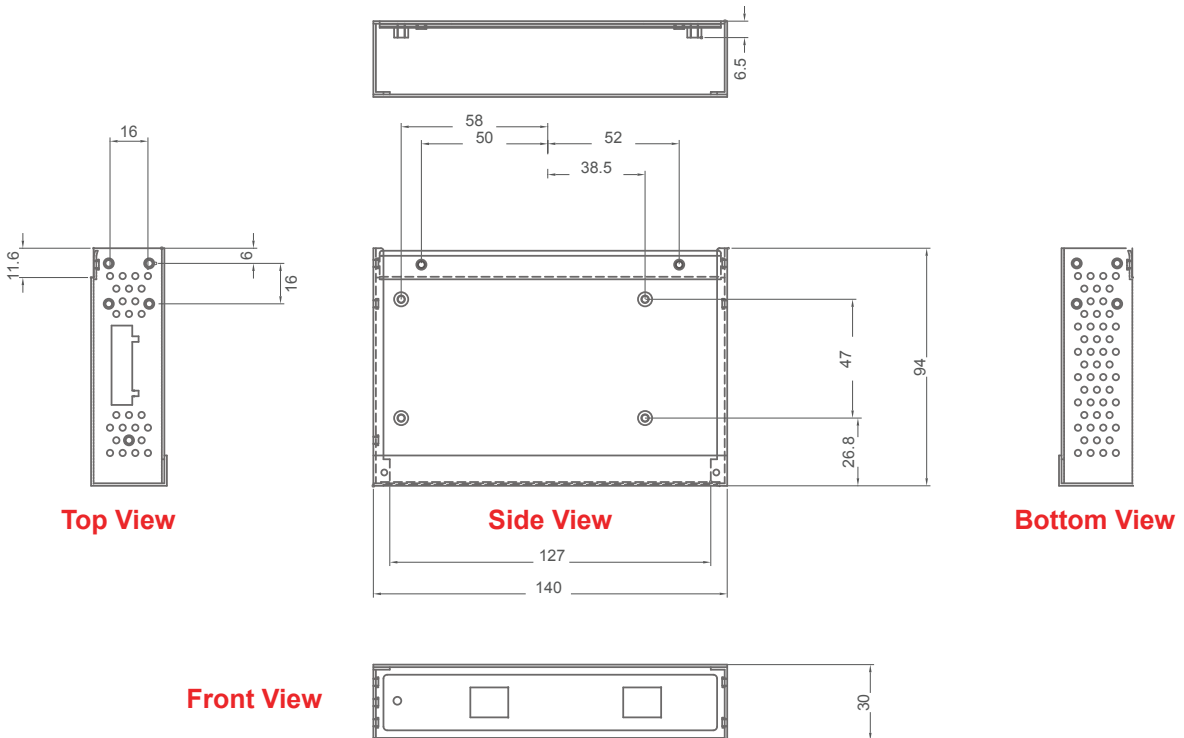

## ► Specifications

### Standard

IEEE 802.3 10BaseT  
IEEE 802.3u 100BaseT  
IEEE 802.3ab 1000BaseT(X)  
IEEE 802.3af/at Power over Ethernet

### Connector

10/100/1000BaseT(X) x 2  
(Data IN x 1, PoE OUT x 1)

### LED

Power x 2  
PoE x 1

### Power Input

24/48VDC

### Power Consumption

33.36 Watts @ 24VDC

### Overload Current Protection

Present

### Power Output Protection

Present

### Power Connector

Terminal Block x 1  
Redundant Power

### Operation Temperature

Wide Operating Temperature: -40° C to 75° C (-40° F to 167° F)

### Operation Humidity

5% to 95% (Non-condensing)

### Storage Temperature

-40° C to 85° C (-40° F to 185° F)

### Mechanical

Casing: IP30 Metal Case  
Dimension (W x H x D): 30 x 140 x 95 mm (1.18 x 5.51 x 3.74 in.)  
Installation: DIN-Rail/Wall Mountable

### EMI

CE, FCC Class A  
EN61000-6-4, EN61000-6-2, EN61000-4-2 (ESD), EN61000-4-3 (RS),  
EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS),  
EN61000-4-8 (Magnetic Field)

### Safety

UL-508

### Stability Testing

Shock: IEC60068-2-27  
Free Fall: IEC60068-2-32  
Vibration: IEC60068-2-6

### Warranty

5-Year Warranty

## ► Ordering Information

LNP-201AG-T

Industrial Gigabit IEEE 802.3at PoE Injector, Wide Operating Temperature

### Antaira Technologies

Toll-Free: (877) 229-3665  
Phone: (714) 671-9000  
FAX: (714) 671-9944

e-Mail: [info@antaira.com](mailto:info@antaira.com)  
Website: <http://www.antaira.com>

  
[www.antaira.com](http://www.antaira.com)