3-1546306-0 ACTIVE

Buchanan

TE Internal #: 3-1546306-0


Barrier Strips, Dual Barrier, Wire-to-Wire, 30 Position, 9.53 mm [.375 in] Centerline, 2 Row, Operating Voltage 300 V, 22 – 12 AWG Wire

Size

View on TE.com >



Connectors > Terminal Blocks & Strips > Barrier Strips

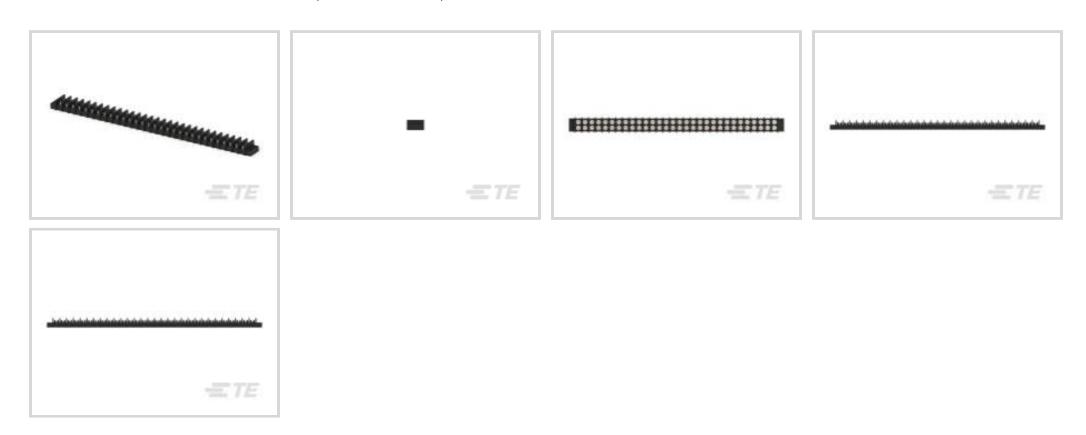

Barrier Strip Style: **Dual Barrier**Connector System: **Wire-to-Wire**

Number of Positions: 30

Centerline (Pitch): 9.53 mm [.375 in]

Number of Rows: 2

Features

Product Type Features

Product Type Features			
Block Style	Non-Feed Through		
Connector System	Wire-to-Wire		
Connector & Contact Terminates To	Wire & Cable		
Configuration Features			
Number of Levels	1		
Number of Positions	30		
Number of Rows	2		
Electrical Characteristics			
Operating Voltage	300 V		
Body Features			
Quick Connect Tab Plating Material	Tin		
Primary Product Color	Black		
Product Orientation	Vertical		

Dual Barrier

Barrier Strip Style



Contact Features

Contact Base Material	Brass
Contact Current Rating (Max)	20 A
Mechanical Attachment	
Screw Plating Material	Nickel
Screw Material	Steel
Mounting Options	End Mounting Ears
Thread Size	6-32
Connector Mounting Type	Panel Mount
Housing Features	
Housing Material	Thermoplastic
Centerline (Pitch)	9.53 mm[.375 in]
Dimensions	
Product Length	302 mm[11.89 in]
Wire Size	$.3 - 3 \text{ mm}^2$
Usage Conditions	
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	30
Packaging Method	Carton
Other	

Product Compliance

Terminal Blocks & Strips Comment

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	

Other options available upon request,

consult our Product Information Center.



EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Customers Also Bought





















Documents

Product Drawings

30P.374" DR BARRIER STRIP

English

CAD Files

Customer View Model

ENG_CVM_CVM_3-1546306-0_K1.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_3-1546306-0_K1.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-1546306-0_K1.3d_igs.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

1-1773458-2_BARRIER_STRIPS_QUICK_REFERENCE_GUIDE

English