

Directive 2002/95/EC
"RoHS"
Compliant


NOTES:

1. RoHS COMPLIANT
2. SUITABLE FOR WAVESOLDERING
3. METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
4. INSULATORS: HIGH TEMPERATURE PLASTIC UL 94 V-0, BLACK
5. CONTACTS: COPPER ALLOY
PLATING: 8µm HARD GOLD over min. 50µm NICKEL
CONTACT TAILS PRETINNED
6. METAL BRACKET: ZINC DIE CAST; 300µm COPPER/40-120µm NICKEL/120-200µm TIN
7. THREADED INSERT: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
8. CAPACITANCE: 2 x 370pF ± 20%
9. DIELECTRIC WITHSTANDING VOLTAGE: 300 VDC
10. P.C.B. HOLE DRILLINGS ON SHEET 2
11. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
12. CONNECTOR IS PART MARKED: 241A26090X CONEC ABC

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

finish: SEE NOTES				tolerance		dim. in mm
date				name		
drawn				12.02.07	Lehmenkühler	
appd.				13.02.07	Mickenbecker	
norm				DIN 41652		
d-old						
a Origin				CONEC		
rev.	description	date	name			

scale: 2:1 (5:1)	
material: SEE NOTES	
title: D-SUB π Filter Male 90° 15pos. 0,590inch threaded insert and metal bracket	
dwg no: Inventor 10	DIN-A3
24K1A974	
sh: 1	
part no: 241A26090X	

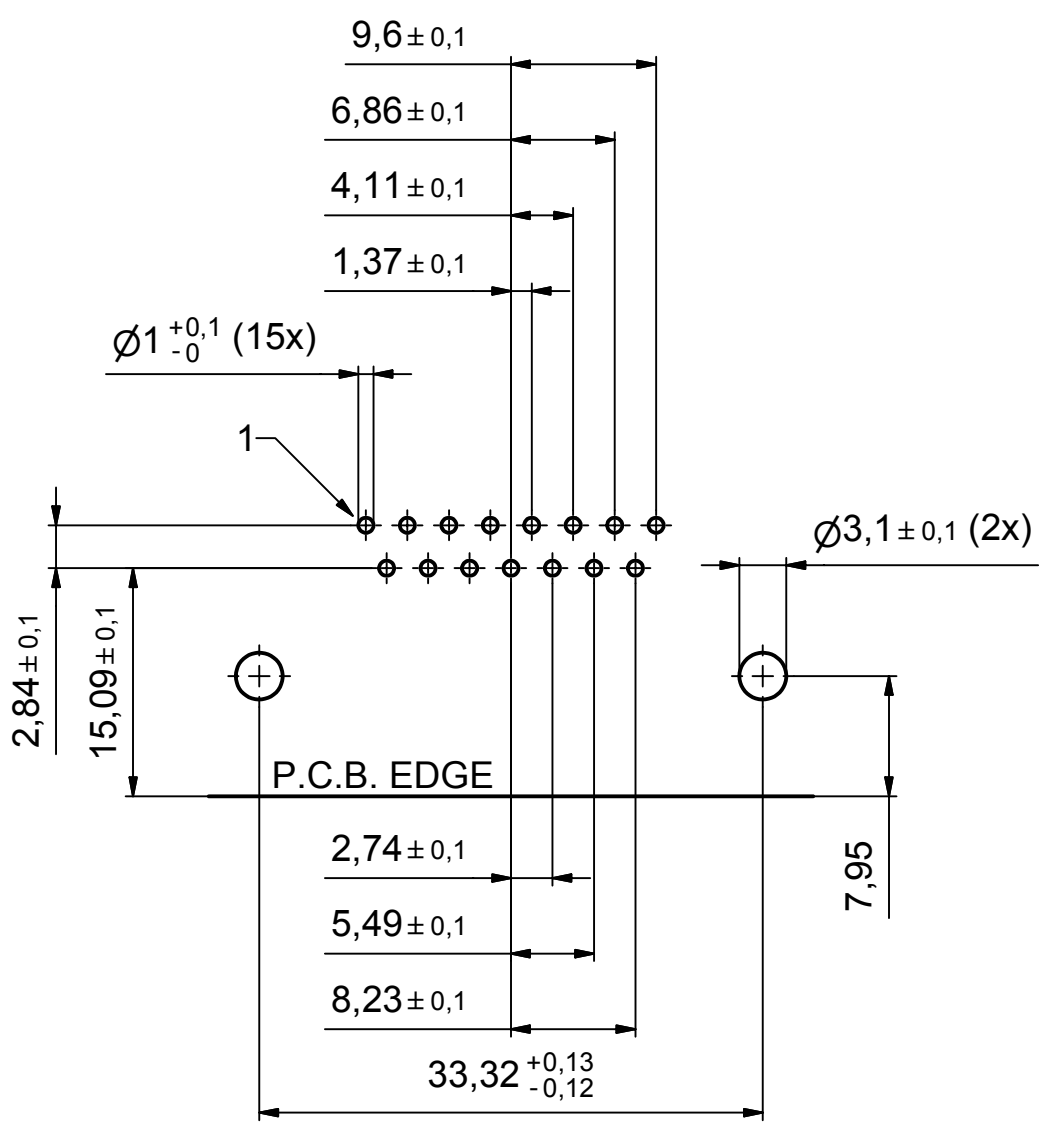

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
 OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

finish: SEE SHEET 1				tolerance		 dim. in mm		scale: 2:1	
rev.	description	date	name	drawn	date	name		material: SEE SHEET 1	
a	Origin			12.02.07	13.02.07	Lehmenkühler		title: P.C.B. HOLE DRILLINGS D-SUB π Filter Male 90° 15pos., 0,590inch threaded insert and metal bracket	
				appd.		Mickenbecker			
				norm	DIN 41652				
				d-old			dwg no: Inventor 10		DIN-A4
						24K1A974		sh: 2	
						part no: SEE SHEET 1			

--	--

title: P.C.B. HOLE DRILLINGS D-SUB π Filter Male 90° 15pos., 0,590inch threaded insert and metal bracket	
dwg no: Inventor 10	DIN-A4
24K1A974	
sh: 2	
part no: SEE SHEET 1	