

Ratings

Voltage: 600 V
 Temperature: -40~105 °C
 Flammability: FT2

Conductor

Conductor count: 7
 Gauge: 18 AWG 0.82 mm²
 Material: tinned copper strands
 Strand size: $\phi 0.16 \times 41$
 Resistance at 20 °C: 23.2 Ω /km max

Insulator

Material: mPPE
 Color: red, black, white, yellow, blue, green, orange
 Diameter: $\phi 1.8 \pm 0.10$ mm
 Average thickness: 0.29 mm
 Resistance at 20 °C: 100 M Ω /km min

Wrap

Material: cotton paper



Outer jacket

Material: mPPE, 85A
 Color: black
 Diameter: $\phi 7.2 \pm 0.25$ mm
 Average thickness: 0.85 mm

Wire marking: E339579 UL AWM STYLE 21509 18 AWG 105°C
 600V --- cUL AWM I A 105°C 600V FT2 TENSILITY

Bend radius

Minimum: 6 times diameter (43.2 mm)

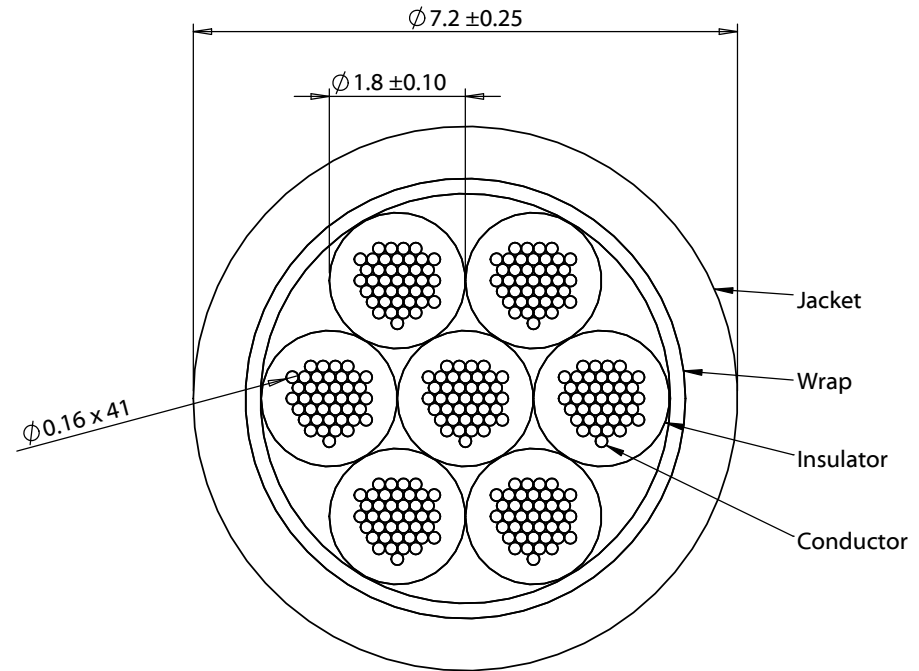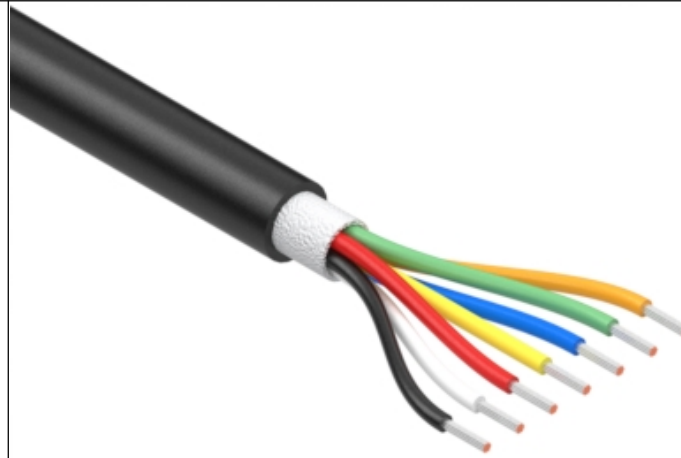

Revision:	Date:	Description:	Prepared: AW <small>Digitally signed by AW Date: 2021.05.06 12:55:59 -07'00'</small>	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	5/4/2021	Initial release	Verified: JC <small>Digitally signed by JC Date: 2021.05.11 14:42:49 -07'00'</small>	RoHS compliant Phthalate and halogen free	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Wire, 7C TS, 18 AWG, 21509, 600V, 105C, 7.2 mm, FT2, mPPE	Size: A Part number: 30-02014
					Scale: 10:1 Sheet 1 of 1

5

4

3

2

1