


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00261	Connector, dc plug, 5.5x2.1xL20.5mm, brass nickel plated	2	
2	30-00690	Wire, 2C TS, 22 AWG, UL2464, 300V, 80C, 4.30 mm, VW-1, PVC, white	1	
3	24-00161	Overmold, dc plug, twistlock, PVC	2	white

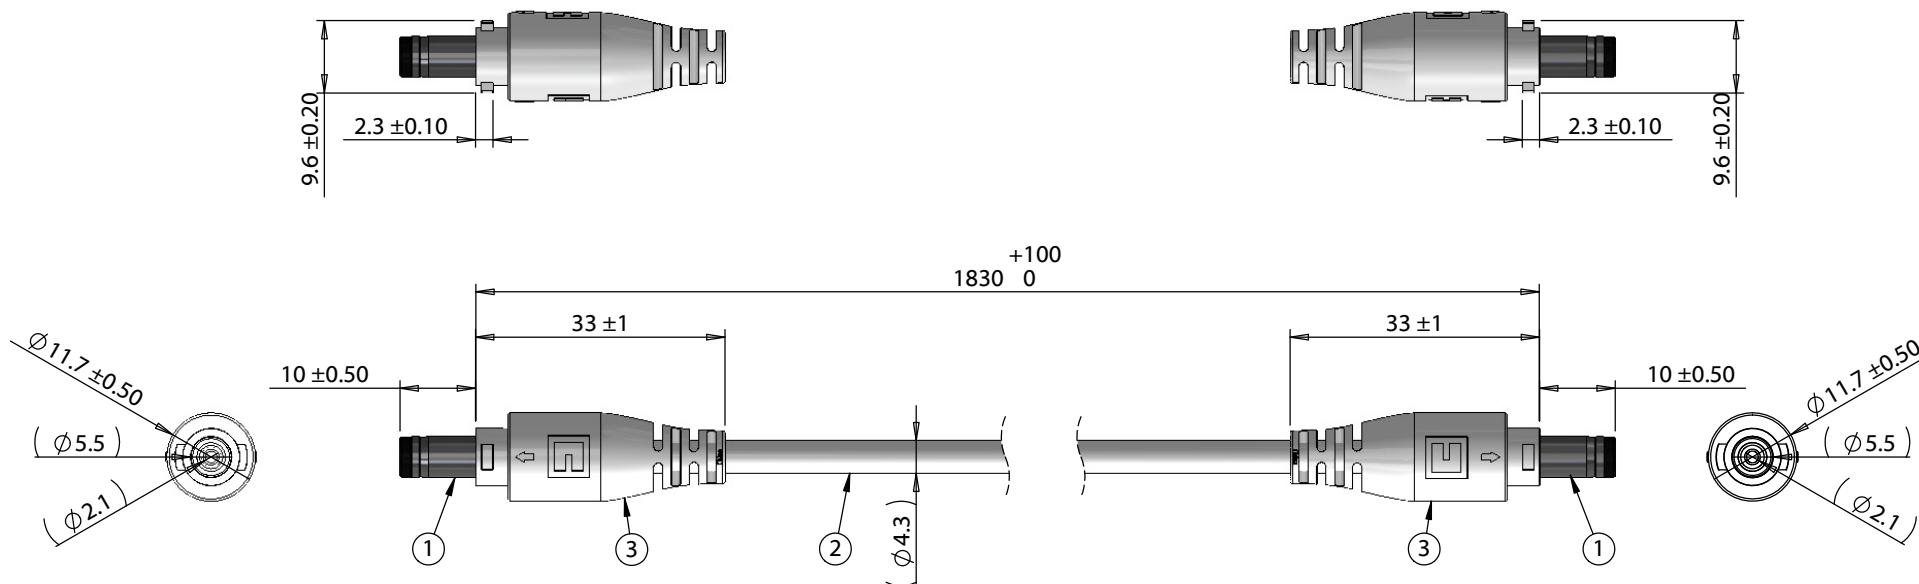

Notes:
Plugs mate with cable assembly: 10-02935 & 10-02979
Functionally equivalent components may be substituted

Wiring Diagram		
50-00261	wire color	50-00261
center	red	center
sleeve	black	sleeve

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1>
A	11/7/2019	Initial release	AW <small>Digitally signed by AW Date: 2019.11.07 16:15:22 -08'00'</small>		
			Verified:	Function test: no open, no short circuit, no intermittent	tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 5.5x2.1 mm 50-00261 dc plug twist lock to same, 22 AWG, white	Size: Part number: A 10-03624
					Scale: 1:1 Sheet 1 of 1

5

4

3

2

1