


PACKAGE: INDIVIDUAL PE BAG.

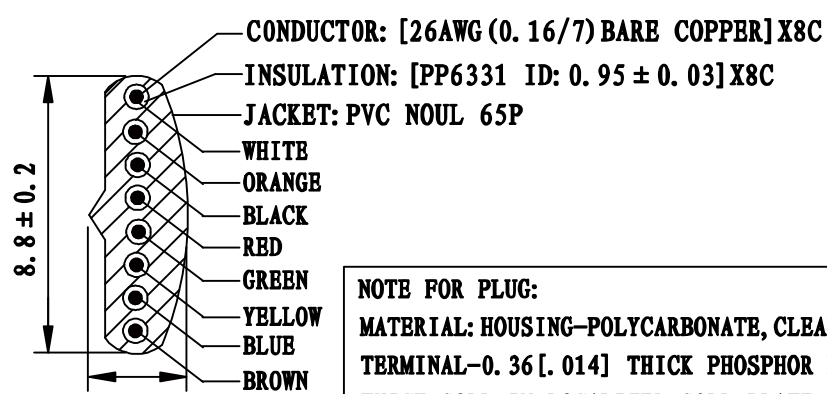


CONDUCTOR: [26AWG (0.16/7) BARE COPPER] X8C
 INSULATION: [PP6331 ID: 0.95 ± 0.03] X8C
 JACKET: PVC NOUL 65P

NOTE FOR PLUG:
 MATERIAL: HOUSING-POLYCARBONATE, CLEAR.
 TERMINAL-0.36 [.014] THICK PHOSPHOR BRONZE,
 THICK GOLD IN LOCALIZED GOLD PLATE.
 AREA, GOLD FLASH OVER THE REMAINDER.
 OVER 2.54um [.000100] THICK NICKEL
 UNDERPLATE.


P1	P2
1 <u>WHITE</u>	8
2 <u>ORANGE</u>	7
3 <u>BLACK</u>	6
4 <u>RED</u>	5
5 <u>GREEN</u>	4
6 <u>YELLOW</u>	3
7 <u>BLUE</u>	2
8 <u>BROWN</u>	1

NO	ITEM	DESCRIPTION	Q' TY
①	CABLE		1 PCS
②	PLUG	8P8C 50U"	2 PCS
③	CABLE TIE		1 PCS
④			



A, B, C, D. Folding

PART NO	DRAWING NO	WIRE LENGTH "L"	BUYER COLOR	VENDOR COLOR	CUT LENGTH
510-26-8800-WH-0005F	A	1525 ± 20 (5FT)	White	W-103 LIGHT	1525-1535MM
510-26-8800-WH-0007F	B	2135 ± 30 (7FT)	White	W-103 LIGHT	2135-2145MM
510-26-8800-WH-0010F	C	3050 ± 60 (10FT)	White	W-103 LIGHT	3050-3060MM
510-26-8800-WH-0012F	D	3660 ± 60 (12FT)	White	W-103 LIGHT	3660-3670MM
510-26-8800-WH-0014F	E	4270 ± 60 (14FT)	White	W-103 LIGHT	4270-4280MM
510-26-8800-WH-0025F	F	7625 ± 100 (25FT)	White	W-103 LIGHT	7625-7635MM
510-26-8800-WH-0050F	G	15250 ± 150 (50FT)	White	W-103 LIGHT	15250-15260



F, G Folding

REVISE	VERSION	BASIS	CONTENTS
12-02-20	A/0	T0210A	NEW DRAWING

CnC Tech, LLC			
Industrial Cable and Connector Technology			
DRAWING NO: 671-315	CUSTOMER: L-671		
ITEM NO: 8C CABLE P+P PLUG	UNIT: mm		
DATE: 2012-02-20	ISSUE: (A/0)		
DRAWN: QE:	QA:		
SALES DEPT:	SALES MANAGER:		