
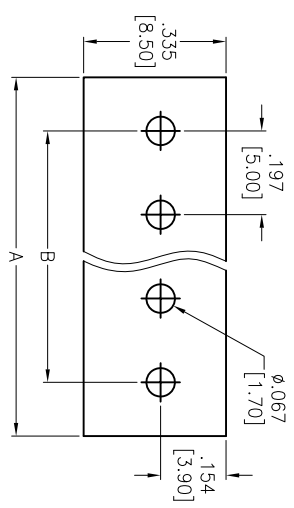
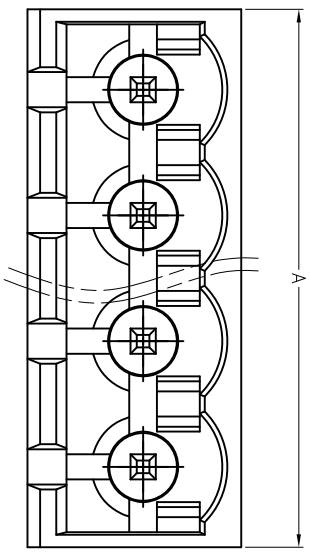
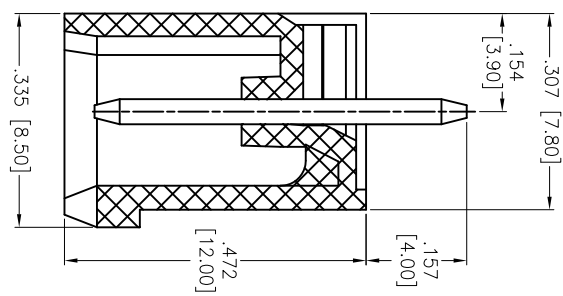


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/24/14	

APPROVED: _____
 DATE: _____ TITLE: _____

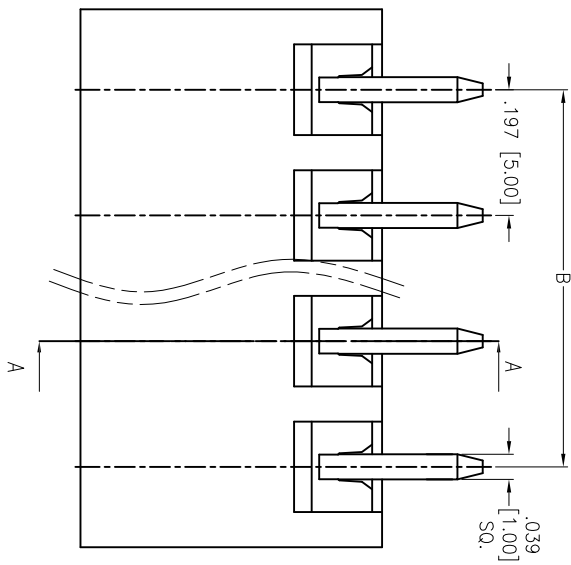

Positions: 02 thru 24
 A = .197 [5.00] x No. of Positions + .055 [1.40]
 B = .197 [5.00] x No. of Spaces

SPECIFICATIONS:
 Material: Insulator: PA66, rated UL 94V-0
 Insulator color: Green
 Contact: Brass, Tin plated.
 Electrical:
 Operation voltage: 300 VAC max
 Current rating: 15 Amps
 Contact resistance: 20 mohms max
 Insulation resistance: 500 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 2,000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED
 INCHES Holes
 .X ± .10 ØX ± .10
 .XX ± .020 ØXX ± .015
 .XXX ± .015 ØXXX ± .010



APPROVALS		DATE
DRAWN	HR	11/24/14
CHECKED	NP	11/24/14
APPROVED		

TITLE		TERMINAL BLOCK SOCKETS .197 [5.00] PITCH VERTICAL, CLOSE TYPE	
DRAWN		HR	
CHECKED		NP	
APPROVED			
REV.	REV.	SCALE: NTS	SHEET 1 OF 1

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710