ADSL TRANSFORMER FOR USE WITH CENTILLIUM CT-L53SC08 ANNEX A AND CT-L76SC08 ANNEX C IC CHIP SET

- A. Electrical Specifications (@ 25°C);
 - 1. Primary Open circuit Inductance; $850\mu\text{H}$ $\pm 10\%$ @ 10KHz, 0.1Vrms Measured (1-4) with 2 and 3 shorted
 - 2. Leakage Inductance; $5\mu H$ MAX @ 100KHz, 0.1Vrms Measured (1-4) with 2 and 3, 8 and 6, 7 and 5 shorted
 - 3. Turns Ratio; $(1-4):(8-5)=1:1 \pm 2\%$
 - 4. DC Resistance; 1.1Ω MAX measured (1-3) 1.1Ω MAX measured (2-4) 1.0Ω MAX measured (8-6) 1.25Ω MAX measured (7-5)
 - 5. Dielectric Strength; 1875Vrms 1 second @ Pri to Sec
- B. Marking; TTC-4087, TAMURA, date code and country of origin
- C. Safety; Complies with UL1950 3rd Edition and EN60950
- D. Schematic and Mounting Footprint;



Date Code -

Country of

origin

PARILES .


`*0₆>


8

White dot indicates

pin 1

D. Mechanical Specifications; Dimensions without tolerances are for reference only.

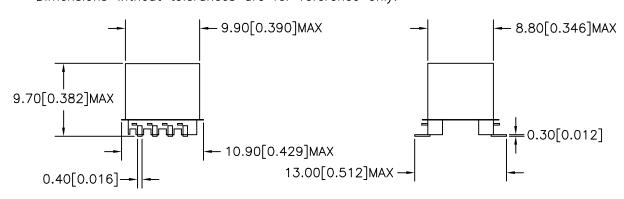



PREPARED BY:

D.	Rund	
	<u> </u>	١

ENGINEER:

Y. Sekiquchi QUALITY CONTROL:

D. Kelley APPROVED:

P-A1-12821 acad\ttc\a1128211.dwg	PR1
CONTENTS OF THIS DRAWIN SUBJECT TO CHANGE WI PRIOR NOTICE	IG ARE THOUT

DWG CONTROL NO. REV

ADSL TRANSFORMER

TAMURA CORPORATION OF AMERICA 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624 (909) 699-1270 FAX 9096769482 TTC-4087

MODEL SPECIFICATION

DIM: mm(In) SCL: 2/1 SH: 1 0F

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING. J. Coleman