


13	12	11	10	9	8	7	6	5	4	3	2	1
MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH										
1300240232	DND90A-M010	3.28' +3.50" -0 [1.0M +88.9mm -0]										

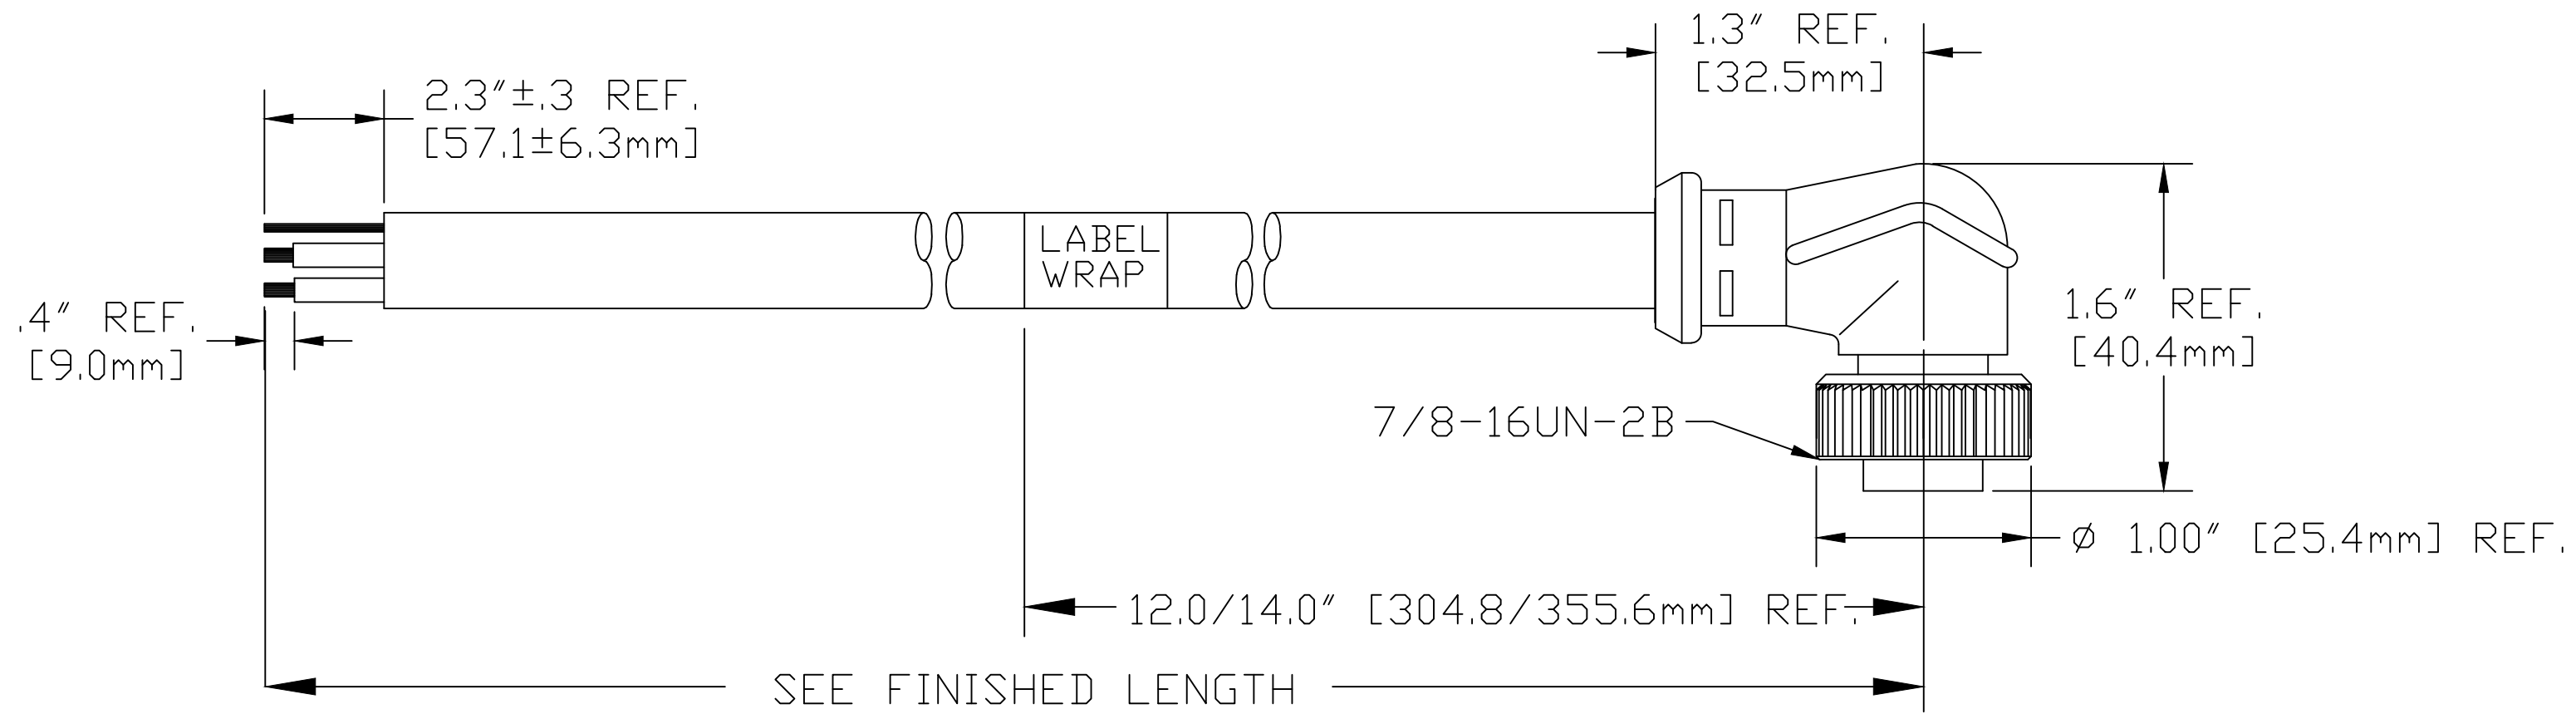

DND90A-M010


Cable type
DEVICENET

cable length
M010----1 Meter
M100----10 Meter

1	DRAIN
2	RED
3	BLACK
4	WHITE
5	BLUE

WIRING DIAGRAM

FEMALE INSERT
FRONT VIEW

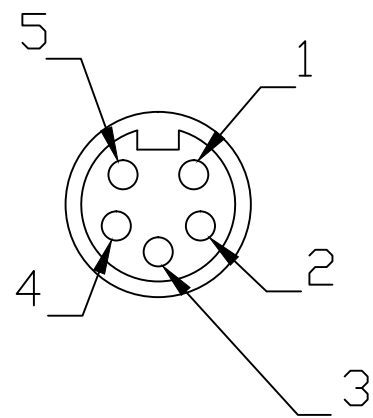

CONTACT:	GOLD/NICKEL OVER COPPER ALLOY
INSERT:	PVC, GRAY
COUPLING NUT:	ZINC DIE CAST, BLACK E-COATED
MOLDED BODY:	PVC, GRAY
VOLTAGE RATING:	300 VAC/VDC
AMPERAGE RATING:	4 AMPS
PROTECTION:	IP67
OPERATING TEMPERATURE:	-20°C TO 80°C
CERTIFICATIONS:	UL RECOGNIZED FILE NO. E152210 CSA CERTIFIED FILE NO. LR6837

INITIAL RELEASE EC NO: IFC2014-0457 DRWN: GGUSTAFS 2013/08/28 CH'KD: BARDEN APPR: BWOODMAN2013/10/07	REV A	DESCRIPTION ! APPR: BWOODMAN2013/10/07	QUALITY SYMBOL ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
						IN/MM		NTS	INCH		
					mm	INCH	DRAWN BY	DATE	TITLE		
				4 PLACES	±---	±---	EBRACKEN	2013/06/18	MINI-CHANGE DEVICENET 5 POLE 90D FEMALE 22/4 DROP CABLE GRAY PVC		
3 PLACES	±---	±.005	CHECKED BY	DATE							
2 PLACES	±0.13	±.010	BARDEN	2013/09/12	MOLEX INCORPORATED						
1 PLACE	±0.25	±.020	APPROVED BY	DATE							
ANGULAR ±.5°				BWOODMAN	2013/10/07	DOCUMENT NO.		SHEET NO.			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				MATERIAL NO.		SD-130024-019		1 OF 1			
				SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
				C							