

Ratings

Voltage: 600 V
 Temperature: -40~105 °C
 Flammability: VW-1

Conductor

Conductor count: 1
 Gauge: 28 AWG 0.09 mm²
 Material: tinned copper strands
 Strand size: \varnothing 0.127 mm x 7
 Resistance at 20 °C: 250 Ω /km max


Insulator

Material: Polyphenylene Ether, Modified (mPPE)
 Color: red
 Diameter: \varnothing 0.9 \pm 0.08 mm
 Nominal thickness: 0.25 mm
 Resistance at 20 °C: 100 M Ω /km min

Wire marking: E339579 UL AWM STYLE 11028 28 AWG 105°C
 600V VW-1 --- cUL AWM I A/B 105°C 600V FT1 TENSILITY

Bend radius

Minimum: 4 times diameter (3.6 mm)

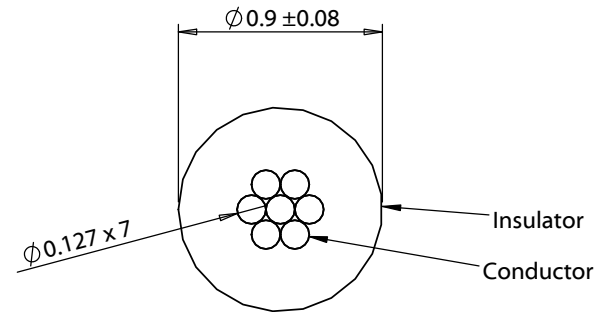

| | | | | | | |
|-----------|----------|-----------------|---|--|--------------------------------------|----------------|
| Revision: | Date: | Description: | Prepared: | Notes: | TENSILITY | |
| A | 3/2/2021 | Initial release | AG <small>Digitally signed by AG Date: 2021.09.23 09:44:03 -07'00'</small> | | | RoHS compliant |
| | | | Verified: | Phthalate and halogen free | tel 1.541.323.3228 800 877.670.7118 | |
| | | | JD <small>Digitally signed by JD Date: 2021.09.23 11:23:59 -07'00'</small> | | fax 1.541.323.4202 web tensility.com | |
| | | | Dimensions are in millimeters. | Description: Wire, hook-up, TS, 28 AWG, UL 11028, 600V, 105C, 0.9 mm, mPPE, red | Size: | Part number: |
| | | | Tolerances: | | A | 30-01782 |
| | | | X: \pm 0.5 mm X.X: \pm 0.3 mm X.XX: \pm 0.05 mm | | Scale: 30:1 | Sheet 1 of 1 |

5

4

3

2

1