


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/26/10	A.D.M.

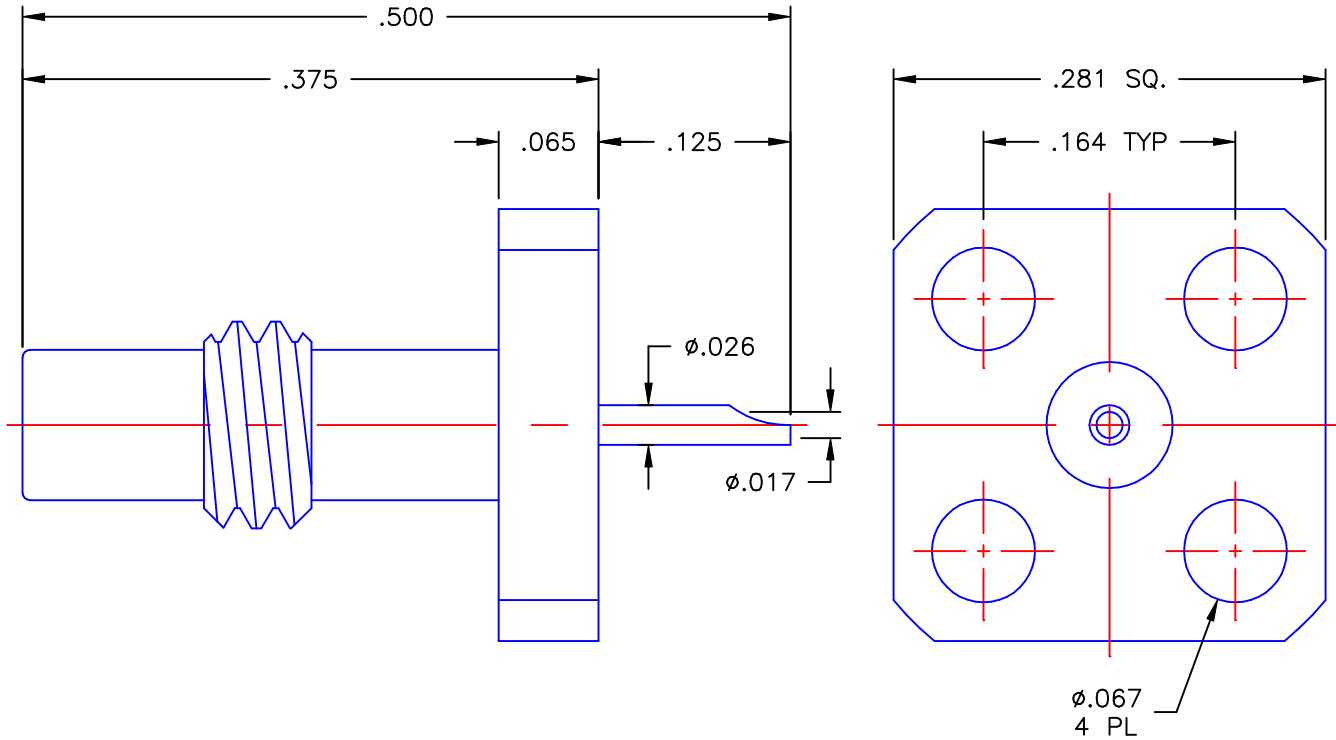


NOTES:

MATERIALS:

1. BODY = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".
2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.

FINISHES:

1. BODY = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .000050 TO .00010 STRESS FREE NICKEL PER QQ-N-290.
2. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN: A.D.M.	DATE: 10/26/10	 Property of Radial This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.
DECIMAL	ANGLE	CHKD: D.N.	DATE: 10/26/10	
		APVD: J.M.	DATE: 10/26/10	
REFERENCE:		MATERIALS & FINISHES: SEE NOTES		SSMC STRAIGHT MALE JACK 4 HOLE FLANGE MOUNT SOLDER POT RECEPTACLE
ORIGINATOR: A.D.M. DATE: 10/26/10		SIZE: A	FSCM NO.: 19505	DWG NO.: 7198-1513-000 REV: A
		SCALE: 8:1	THIRD ANGLE PROJECTION	SHEET 1 OF 1

7198-1513-000