

Ratings

Voltage: 300 V
 Temperature: -25 to 80 °C
 Flammability: VW-1

Conductor

Conductor count: 7
 Gauge: 22 AWG 0.34 mm²
 Material: tinned copper strands
 Strand size: $\varnothing 0.16$ mm x 17
 Resistance at 20 °C: 59.4 Ω /km max

Insulator

Material: PVC
 Color: red, black, white, yellow, blue, green, orange
 Diameter: $\varnothing 1.35 \pm 0.10$ mm
 Nominal thickness: 0.28 mm
 Resistance at 20 °C: 10 M Ω /km min



Outer jacket

Material: PVC
 Color: black
 Diameter: $\varnothing 6.1 \pm 0.30$ mm
 Nominal thickness: 1.0 mm

Wire marking: E339579 UL AWM STYLE 2464 22 AWG 80°C
 300V VW-1 --- cUL AWM I/II A 80°C 300V FT1 TENSILITY

Tests

Insulation tensile strength: 2.11 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 113 ± 2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 ± 1 °C /1 hour, no observed degradation
 Deformation: 121 ± 1 °C /1 hour, ≤ 50 %
 Cold bend: -10 ± 2 °C /1 hour, no observed cracking

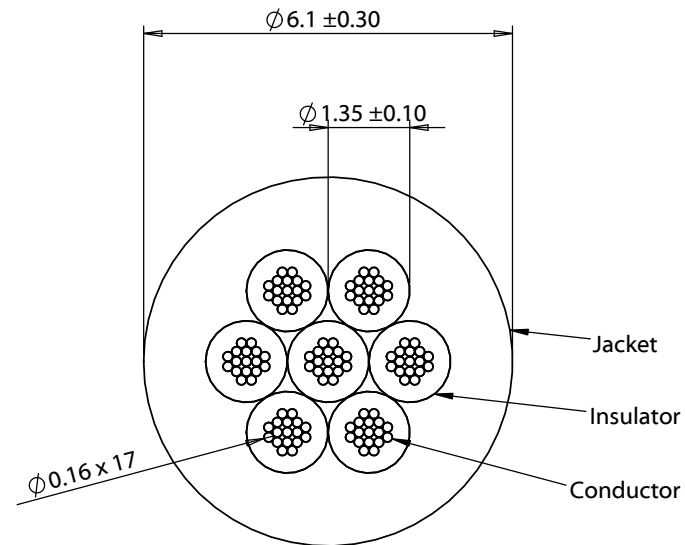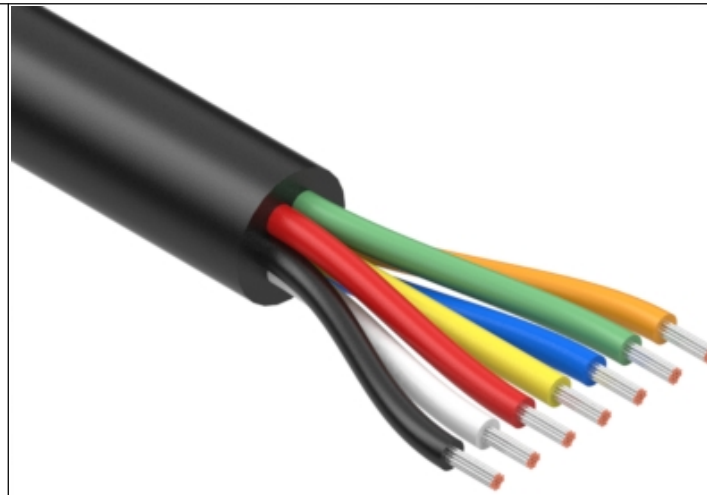

| | | | | | |
|-----------|-----------|-----------------|--|---|---|
| Revision: | Date: | Description: | Prepared: AW <small>Digitally signed by AW Date: 2019.05.16 09:06:45 -07'00'</small> | Notes: | TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com |
| A | 5/16/2019 | Initial release | Verified: JP <small>Digitally signed by JP Date: 2019.05.17 11:38:47 -07'00'</small> | RoHS compliant Function test: no open, no short circuit, no intermittent | |
| | | | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: | Size: Part number: |
| | | | | Wire, 7C TS, 22 AWG, UL2464, 300V, 80C, 6.1 mm, VW-1, PVC, 60P | A 30-01304 |
| | | | | Scale: 8:1 | Sheet 1 of 1 |

5

4

3

2

1