



## VRLA Rechargeable Battery

# BPL28-12



### FEATURES

- Maintenance free(no water topping-up required).
- No free acid(Non-spillable battery).
- Low self-discharge rate, lower than 3% capacity loss per month.
- Can be used in any orientation(excluding used inverted).
- Absorbent Glass Mat technology for efficient gas recombination.

### APPLICATION

- UPS
- Wheelchairs
- Lawn Mowers
- Electronic Medical Equipment
- Golf-Carts



### SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	28.0Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	9.7Kg(21.39lbs.)
Terminals	B1 (Fitting M5 bolt & nut) , T2 and I1 are optional
Internal Resistance	≤10m Ω (Fully Charged )
Max. Discharge Current	420 A (5 sec.)
Max. Charge Current	8.4 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F)
Container Material	Standard: ABS( UL 94-HB) BPL28-12 Optional: Flame Retardant ABS(UL 94-V0) BPL28-12FR





- IEC 61056-1
- JIS C 8702-1
- GB/T 19639.1

### DIMENSION(mm/inch)

### OUTER DIMENSIONS

### TERMINAL TYPE

- **Length**  
175±1.5 (6.89±0.06)
- **Width**  
166±1.5 (6.54±0.06)
- **Container Height**  
125±1.5 (4.92±0.06)
- **Total Height**  
125±1.5 (4.92±0.06)

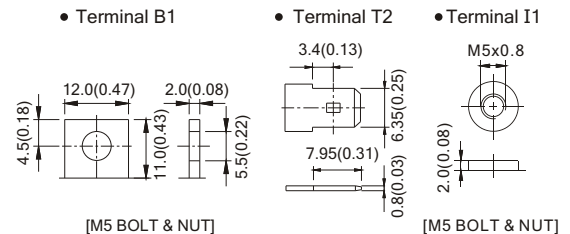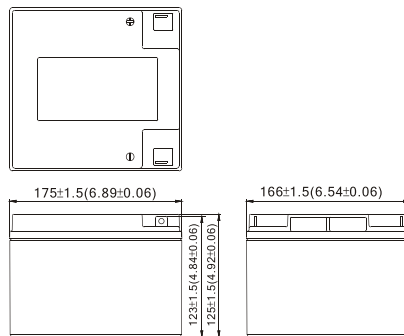

Terminal Hardware Initial Torque: B1(2.5Nm±5%),I1(4.0Nm±5%)

### Constant power discharge characteristics at 25 °C/77 °F

Unit: W

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	912.0	685.6	555.2	334.0	193.6	81.6	56.4	31.44	16.44
1.75V	1056.0	742.8	581.2	346.8	199.2	83.2	57.2	31.92	16.80
1.70V	1120.0	769.6	598.8	354.4	202.8	84.0	57.6	32.08	16.88
1.65V	1172.0	788.0	612.8	359.6	205.6	84.8	58.0	32.16	16.92
1.60V	1208.0	803.6	624.8	363.2	207.6	85.2	58.0	32.16	16.92

### Constant current discharge characteristics at 25 °C/77 °F

Unit: A

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	82.2	60.4	48.3	28.3	16.3	6.80	4.70	2.62	1.37
1.75V	96.9	65.4	50.5	29.4	16.7	6.93	4.77	2.66	1.40
1.70V	102.8	67.7	52.1	30.0	17.0	7.00	4.80	2.67	1.41
1.65V	107.5	69.4	53.3	30.5	17.3	7.07	4.83	2.68	1.41
1.60V	110.8	70.7	54.3	30.8	17.4	7.10	4.83	2.68	1.41

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.