


# Data sheet

## RP023xxHBWC Type 166

### Illustrations



### Dimensional drawing

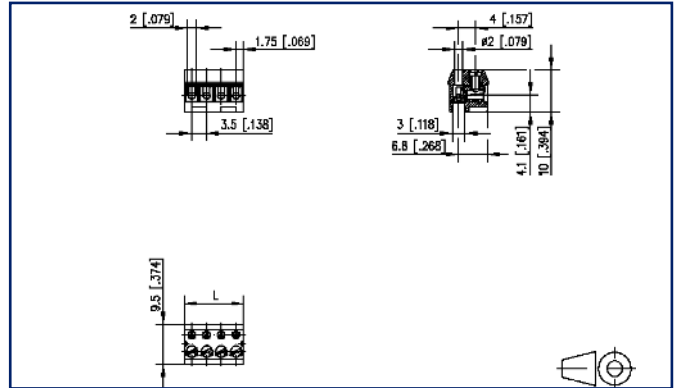

See enlarged drawings at the end of document

### Product specification

- screw type terminal block, pluggable
- centerline 3.50 mm, direction of connection 90°
- wire protector, fittable without loss of poles
- color black
- Wire entry perpendicular to plug direction



**Technical Data**

**General Data**


Tightening torque SEV	0.15 Nm		
Tightening torque UL	1.3 lb-in		
min. number of poles	2		
max. number of poles	24		
Insulating material class	CTI 600		
clearance/creepage dist.	2 mm		
Protection category	IP00		
Min. insul. strip length	5 mm		
Rated current	6 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	32 V	250 V	250 V
Rated test voltage	1.5 kV	1.5 kV	1.5 kV

**Terminal data**

rat.wiring solid AWGmax	0.08 mm <sup>2</sup> - 1.5 mm <sup>2</sup> / AWG 28 - AWG 16		
rat.wiring strand.AWGmax	0.08 mm <sup>2</sup> - 1.5 mm <sup>2</sup> / AWG 28 - AWG 16		

**Approvals**

 V / A / AWG	125 / 8 / 28 - 16		
approval UL - File No.	E121004		

 1 mm <sup>2</sup>	200 V / 2.5 kV / 6 A		
---	----------------------	--	--

**Material**

insulating material	PA66
flammability class	V0
contact material	CuNiZn
terminal body thread	M2
terminal body material	CuZnPb
terminal body surface	Ni
screw thread	M2
screw material	8,8
screw surface	Zn Cr(VI)-frei/free

**Data sheet**  
**RP023xxHBWC Type 166**

Page 3/6

P/N  
**311661xx****xx=number of poles**

2023/06/26

Version: AA

**Technical Data**

wire protector material	CuNiZn
Glow-Wire Flammability GWFI	850 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13

**Climatic Data**

upper limit temperature	105 °C
lower limit temperature	-40 °C

**general**

Tolerance	ISO 2768 -mH
-----------	--------------

## Accessories


P/N	Designation
720158-01-0	Befestigungsflansch kurz LP1mm für Typ 165, 166 F_Befest_165_brg_kurz 1mm
720158-01-2	720158
720158-02-2	Mounting flange for type 166
720159-01-0	Kodierstift kurz für Typ 165, 166 F_Kodier_Typ165_brg_kurz
720159-01-2	Coding pin short for type 166
720159-02-0	Kodierstift lang für Typ 165, 166 F_Kodier_Typ165_brg_lang
720159-02-2	Coding pin long for type 166

## Counterpart

P/N	Designation
312241	PR033xxVBHC Type 224
312251	PT153xxHBEC Typ 225
312261	PT153xxVBEC Type 226
313331	PT023xxHBHC
314241	PM013xxVBHC Type 424

**Illustrations**

Dimensional drawing

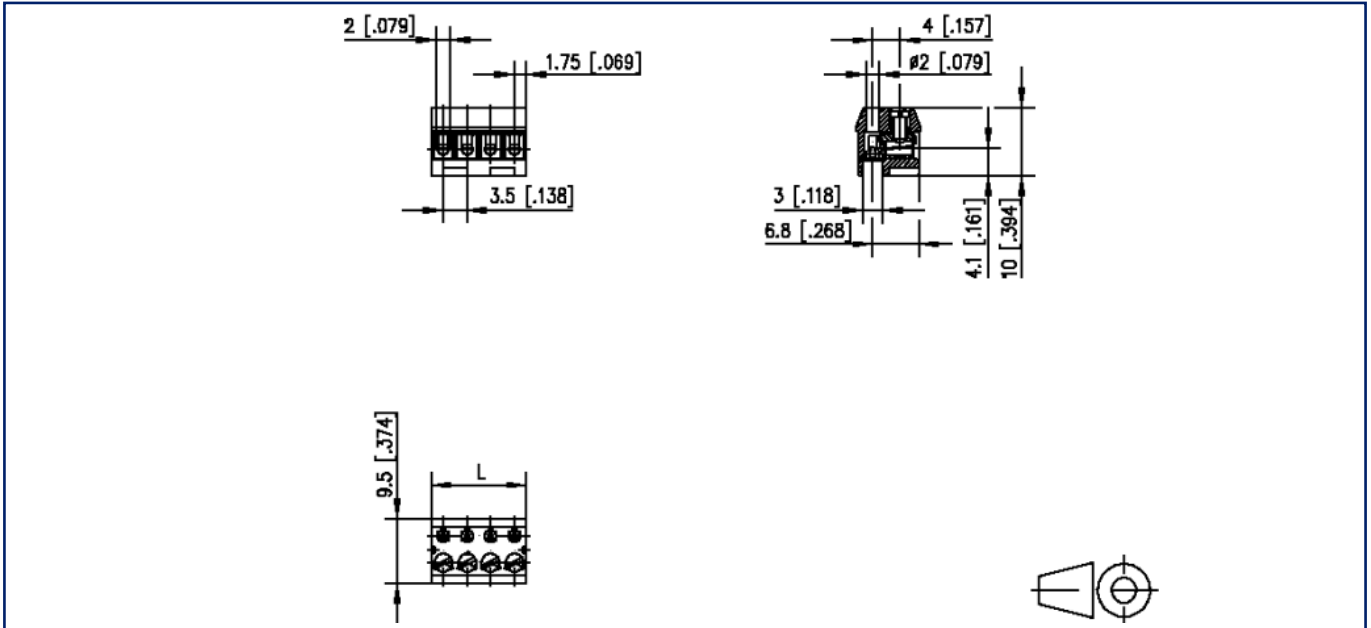

$L = (\text{pole size} - 1) \times \text{centerline} + 3.5 \text{ mm } [0.138]$