

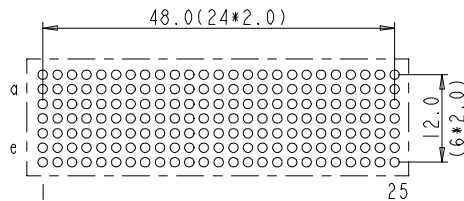



Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriete de c FCI. Droits de reproduction FCI.

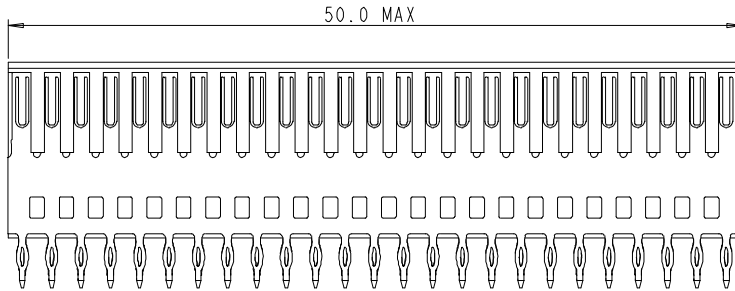

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

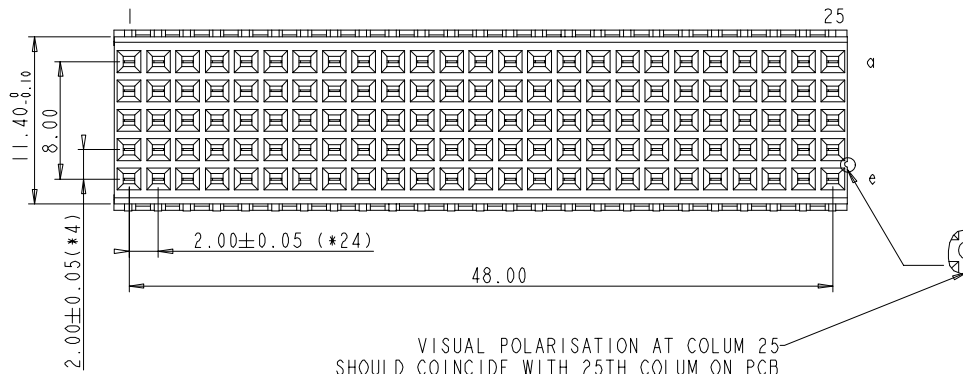

LAY-OUT
P.C.B. -HOLE
(FRONT SIDE)



PERFORMANCE CHARACTERISTICS

- CURRENT RATING: 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF=LEAD FREE
PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC .201844.003)
- THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION REVISION 00	KN	14-09-01
B	104-0109	ALEX E	27-11-04
C	DG05-0278	Mason	02-08-05
D	DG10-0110	NZ	2010.9.3
-	-	-	-
-	-	-	-
-	-	-	-

Material		Spec ref		tolerance 1 DEC±0.2 1 DEC 2 DEC±0.1 2 DEC ANGLE±1° HOEKEN		projection ⊕		MM ↔	
Mat code		✓		size A4		Scale 2.000			
Heat treat				Product family MILLIPICS		ECN			
Plating/Finish				Model Name		REL Level			
Dr	W.Panis	27-01-95			Model Revision				
Eng			Product family		MILLIPICS				
Chr			Model Name						
Appr			Model Revision						
FCI		title		MILLIPACS 2/TYPE B/SHIELDED		dwg no		BSC201907005	
Pro/E file		catalog no		HM2S02PE5101----		CUSTOMER DRAWING		sheet 1 of 1	
								Rev. D	