

5

4

3

2

1



Description: USB 2.0 A Plug to B Plug
 Part No: 30-3007-XX

DRAWING NO.
30-3007-XX-CUST

REVISIONS


01	OFFICIAL RELEASE				ECO-12-0335
	12-19-12	G Z	M W	M L	

D

D

C

C

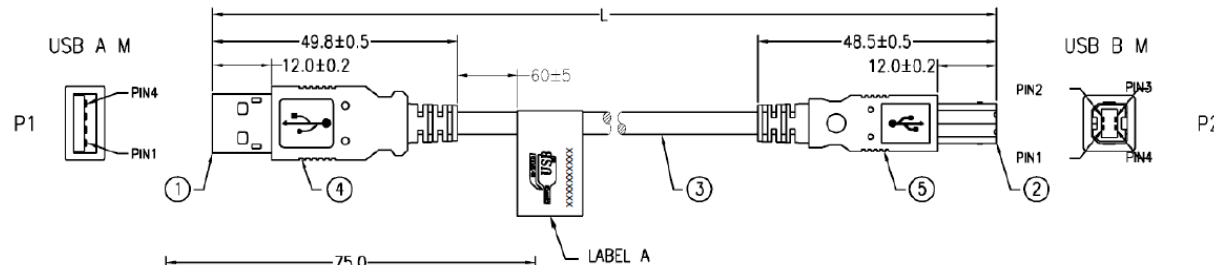

B

B

Part No.	Cable length
30-3007-3	3 ft.
30-3007-6	6 ft.
30-3007-10	10 ft.
30-3007-15	15 ft.

DIM OUTLINE

PIN ASSIGNMENT			
P1		P2	
1	—	1	RED 24#
2	—	2	WHITE
3	—	3	GREEN
4	—	4	BLACK 24#
SHIELD	—	SHIELD+BRAID	

CUSTOMER COPY

A

A

Cable Assembly Parts List			
ITEM	MATERIAL /SPECIFICATION	QTY	UNIT
1	USB A MALE 2.0, GOLD PLATING 30u" ON CONTACT WHITE INSULATOR, SHORT A PIERCE TYPE	1	PCS PCS
2	USB B MALE 2.0, GOLD PLATING 30u" ON CONTACT WHITE INSULATOR, SHORT A PIERCE TYPE	1	
3	USB 2.0,Cable UL Style one twisted pair 28 AWG,and 2C 24 AWG,BRAID SHIELDED WITH DRAIN WIRE, OD 4.5mm, JACKET GRAY-WHITE	L-25	mm
4	MOLDED PVC GRAY-WHITE		PCS
5	MOLDED PVC GRAY-WHITE		PCS

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY GARY.ZHG	DATE 12-19-12
DECIMALS	mm	CHECKED BY MONICA.W	DATE 12-19-12
X.X	+ 0.2	APPROVED BY MA LIN	DATE 12-19-12
X.XX	+ 0.1	U/M	mm
X.XXX	+0.08		
ANGLES	+ 0.5°		

EMERSON
Network Power

Connectivity Solutions

TITLE
USB 2.0 A Plug to B Plug

THIS DRAWING WAS PRODUCED BY COMPUTER,
DO NOT SCALE DRAWING OR UPDATE MANUALLY.

SHEET 1 OF 1	DRAWING NO. 30-3007-XX-CUST	SIZE A
-----------------	--------------------------------	-----------

5

4

3

2

1