

## Features

- Low forward voltage drop
- Low leakage current
- Moisture sensitivity: level 1, per J-STD-020
- Solder dip 260 °C, 10 s
- Low profile, typical thickness 1.0mm



RoHS  
COMPLIANT

Package: eSGB(SMAF)

## Applications

For use in low voltage, high frequency inverters, free wheeling and polarity protection applications.

## Absolute Maximum Ratings (T<sub>A</sub>=25°C unless otherwise noted)

Parameter	Symbol	LSL34	LSL345	Unit
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	40	45	V
Maximum RMS Voltage	V <sub>RMS</sub>	28	31.5	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	40	45	V
Maximum Average Forward Rectified Current	I <sub>F(AV)</sub>	3.0		A
Peak Forward Surge Current (8.3 ms single half sine-wave superimposed on rated load)	I <sub>FSM</sub>	50		A
Operating Junction Temperature Range	T <sub>J</sub>	- 55 to + 150		°C
Storage Temperature Range	T <sub>STG</sub>	- 55 to + 150		°C

## Electrical Characteristics (T<sub>A</sub>=25°C unless otherwise noted)

Parameter	Test Conditions	Symbol	Value	Unit
Instantaneous Forward Voltage	3 A	V <sub>F</sub>	0.45	V
Reverse Current at Rated DC Blocking Voltage	T <sub>A</sub> =25°C	I <sub>R</sub>	0.5	mA
	T <sub>A</sub> =125°C		100	
Junction Capacitance	4.0 V, 1 MHz	C <sub>J</sub>	300	pF
Typical Thermal Resistance	Junction to Lead	R <sub>θJL</sub>	30	°C/W

Note 1: Thermal resistance from junction to lead, mounted on PCB with 8.0×8.0mm copper pads

## Ratings and Characteristics Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

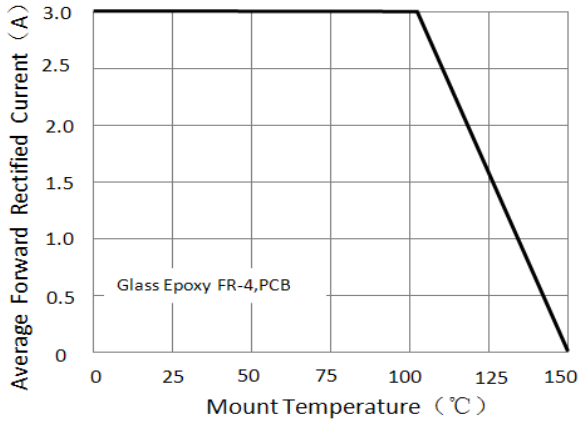


Figure 1. Forward Current Derating Curve

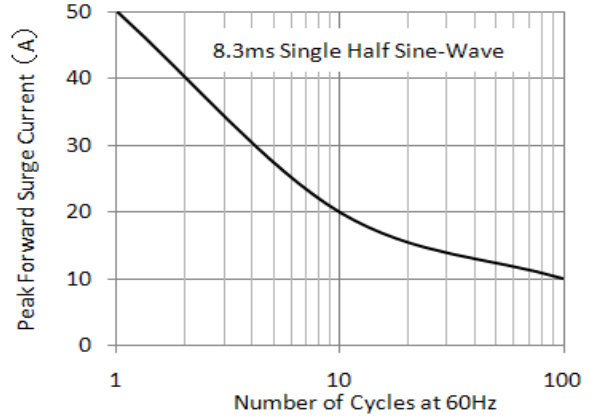


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

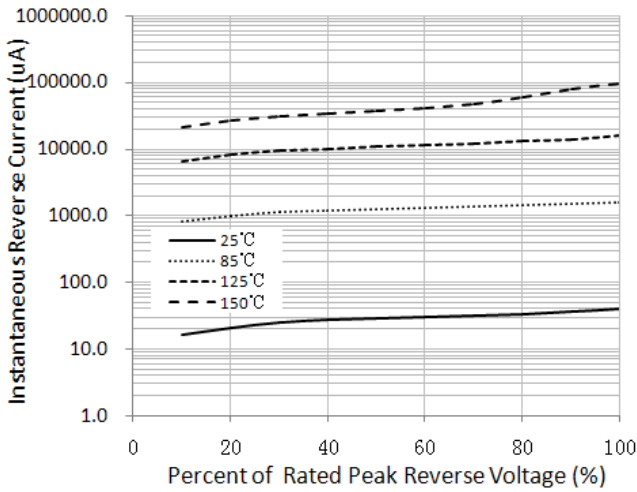


Figure 3. Typical Reverse Characteristics

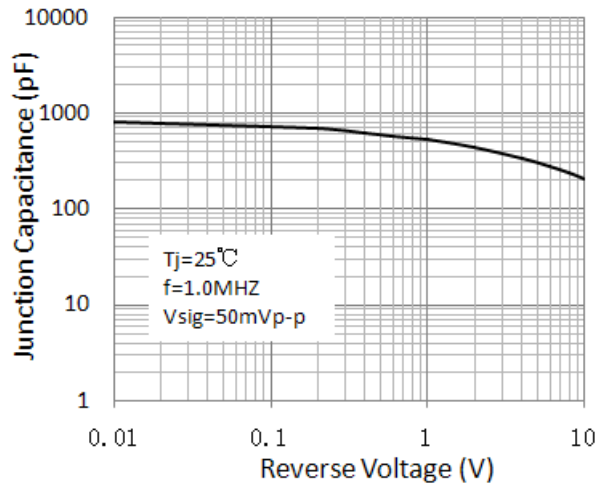


Figure 4. Typical Junction Capacitance


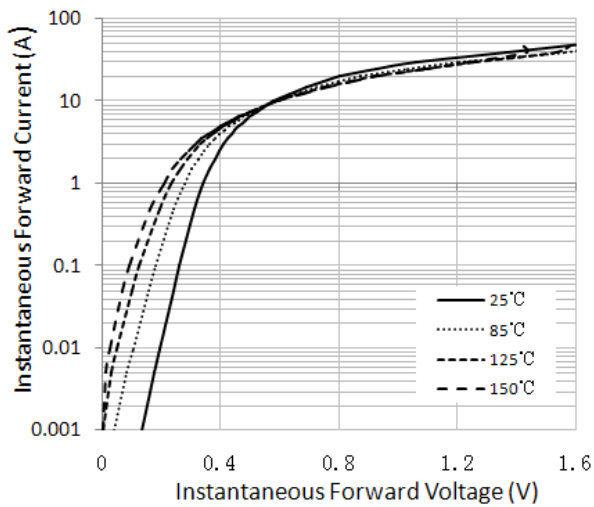


Figure 5. Typical Instantaneous Forward Characteristics


## Package Outline Dimensions

eSGB (SMAF)

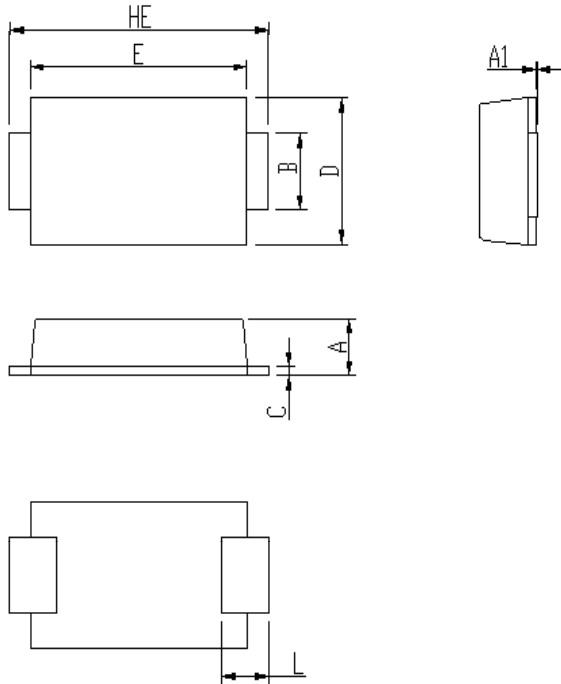

DIM	Unit: mm		Unit: inch	
	MIN	MAX	MIN	MAX
A	0.92	1.08	0.036	0.043
A1	0	0.1	0.000	0.004
B	1.25	1.45	0.049	0.057
C	0.1	0.25	0.004	0.010
D	2.6	2.8	0.102	0.110
E	4.1	4.3	0.161	0.169
L	0.7	1.1	0.028	0.043
HE	4.8	5.2	0.189	0.205

Soldering footprint

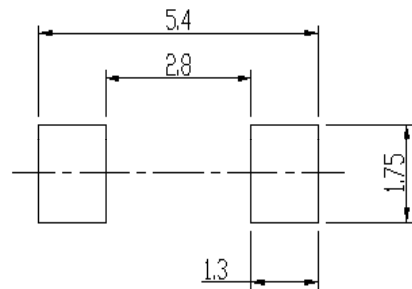

## Packing Information

**Packing quantities:**

10,000 pcs/Reel, 12mm Tape, 13" Reel

## Reel Tape & Reel Specification

