


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

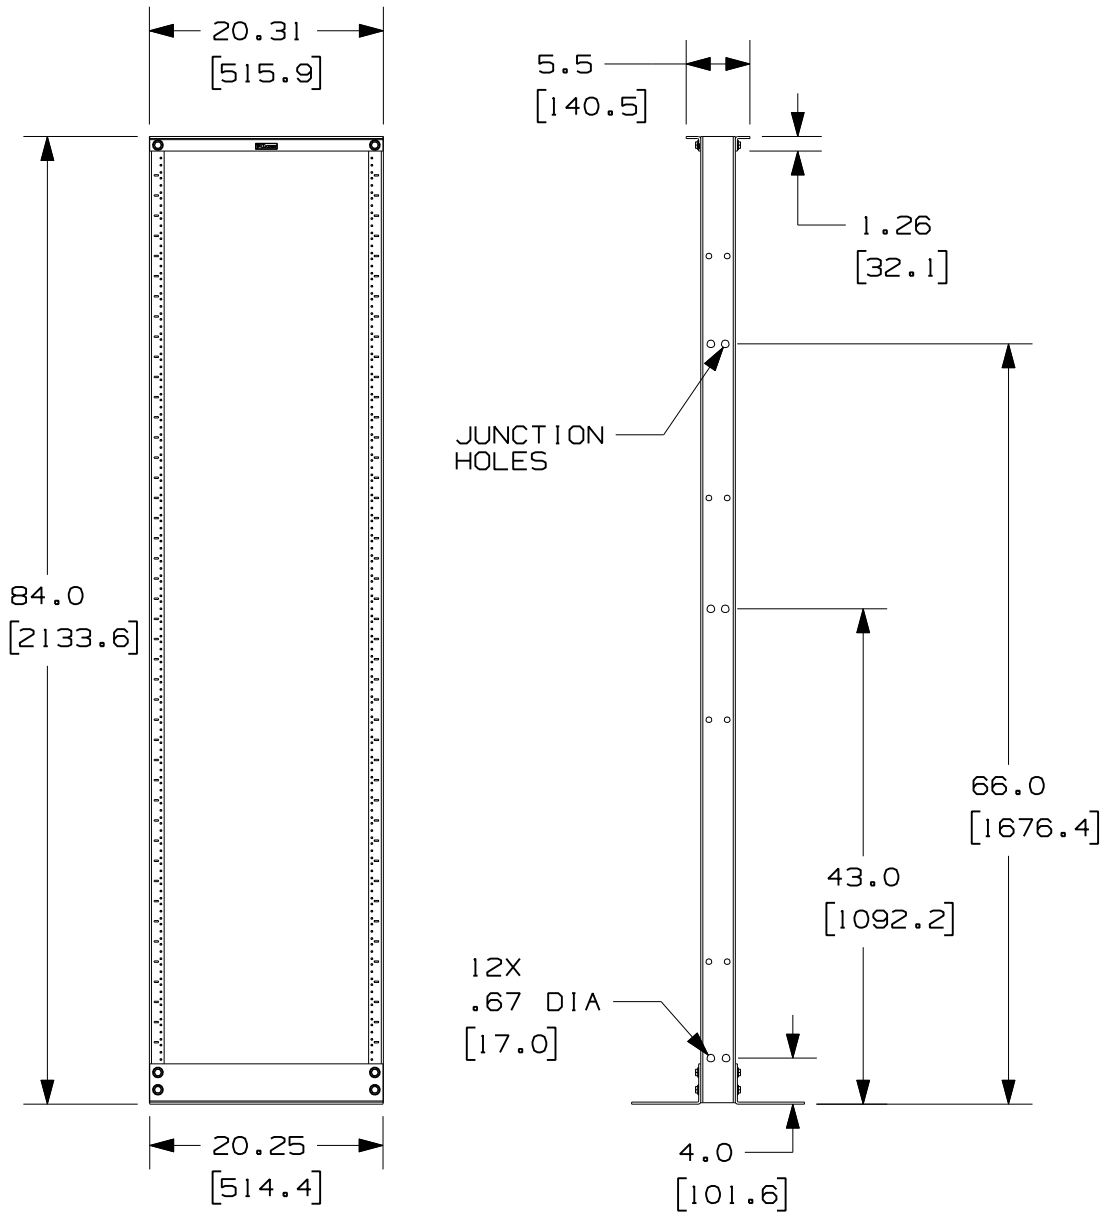

PANDUIT P/N	WEIGHT
CMR19X84S	53 LBS/EACH 24.0 Kg/EACH

NOTES:


- CAN BE USED WITH ANY INDUSTRY STANDARD 19" COMPONENT IN ADDITION TO ALL PANDUIT CABLE MANAGEMENT AND PATCH PANEL PRODUCTS.
- WILL HOLD UP TO 45 SINGLE RACK SPACINGS.
- EIA HOLE SPACING ON UPRIGHT CHANNELS: .625, .625, .500, .625, .625, .500, ETC.
- ASSEMBLY IS REQUIRED.
- RACK PART THICKNESSES:
  - UPRIGHT CHANNELS (11 GA): WEB- .125±.03  
FLANGE .125±.03
  - TOP BRACKET (7 GA): .179±.03
  - BASE BRACKET (7 GA): .179±.03
- DIMENSIONS IN PARENTHESES ARE METRIC.
- ALL ASSEMBLY HARDWARE INCLUDED:
  - (12) 3/8-16 X 1" BLACK HEX HEAD CAP SCREW
  - (24) 3/8" PAINT PIERCING GROUNDING WASHER
  - ( 1) TUBE OF ANTI-OXIDIZING PASTE
  - (12) 3/8-16 BLACK HEX NUT
  - (24) 12-24 X .5" SLOTTED PAN HEAD STEEL SCREW
- TESTED AND APPROVED 1000 LBS LOAD RATING BY UNDERWRITERS LABORATORIES.

MODEL FILENAME	V10103AA_STEEL_RACK_07.PRT
CAD FILENAME/LAYERS	V10103AA_DC_07B.PRT
<h1>PANDUIT</h1> CORP. TINLEY PARK, ILLINOIS	
STEEL CABLE MANAGEMENT RACK (CMR19X84S) CUSTOMER DRAWING	

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
3	1-11-07	LEE		C. UPDATED NOTES	10103-06				
2	7-13-06	LEE	KRKE	B. UPDATED GEOMETRY & NOTES	10103-06		KRKE		
1	4-22-05	JDWE	KRKE	A. UPDATED GEOMETRY	10103-06		KRKE		
R	1-28-03	JDWE	KRKE	RELEASED TO PRODUCTION	10103-06		RTSU		

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:		UNLESS OTHERWISE SPECIFIED,	
INCHES	[METRIC - MILLIMETER]	ALL DIMENSIONS ARE GIVEN	
X.X +/- 0.06	X +/- 1.5	IN INCHES, THIRD ANGLE PROJECTION.	
X.XX +/- 0.03	X.X +/- 0.8		
X.XXX +/- 0.015	X.XX +/- 0.4		
DRAWN BY JDWE		SCALE NONE	
DATE 1-28-03		DRAWING NO. 10103-06	
CHK'D KRKE		SHEET 1 OF 2	
MAT'L: STEEL - POWDER COATED BLACK		DWG SIZE A	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

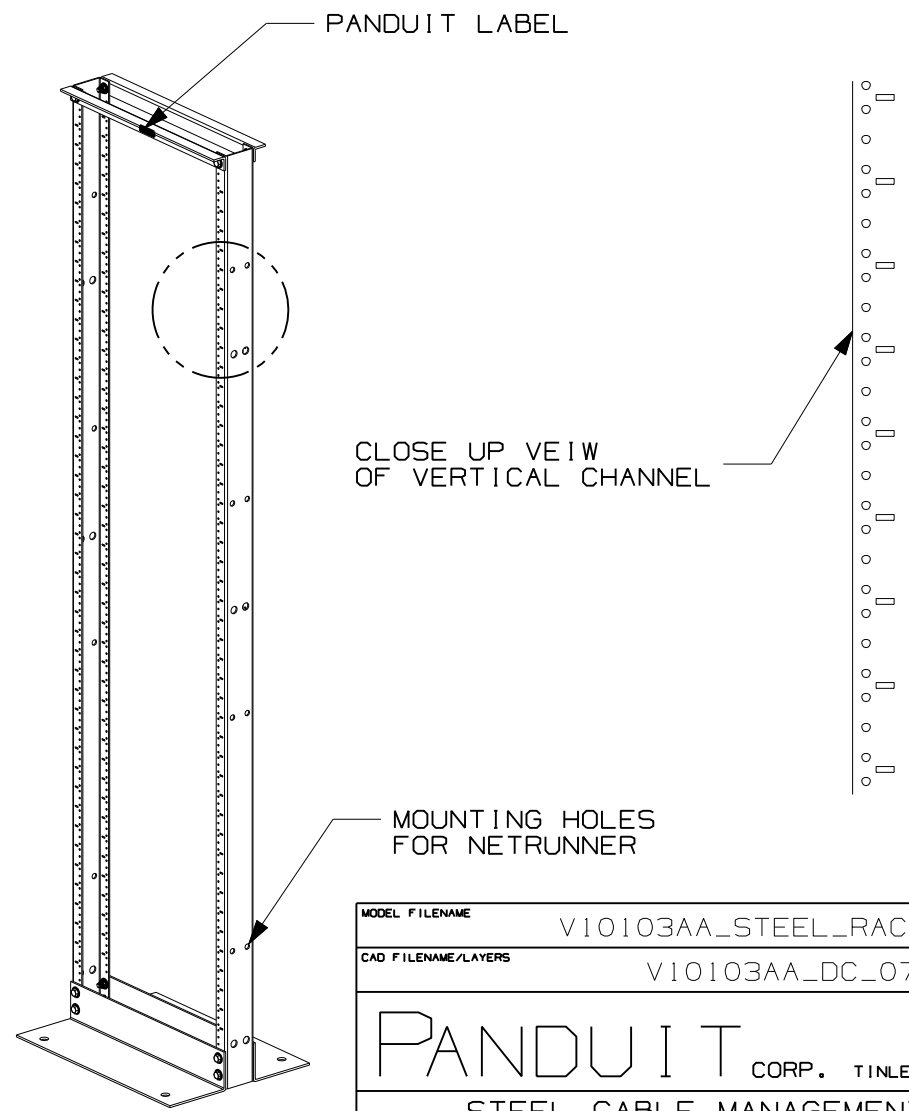

4X  
2.12  
[54.0]

2X 16.00  
[406.4]

2X  
12.50  
[317.5]

15.00  
[381.0]

4X  
1.25  
[31.8]

.750 DIA REF  
[19.05]

FLOOR MOUNTING HOLE  
(2 PLACES ON EACH  
BASE BRACKET)

MODEL FILENAME	V10103AA_STEEL_RACK_07.PRT
CAD FILENAME/LAYERS	V10103AA_DC_07B.PRT
<b>PANDUIT</b> CORP. TINLEY PARK, ILLINOIS	
STEEL CABLE MANAGEMENT RACK (CMR19X84S) CUSTOMER DRAWING	

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:		UNLESS OTHERWISE SPECIFIED,	
INCHES	[METRIC - MILLIMETER]	ALL DIMENSIONS ARE GIVEN	
X.X +/- 0.06	X +/- 1.5	IN INCHES, THIRD ANGLE PROJECTION.	
X.XX +/- 0.03	X.X +/- 0.8		
X.XXX +/- 0.015	X.XX +/- 0.4		
ANGLE	+/- 1°		
DRAWN BY	MAT'L:	SCALE	
JDWE	STEEL - POWDER COATED BLACK	NONE	
DATE		DRAWING NO.	
1-28-03		10103-06	
CHK'D		SHEET 2 OF 2	
KRKE		DWG SIZE	
		A	

3	1-11-07	LEE		SEE SHEET 1 OF 2 FOR REVISIONS	10103-06				
2	7-14-06	LEE	KRKE	SEE SHEET 1 OF 2 FOR REVISIONS	10103-06		KRKE		
1	4-22-05	JDWE	KRKE	SEE SHEET 1 OF 2 FOR REVISIONS	10103-06		KRKE		
R	1-28-03	JDWE	KRKE	SEE SHEET 1 OF 2 FOR REVISIONS	10103-06		RTSU		
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH