
1-1971876-4 - ACTIVE

Power Triple Lock TE Internal #: 1-1971876-4 Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock

### View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > POWER TRIPLE LOCK Plug, Standard Temperature

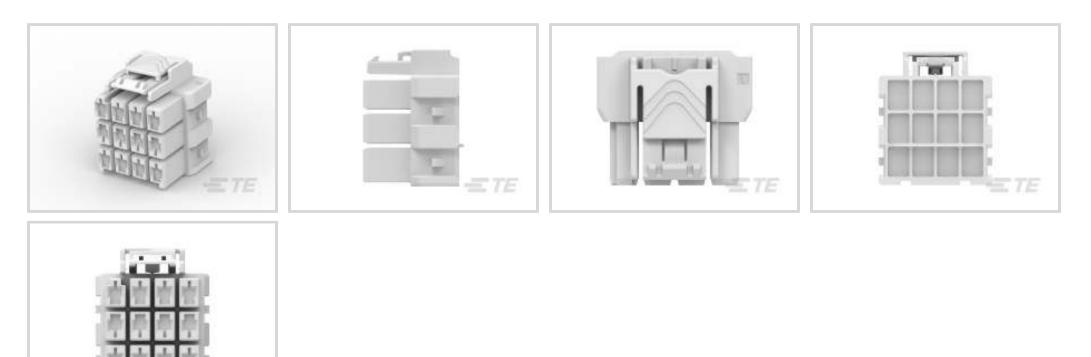

Rectangular Power Connector Type: Housing

Connector & Housing Type: Plug

Connector System: Wire-to-Wire

Number of Positions: 12

Centerline (Pitch): 6 mm [.236 in ]

All POWER TRIPLE LOCK Plug, Standard Temperature (48)

### Features

### Product Type Features

| Rectangular Power Connector Type  | Housing      |  |  |
|-----------------------------------|--------------|--|--|
| Connector & Housing Type          | Plug         |  |  |
| Connector System                  | Wire-to-Wire |  |  |
| Sealable                          | No           |  |  |
| Connector & Contact Terminates To | Wire & Cable |  |  |
| Configuration Features            |              |  |  |
| Number of Positions               | 12           |  |  |
| Number of Power Positions         | 12           |  |  |
| Number of Rows                    | 3            |  |  |
| Electrical Characteristics        |              |  |  |
| Operating Voltage                 | 600 VDC      |  |  |
| Body Features                     |              |  |  |
|                                   |              |  |  |

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



| Cable Exit Angle                   | 180°                       |  |
|------------------------------------|----------------------------|--|
| Connector & Keying Code            | A                          |  |
| Contact Features                   |                            |  |
| Contact Layout                     | Matrix                     |  |
| Contact Retention Within Housing   | Without                    |  |
| Contact Type                       | Receptacle                 |  |
| Termination Features               |                            |  |
| Termination Method to Wire & Cable | Crimp                      |  |
| Mechanical Attachment              |                            |  |
| Panel Mount Feature                | Without                    |  |
| Connector Mounting Type            | Cable Mount (Free-Hanging) |  |
| Housing Features                   |                            |  |
| Centerline (Pitch)                 | 6 mm[.236 in]              |  |
| Housing Color                      | Natural                    |  |
| Housing Material                   | PBT GF                     |  |
| Dimensions                         |                            |  |
| Row-to-Row Spacing                 | 8.1 mm[.319 in]            |  |

## Usage Conditions

| Operating Temperature Range    | -55 – 105 °C[-67 – 221 °F]    |  |
|--------------------------------|-------------------------------|--|
| Operation/Application          |                               |  |
| Circuit Application            | Power                         |  |
| Identification Marking         |                               |  |
| Circuit Identification Feature | With                          |  |
| Industry Standards             |                               |  |
| UL Rating                      | Recognized                    |  |
| Agency/Standard                | UL                            |  |
| Approved Standards             | UL E28476                     |  |
| UL Flammability Rating         | UL 94V-0                      |  |
| Glow Wire Rating               | Standard Part - Not Glow Wire |  |
| Packaging Features             |                               |  |
| Packaging Method               | Carton                        |  |

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU                  | Compliant  |  |
|---|--|--|
| EU ELV Directive 2000/53/EC                   | Compliant  |  |
| China RoHS 2 Directive MIIT Order No 32, 2016 | 6 No Restricted Materials Above Threshold  |  |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2023<br>(235)<br>Candidate List Declared Against: JAN 2023<br>(233)<br>Does not contain REACH SVHC |  |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900<br>ppm.  |  |
| Solder Process Capability                     | Not reviewed for colder process copobility   |  |

Solder Process Capability

Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**




Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock





# Also in the Series | Power Triple Lock

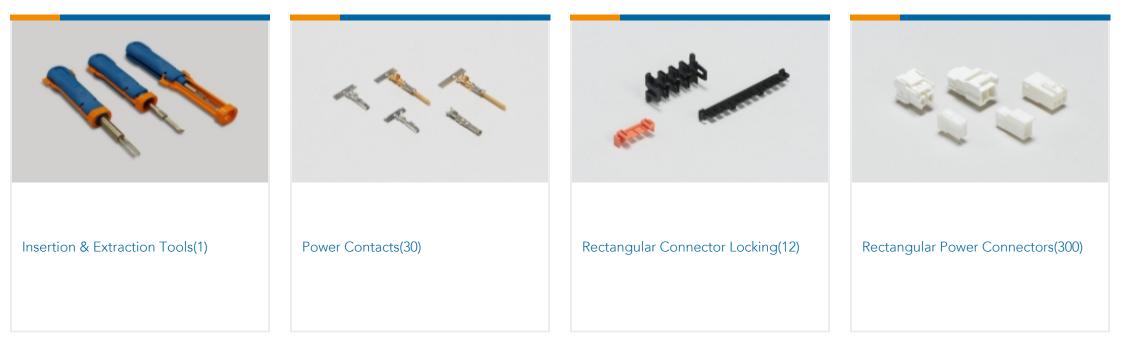

# Customers Also Bought



|   | ETE  |   | = TE  |
|---|--|---|---|
| TE Part #1971778-3<br>PTL TPA HIGH TEMP 2 x 3 BLACK | TE Part #1-1971772-4<br>Standard Temperature Caps   POWER<br>TRIPLE LOCK | TE Part #1971784-1<br>PTL TAB CONTACT, 16-19 AWG, 2X22<br>AWG | TE Part #1971781-1<br>Receptacle Contact — POWER TRIPLE<br>LOCK |



TE Part #1-1971773-2 POWER TRIPLE LOCK Plug, Standard Temperature

## Documents

Product Drawings PTL 3X4 PLUG HSG STD TEMP KEY A NAT

English

### **CAD** Files

3D PDF

3D

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 12 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Customer View Model

ENG\_CVM\_CVM\_1-1971876-4\_E.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1-1971876-4\_E.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-1971876-4\_E.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 1-1773734-9 TE Power Triple Lock Quick Reference Guide - German

German

9-1773465-1Power Triple Lock QRG

English

**Product Specifications** 

**Application Specification** 

English

**Product Environmental Compliance** 

**Product Compliance** 

English

**Product Compliance** 

English