
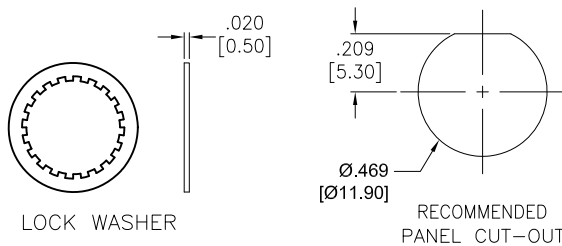
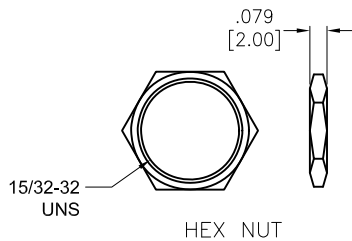
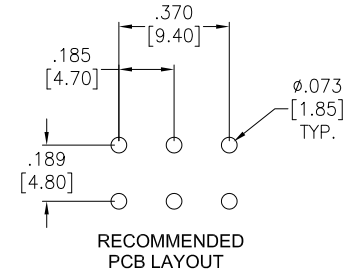
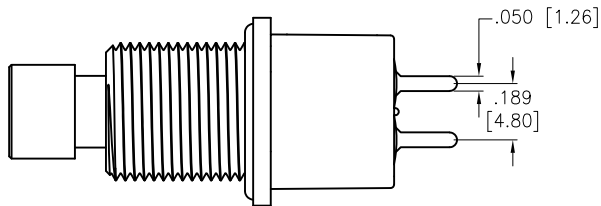

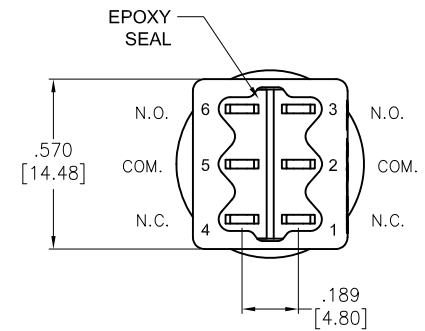
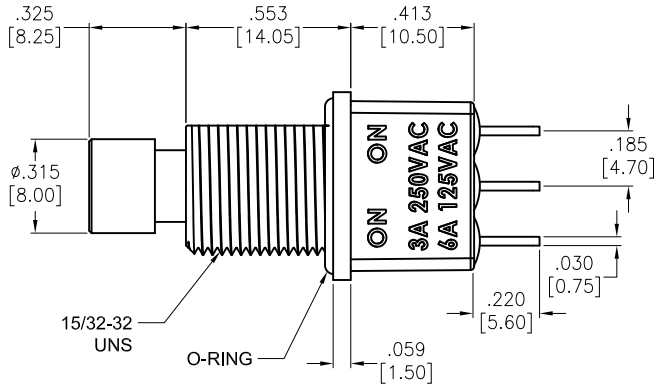


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/26/21	

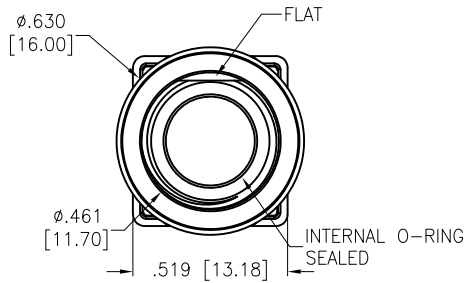

BUTTON POSITION		
FUNCTION	ON	ON
TERMINALS	2-3, 5-6	2-1, 5-4

SPECIFICATIONS:

Material:
 Case: DAP, Rated UL94V-0
 Plunger: Brass, color Black w/ O-Ring
 Bushing: Brass, color Black w/ O-Ring
 Movable Contact: Copper Alloy, Silver Plated
 Terminal: Copper Alloy, Silver Plated

Electrical:
 Rating: 6A @ 125VAC or 28V DC
 3A @ 250VAC
 Contact resistance: 10 mΩ max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1,500V RMS @Sea level
 Life: 50,000 cycles at full load

Temperature Rating:
 Operating temperature: -30°C to +85°C

Environmental:

Sealed IP68 Rated
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE
DRAWN	LH	1/26/21
CHECKED	AC	1/26/21
APPROVED		

ADAM TECH
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE		
HIGH PERFORMANCE PUSH BUTTON SWITCH, DPDT, ON-ON, SILVER PLATED, PCB TAILS		
SIZE	PART NO.	REV.
X	SW-PB10-BAA2QE-4	-
REF:	S00198T	SCALE: NTS SHEET 1 OF 1

6 5 4 3 2 1

6 5 4 3 2 1