




Ad: Building B 3rd Yushan Industrial Park Shi Yan Bao An District Shenzhen China

Tel: 0086-755-23125058 Fax:0086-755-23125658 Web:www.shiji-led.com


E-mail: contact@shiji-led.com

Web:www.ipixelled.cn

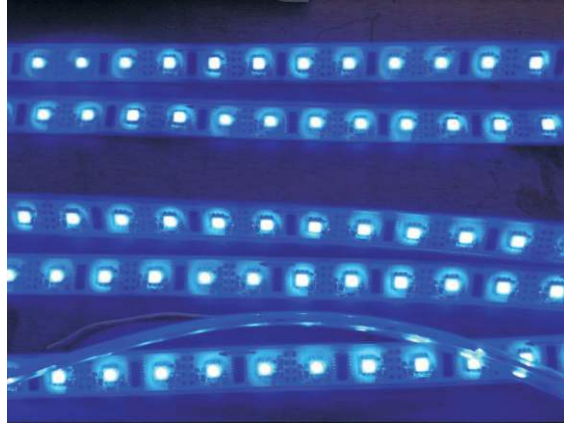

LPD8806 Addressable LED strip(CID2182)

Outline Dimension (Unit:mm)

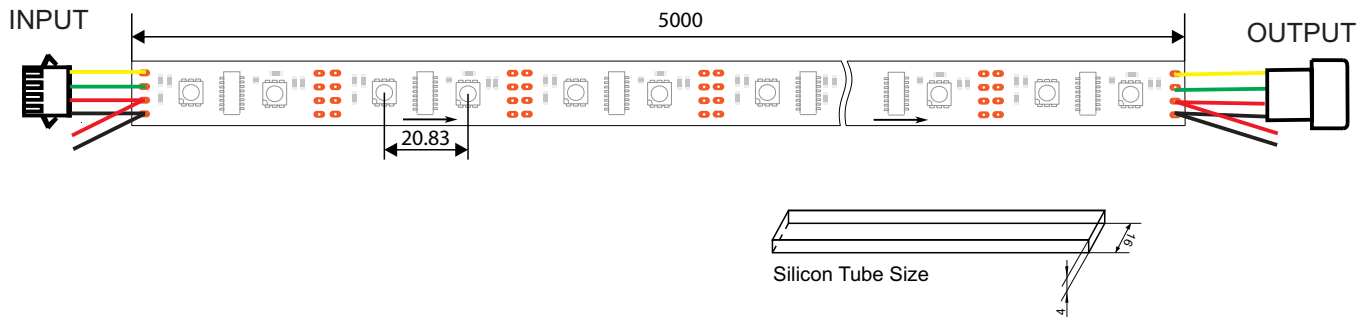

P/N	Size/mm	LED	IC/Qty/m	LED Qty/m	Luminous(mcd)	Angle	Voltage	Wattage/m	IP Rate
SJ-10048-8806-5m	5000*15	5050RGB	LPD8806/24	48	R:38400 G:81600 B:43200	140°	DC5V	11.52W(max)	IP 65 IP 20

Product features

- 1-This digital strip 5meters in a reel ,48pcs RGB LED per meter,every 2LEDs driven by LPD8806
- 2-Flexible PCB : White only,PCB Width 15mm
- 3-Waterproof version-Silicon Tube coating :W 16* H4mm
- 4-DC5V power requirement only(do not exceed 6VDC or short circuit),
- 5-4Pin JST SM connector (non-waterproof) soldered in each end of strip, extra 2 single wire for Powering in input&output side
- 6 Control: SD controller,DMX decoder,Artnet,Arduino etc
- 7-Customer size available




Ad: Building B 3rd Yushan Industrial Park Shi Yan Bao An District Shenzhen China


Tel: 0086-755-23125058 Fax:0086-755-23125658 Web:www.shiji-led.com

E-mail: contact@shiji-led.com

Web:www.ipixelled.cn

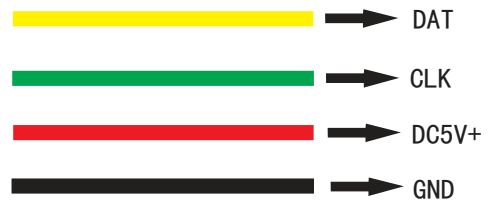

CONNECTION

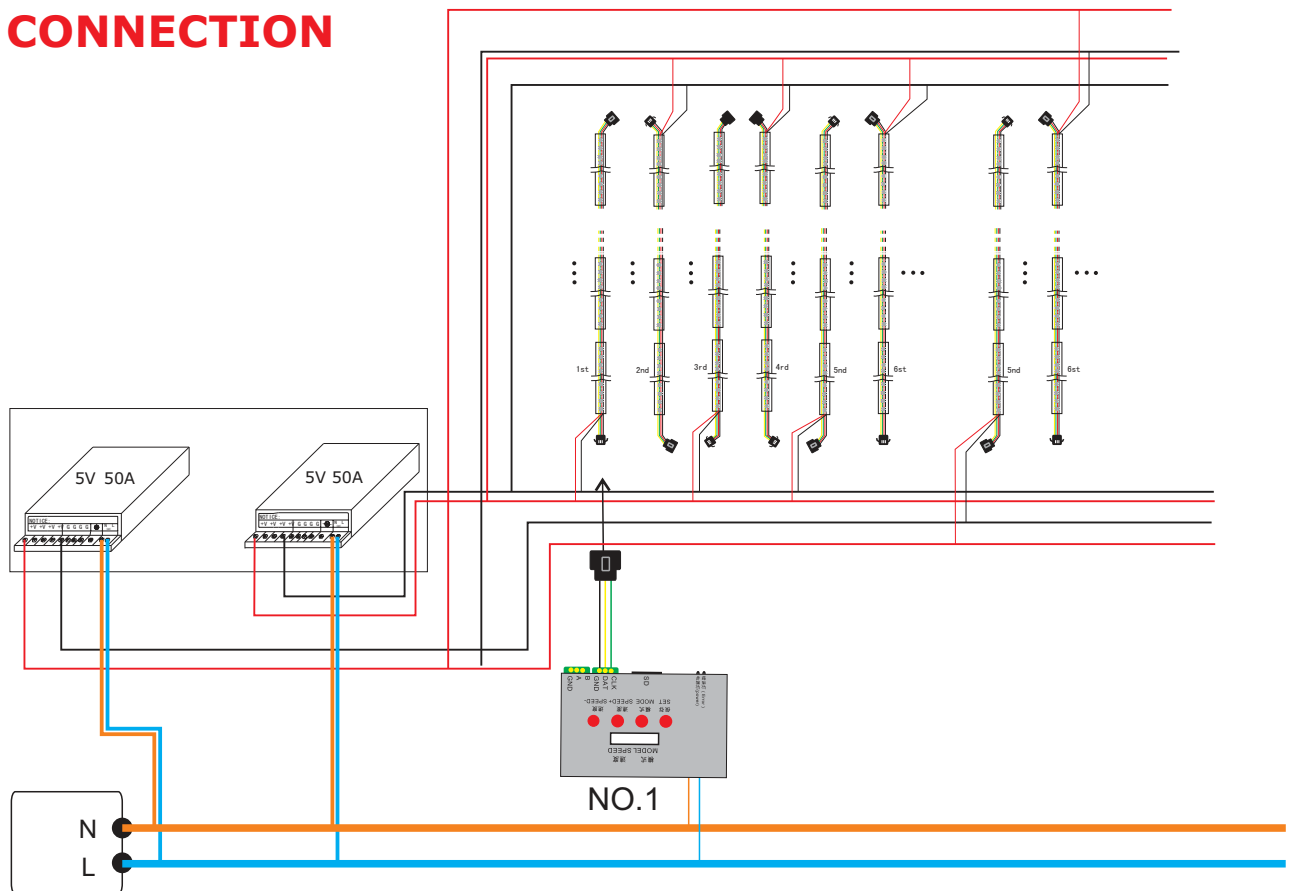

AC 110 / 220V