

IE-CCM-3P-8.5**Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com



The Weidmüller connecting module is helpful whenever you have to repair or want to extend a broken installation cable without cable reserve in confined spaces.

General ordering data

Version	Connecting module, IP68 (50 m / 24 h)
Order No.	2685560000
Type	IE-CCM-3P-8.5
GTIN (EAN)	4050118695311
Qty.	1 pc(s).

IE-CCM-3P-8.5

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Technical data

Dimensions and weights

Net weight 35 g

Temperatures

Operating temperature -40 °C...105 °C

General Info

Number of poles	3	Description of article	Connecting module
Colour	black	Housing main material	Nylon + Glass fibre, UL Recognized
Tightening torque fixing nut	0.9 Nm	Contact material	Nickel plated
Conductor connection cross-section, solid (AWG)	AWG 18...AWG 12	Wire cross-section, solid, min. (AWG)	AWG 18
Wire cross-section, solid, max. (AWG)	AWG 12	Wire connection cross section, finely stranded, min.	0.75 mm ²
Wire connection cross section, finely stranded, max.	3.5 mm ²	Conductor connection cross-section, flexible	0.75...3.5 mm ²
Sheath diameter, min.	6.5 mm	Sheath diameter, max.	8.5 mm
Contact holder materials	Nylon + Glass fibre, UL Recognized	Protection degree	IP68 (50 m / 24 h)

Electrical properties

Rated current 20 A Rated voltage 600 V

General standards

Certificate No. (cURus) E486077

Classifications

ETIM 6.0	EC002780	ETIM 7.0	EC002780
ETIM 8.0	EC002780	ECLASS 9.0	27-14-11-52
ECLASS 9.1	27-14-11-52	ECLASS 10.0	27-14-11-52
ECLASS 11.0	27-14-11-52	ECLASS 12.0	27-14-11-52

Approvals

Approvals



ROHS Conform
 UL File Number Search UL Website
 Certificate No. (cURus) E486077

Downloads

Engineering Data [CAD data – STEP](#)
 User Documentation [MAN IE GUIDE DE](#)
[MAN IE GUIDE EN](#)
 Catalogues [Catalogues in PDF-format](#)

Data sheet

IE-CCM-3P-8.5

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030


32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

Drawings

Dimensioned drawing

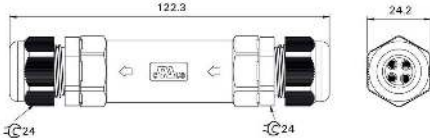

Installation cut-out info@weidmueller.com

