
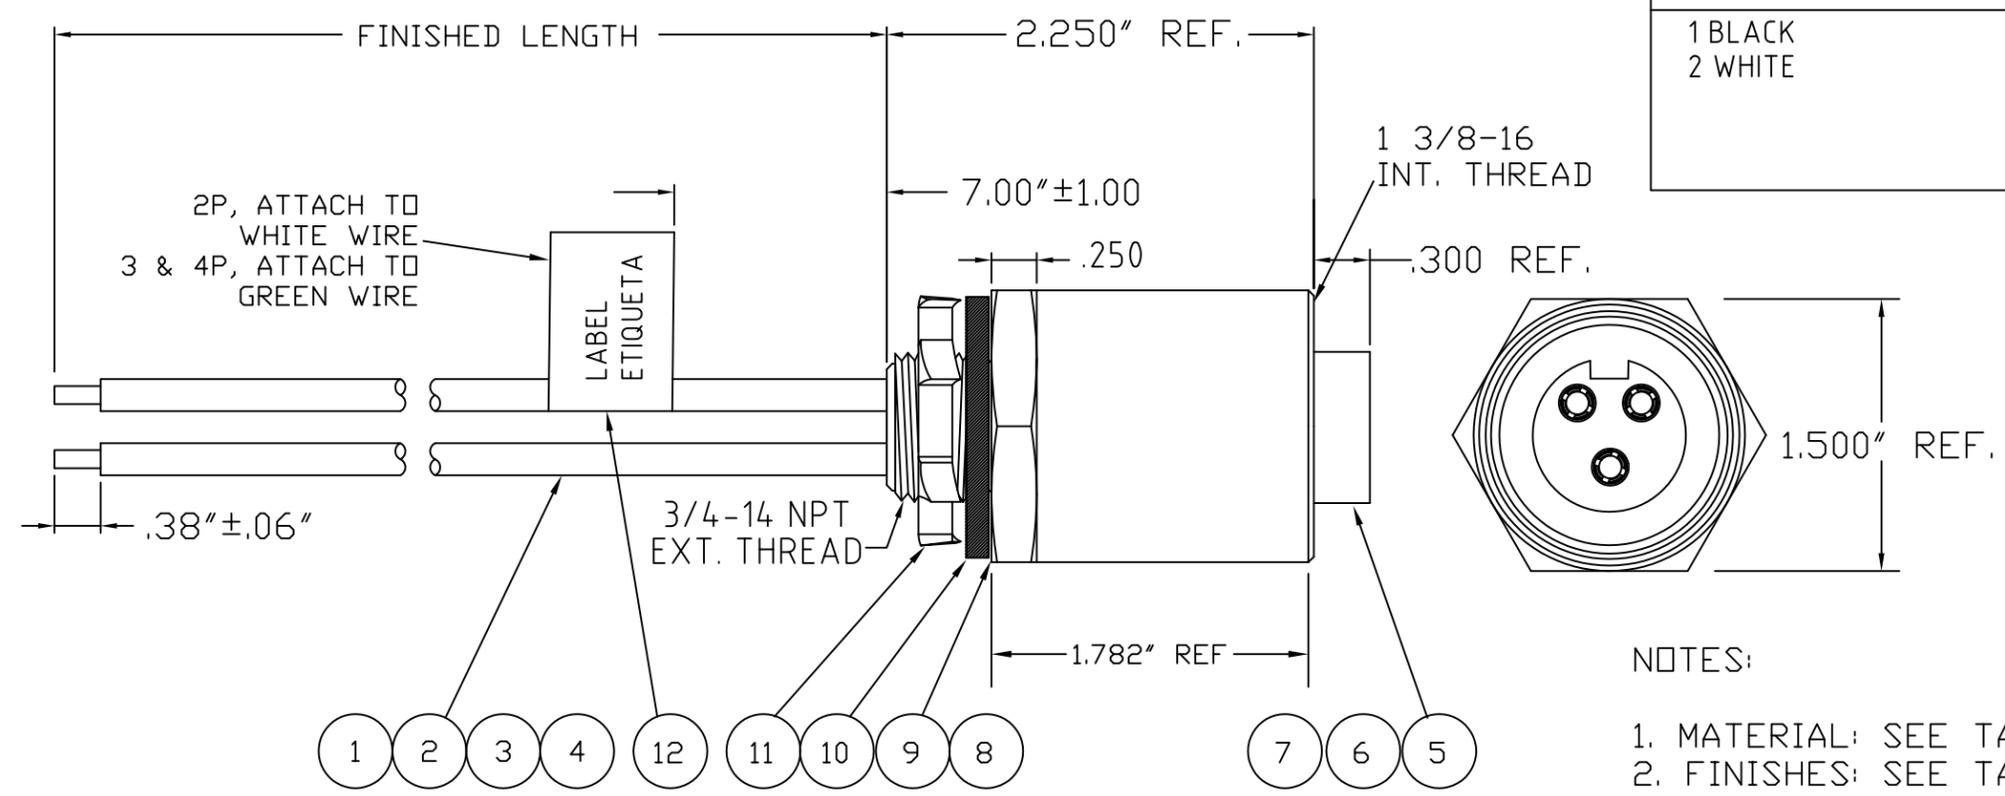


MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
1300660132	CR3C00A29M006	0.6 Meters
1300660264	CR4C00A29M020	2 Meters

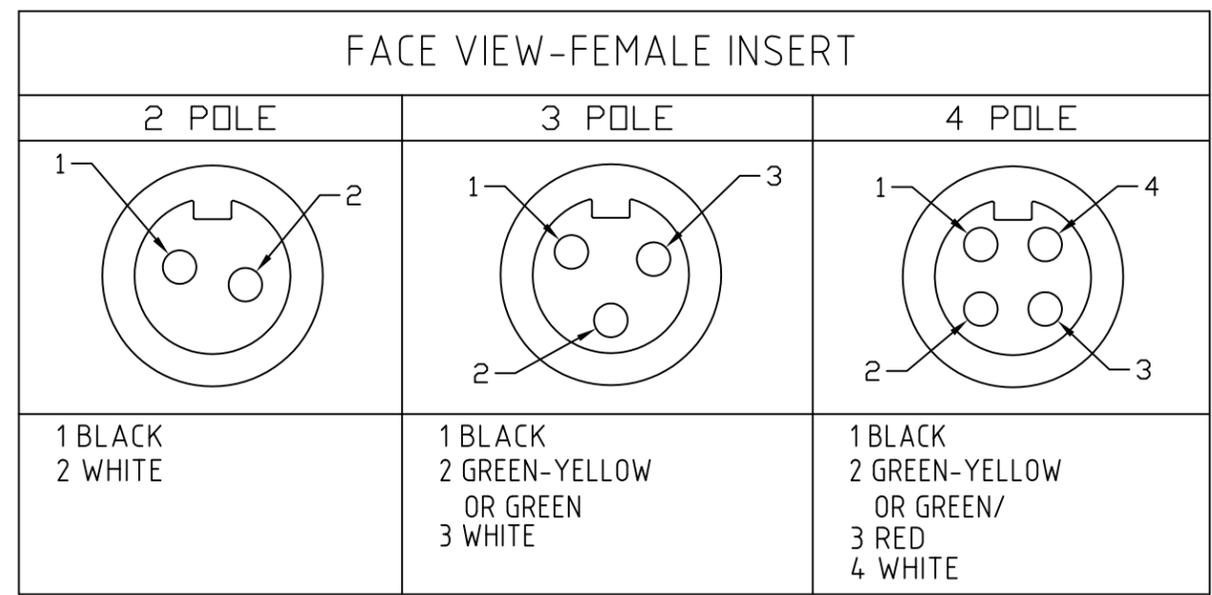

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. ELECTRICAL SPECIFICATIONS:
2 & 3 POLE- 600 VOLTS 25 AMPS
4 POLE- 600 VOLTS 20 AMPS
 4. ASSEMBLY IS ROHS COMPLIANT
 5. ASSEMBLY IS UL LISTED PER UL 2238, CATEGORY CYJV

12	1	FLAG LABEL	VINYL	YELLOW
11	1	3/4-14 NPT LOCKNUT	STEEL	ZINC PLATE
10	1	GASKET	NEOPRENE	BLACK
9	A/R	EPOXY HARDENER		BLACK
8	A/R	EPOXY RESIN		BLACK
7	1	RECEPTACLE SHELL	ALUMINUM ALLOY	CLEAR ANODIZED
6	1	FEMALE INSERT 2P, 3P OR 4P	PVC	BLACK
5	2, 3 OR 4	SOCKET CONTACT	COPPER ALLOY	GOLD PLATED
4	A/R	#12-1 WIRE PVC RED	PVC JACKET	RED
3	A/R	#12-1 WIRE PVC GREEN	PVC JACKET	GREEN
2	A/R	#12-1 WIRE PVC WHITE	PVC JACKET	WHITE
1	A/R	#12-1 WIRE PVC BLACK	PVC JACKET	BLACK
ITEM	QTY	DESCRIPTION	MATERIAL	FINISH

2/9/10 EC NO: WNA2010-0497 DRWN: KJOZWK CHKD: LHARTMAN APPR: JFMURPHY 2010/03/29	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH		SCALE ----	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		4 PLACES ±--- ±--- 3 PLACES ±--- ±.005 2 PLACES ±--- ±.01 1 PLACE ±--- ±---	DRAWN BY MODELL	DATE 2008/09/10	TITLE QC FEMALE 12 AWG 3/4" NPT RECPT CRXC00A29XXXX			
		ANGULAR ±1/2°		CHECKED BY RDEROSS	DATE 2008/09/10	MOLEX INCORPORATED		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		APPROVED BY JFMURPHY	DATE 2010/03/29	MATERIAL NO.	DOCUMENT NO. SD-130066-016	SHEET NO. 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

F
E
D
C
B
A

F
E
D
C
B
A