


International IRF Rectifier

220CMQ030

SCHOTTKY RECTIFIER

220 Amp




Major Ratings and Characteristics

Characteristics	220CMQ030	Units
$I_{F(AV)}$ Rectangular waveform	220	A
V_{RRM}	30	V
I_{FSM} @tp = 5 μ s sine	22,500	A
V_F @110Apk, $T_J = 125^\circ\text{C}$ (per leg)	0.40	V
T_J range	-55 to 150	$^\circ\text{C}$

Description/Features

The 220CMQ030 high current Schottky rectifier module has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to 150 $^\circ\text{C}$ junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, welding and reverse battery protection.

- 150 $^\circ\text{C}$ T_J operation
- Center tap module - Isolated Base
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

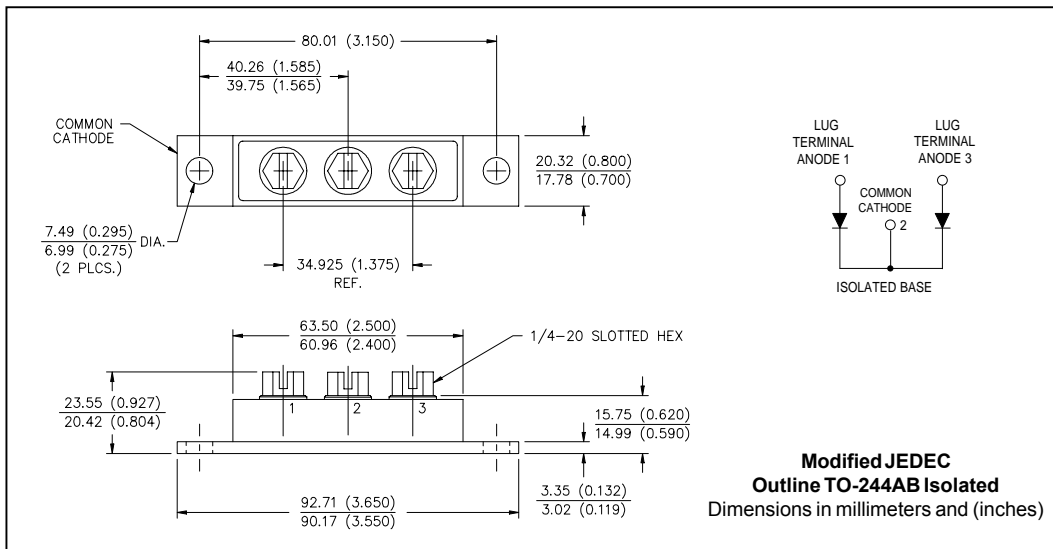

220CMQ030

Bulletin PD-2.555 rev. B 08/01



Voltage Ratings

Part number	220CMQ030
V _R Max. DC Reverse Voltage (V)	30
V _{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	220CMQ	Units	Conditions
I _{F(AV)} Max. Average Forward Current (Per Leg) * See Fig. 5 (Per Device)	110 220	A	50% duty cycle @ T _C = 100 °C, rectangular waveform
I _{FSM} Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	22,500 2,400	A	5µs Sine or 3µs Rect. pulse 10ms Sine or 6ms Rect. pulse Following any rated load condition and with rated V _{RRM} applied
E _{AS} Non-Repetitive Avalanche Energy (Per Leg)	99	mJ	T _J = 25 °C, I _{AS} = 22 Amps, L = 0.41 mH
I _{AR} Repetitive Avalanche Current (Per Leg)	22	A	Current decaying linearly to zero in 1µsec Frequency limited by T _J max. V _A = 1.5 x V _R typical

Electrical Specifications

Parameters	220CMQ	Units	Conditions
V _{FM} Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)	0.48	V	@ 110A T _J = 25 °C
	0.57	V	@ 220A
	0.40	V	@ 110A T _J = 125 °C
	0.52	V	@ 220A
I _{RM} Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1)	10	mA	T _J = 25 °C
	560	mA	T _J = 125 °C V _R = rated V _R
V _{F(TO)} Threshold Voltage	0.23	V	T _J = T _J max.
r _t Forward Slope Resistance	1.16	mΩ	
C _T Max. Junction Capacitance (Per Leg)	7,400	pF	V _R = 5V _{DC} , (test signal range 100Khz to 1Mhz) 25 °C
L _S Typical Series Inductance (Per Leg)	7.0	nH	From top of terminal hole to mounting plane
dv/dt Max. Voltage Rate of Change	10000	V/µs	(Rated V _R)
V _{RMS} Insulation Voltage	1000	V	

(1) Pulse Width < 300µs, Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	220CMQ	Units	Conditions	
T _J Max. Junction Temperature Range	-55 to 150	°C		
T _{stg} Max. Storage Temperature Range	-55 to 150	°C		
R _{thJC} Max. Thermal Resistance Junction to Case (Per Leg)	0.70	°C/W	DC operation * See Fig. 4	
R _{thJC} Max. Thermal Resistance Junction to Case (Per Package)	0.35	°C/W	DC operation	
R _{thCS} Typical Thermal Resistance, Case to Heatsink	0.10	°C/W	Mounting surface, smooth and greased	
wt Approximate Weight	79(2.80)	g(oz.)		
T Mounting Torque	Min.	24(20)	Kg-cm (lbf-in)	
	Max.	35(30)		
	Mounting Torque Center Hole	Typ.		13.5(12)
	Terminal Torque	Min.		35(30)
		Max.		46(40)
Case Style	TO-244AB Isolated		Modified JEDEC	

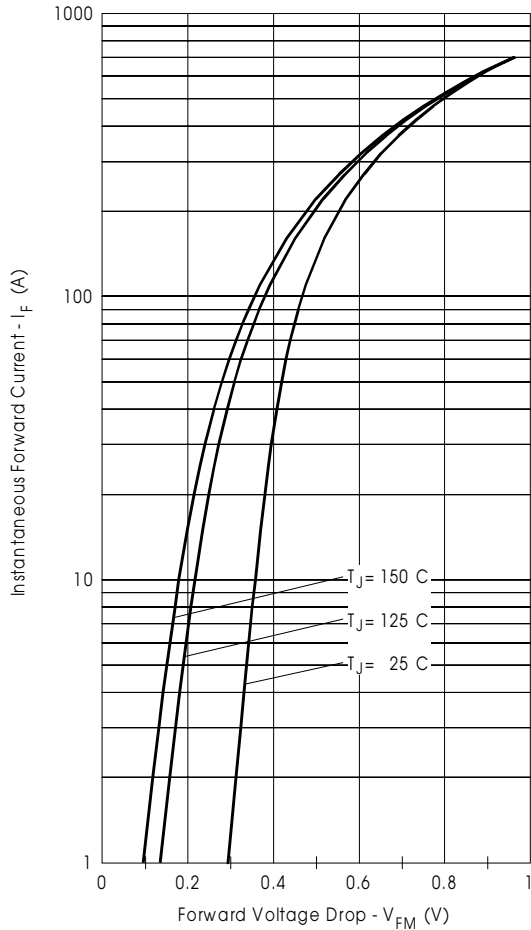


Fig. 1 - Max. Forward Voltage Drop Characteristics (PerLeg)

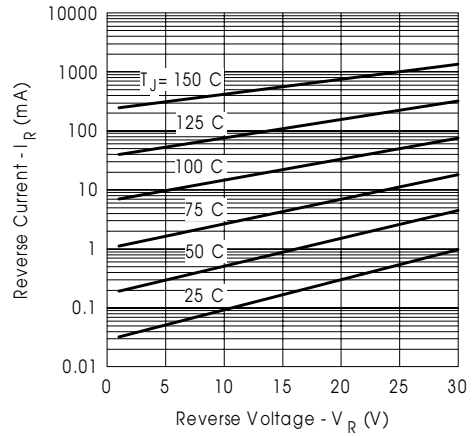


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (PerLeg)

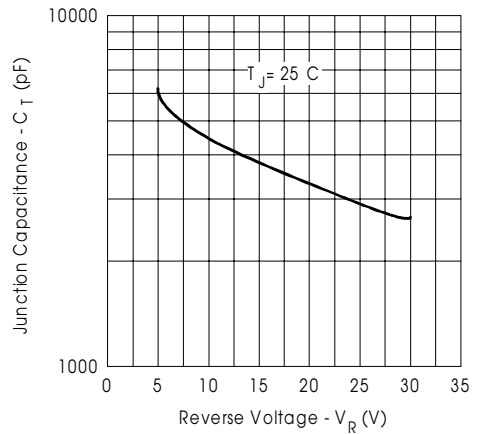


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (PerLeg)

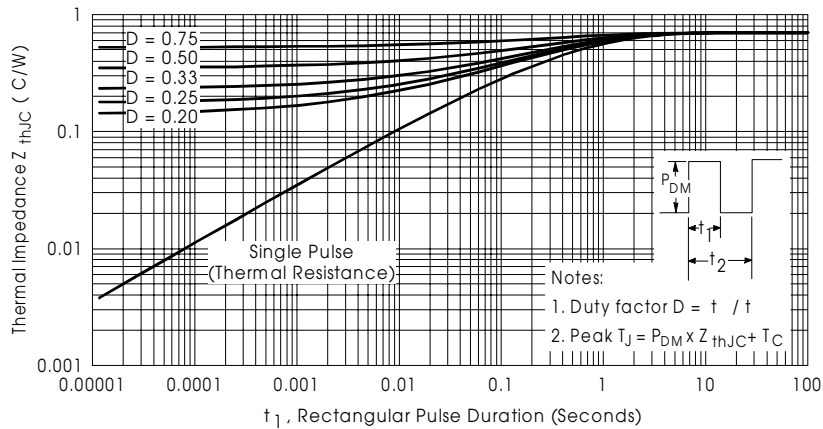


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (PerLeg)

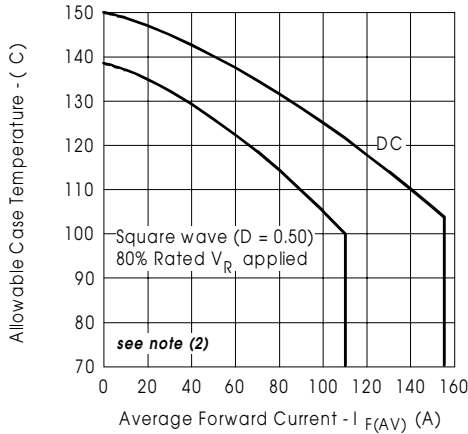


Fig. 5- Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

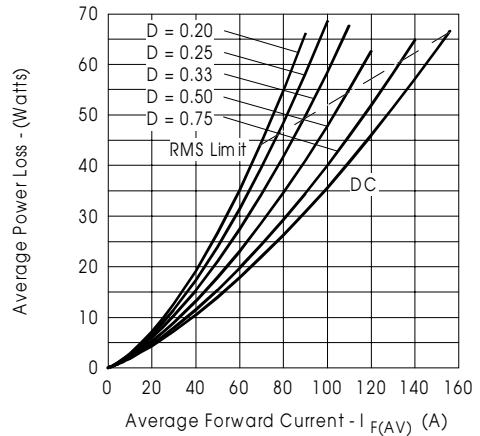


Fig. 6- Forward Power Loss Characteristics (Per Leg)

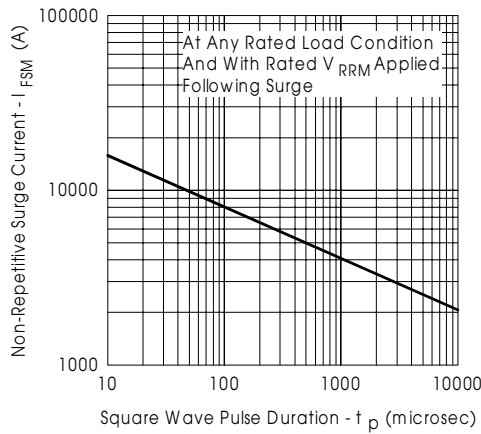


Fig. 7- Max. Non-Repetitive Surge Current (Per Leg)

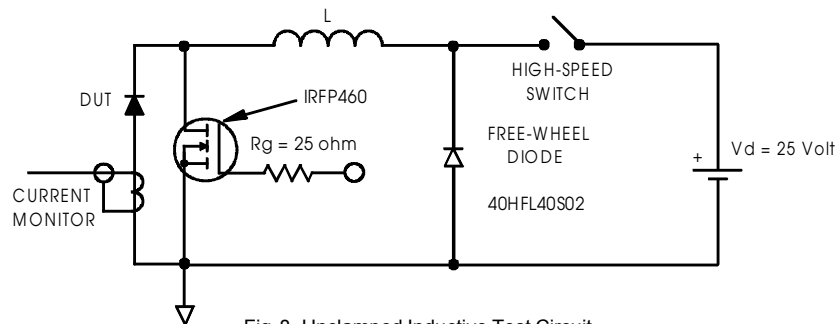



Fig. 8- Unclamped Inductive Test Circuit

(2) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$;

P_d = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

$P_{d_{REV}}$ = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = 80\%$ rated V_R

Ordering Information Table

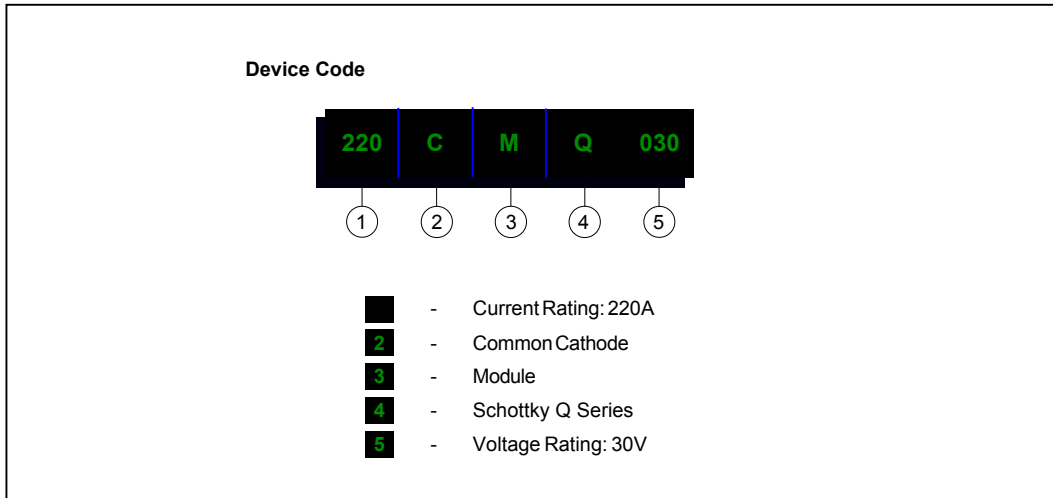

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.