



13100 Alondra Blvd., # 106. Cerritos, California 90703
 Tel: 562-677-1268, Fax: 562-677-1269
 web site: <http://www.enhanceusa.com>

- Power The World with Highest Efficiency

ENP-7030D

Features

- Active PFC
- Protections: OVP, OPP, SCP, OTP
- Reliability: MTBF 100,000 hrs @ 25°C, Full Load
- High Efficiency: 82% @ 115Vac, Full Load
- Safety Approval: cUL, NEMKO, CB
- Warranty: 1-year manufacturer



10



Input Specification						
Parameter	Conditions/ Description	Min.	Normal	Max.	Units	
Input Voltage Range	Universal Input	90	100-240	264	V(ac)	
Input Frequency Range		47	60/ 50	63	Hz	
Input Current	Measured at 90 Vac / 264 Vac input, full load output		5/ 2.5		A	
Inrush Current	Measured at 50A@115Vrms/ 100A@ 230Vac (25°C ambient temperature, cold start).				A	
Efficiency (Meet 80+ Bronze)	Measured at 115 Vac @ Full Load		82		%	



Output Specification											
Parameter	Conditions/ Description	Voltage Regulation			Ripple Noise	Output Current (Amps)					
		Range	Min. (V)	Max. (V)	(mVp-p)	Min.	Normal	Max.	Peak	Units	
+3.3VDC		+/- 5%	3.14	3.47	50	0.2	-	13	-		
+5VDC		+/- 5%	4.75	5.25	50	0.2	-	14	-		
+12V1DC		+/- 5%	11.4	12.6	120	0.6	-	20	22		
+12V2DC		+/- 5%	11.4	12.6	120	0.6	-	20	22		
-12VDC		+/- 10%	-10.8	-13.2	120	0	-	0.3	-		
+5VSB		+/- 5%	4.75	5.25	50	0	-	2	2.5		
Voltage Hold-Up Time	Measured at 115Vac/ 60Hz or 230Vac/ 50Hz/ 75% load after power source removed.					17					mSec
Output Rise Time								10			mSec
Total Combined Output of +3.3V and +5V can not exceed 80W.											
Total Combined Output of +12V1 & +12V2 can not exceed 275W.											

Environmental Specification							
Parameter	Conditions/ Description	Min.	Normal	Max.	Units		
MTBF	Calculated via MIL-HDBK-217F @ 25°C ambient temperature, Full load, 110 Vac	100,000			Hours		
Operating Temperature	Full load	0		40	°C		
Storage Temperature		-40		70	°C		
Relative Humidity	Non-Condensing	20		85	%		
Dimension	Length x Width x Height	100 x 180 x 40.5/ 3.93 x 7.08 x 1.59			mm / inch		
Cooling Fan	12VDC					40	mm
ROHS	European Directive 2002/ 95/ EC						

Reliability Protection		
Parameter	Conditions/ Description	Recovery Mode
Overload	Transit to current limit mode if output over 110% - 160%	Shut Down Output, Auto recover once reset AC power-on by user
Over Voltage		Shut Down Output, Auto recover once reset AC power-on by user
Short Circuit		Shut Down Output, Auto Recover once faults conditions removed
Over Temperature		Shut Down Output, Auto Recover once faults conditions removed

Safety & EMC Compliance		
Category	Standard	Comment
SAFETY	cUL, Nemko, CB	Approved
EMI Conduction & Radiation		Compliance
Harmonic Current Emissions		EN61000-3-2 Compliance
EMS Immunity	Voltage Fluctuation	EN61000-3-3 Compliance
	Electrostatic Discharge (ESD)	EN61000-4-2 Compliance
	Radiated Susceptibility	EN61000-4-3 Compliance
	Fast Transients/ Burst - EFT	EN61000-4-4 Compliance
	Input Line Surge Immunity	EN61000-4-5 Compliance
	Conducted Susceptibility	EN61000-4-6 Compliance
	Power Frequency Magnetic Field	EN61000-4-8 Compliance
Voltage Dips	EN61000-4-11 Compliance	

- Power The World with Highest Efficiency

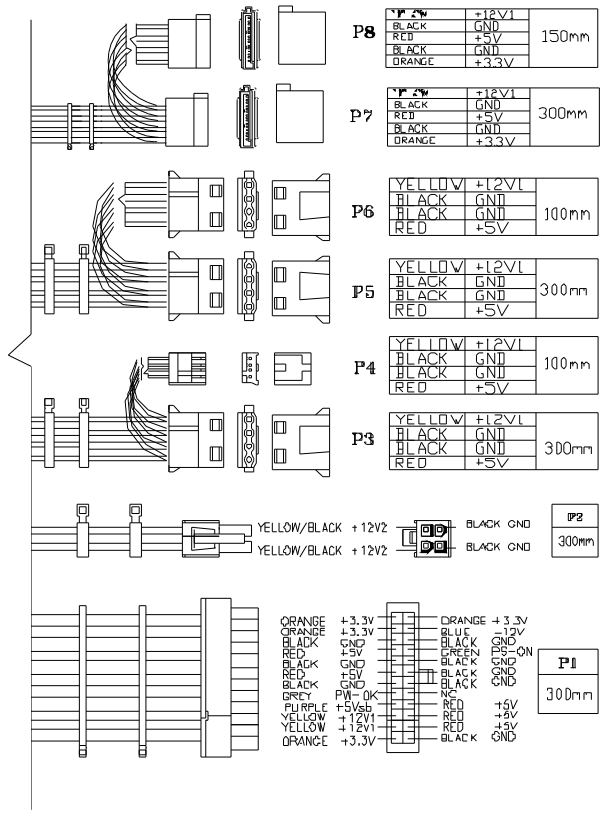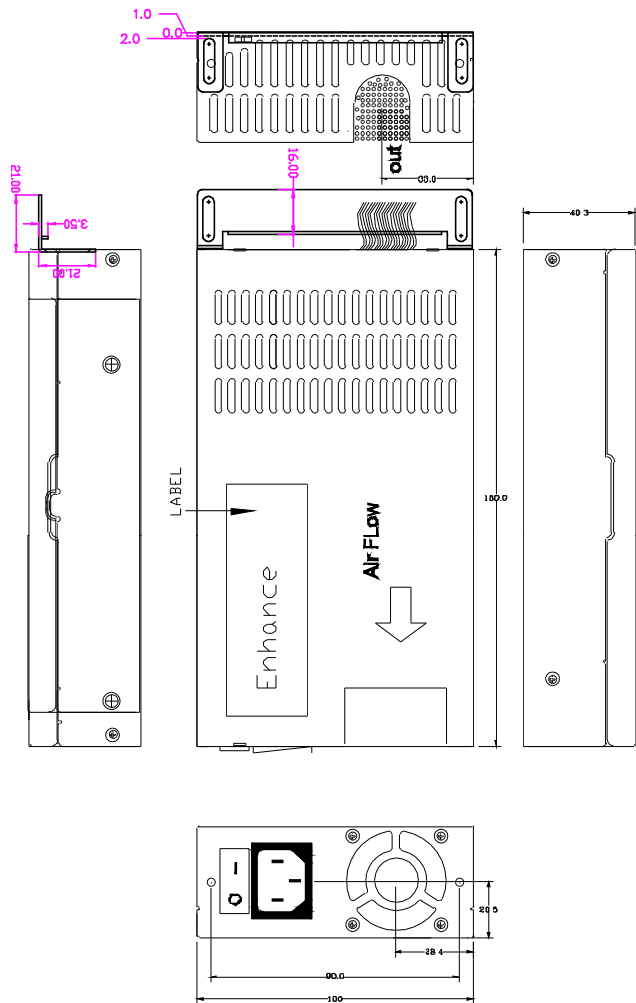

P1	Molex 39-01-2240 or equivalent
P2	Molex 39-01-2040 or equivalent
P3,P5,P6	Molex 8981-04P or equivalent
P4	AMP 171822-4 or equivalent
P7,P8	Molex 88751 or equivalent SATA

Notes

- Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheet are no longer controlled by Enhance Electronics, refer to <http://www.enhanceusa.com> for the most current product specifications.
- Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured.
- Mechanical drawings (model No. ENP-7030D) is for reference only. The cable wire configuration may vary from other custom designed models as picture showing. Please contact your sales representative for detail.
- Specifications are for reference only. All specifications are measured at an ambient temperature of 25°C, humidity 65%, 230Vac nominal input voltage and at rated output load unless otherwise specified.