


### product type designation

product description

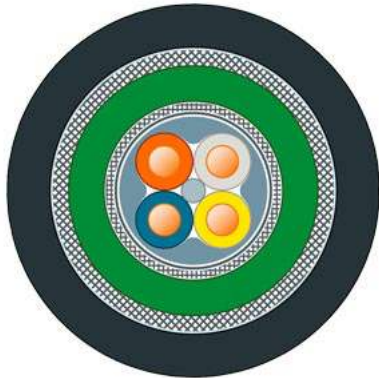

### IE TP Robust Ground Cable 2x2 (Type C)

Standard bus cable (4-core), for laying underground with metal rodent protection, sold by the meter, unassembled

IE robust ground cable 2x2; Cat5e; PROFINET Type C; underground cable; 4-core shielded, with rodent protection; sold by the meter; delivery unit max. 1000 m; minimum order quantity 20 m.

suitability for use

Standard cable with rigid cores for fast installation

cable designation

2YH(ST)CY(Z)2Y 2X2X0.64/1.45-100 BK

### electrical data

attenuation factor per length

- at 10 MHz / maximum
- at 100 MHz / maximum

0.065 dB/m  
0.22 dB/m

impedance

- at 1 MHz ... 100 MHz

100 Ω

relative symmetrical tolerance

- of the characteristic impedance at 1 MHz ... 100 MHz

15 %

near-end crosstalk per length

- at 1 MHz ... 100 MHz

0.5 dB/m

coupling loss / at 30 MHz ... 100 MHz / minimum

80 dB

transfer impedance per length / at 10 MHz

10 mΩ/m

loop resistance per length / maximum

115 mΩ/m

operating voltage

- RMS value

80 V

NVP value in percent

65 %

### mechanical data

number of electrical cores

4

design of the shield

Overlapped aluminum-clad foil, sheathed in a braided screen of tin-plated copper wires

type of electrical connection / FastConnect

Yes

core diameter

- of AWG22 insulated conductor

0.64 mm

outer diameter

- of inner conductor
- of the wire insulation
- of the inner sheath of the cable
- of cable sheath
- of cable sheath / note

0.64 mm  
1.5 mm  
3.9 mm  
9.4 mm

Cable diameter > 6.5 mm due to additional PE protective sheath and metal rodent protection. Cable can only be connected in the IE FC RJ45 Plug / IE FC M12 Plug PRO connector after stripping the protective sheath and the rodent protection.

symmetrical tolerance of the outer diameter / of cable sheath

0.4 mm

material

- of the wire insulation
- of the inner sheath of the cable
- of cable sheath

polyethylene (PE)  
PVC  
PE/PVC

color	
<ul style="list-style-type: none"> <li>• of the insulation of data wires</li> <li>• of cable sheath</li> </ul>	white/yellow/blue/orange Black
bending radius	
<ul style="list-style-type: none"> <li>• with single bend / minimum permissible</li> <li>• with multiple bends / minimum permissible</li> </ul>	94 mm 141 mm
tensile load / maximum	3000 N
weight per length	129 kg/km
<b>ambient conditions</b>	
ambient temperature	
<ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> <li>• during transport</li> <li>• during installation</li> <li>• note</li> </ul>	-40 ... +80 °C -40 ... +80 °C -40 ... +80 °C -30 ... +70 °C Electrical properties measured at 20 °C, tests according to EN50288-2-1
fire behavior	inflammable
class of burning behaviour / according to EN 13501-6	Fca
chemical resistance	
<ul style="list-style-type: none"> <li>• to mineral oil</li> <li>• to grease</li> <li>• to water</li> </ul>	conditional resistance Conditional resistance Resistant
radiological resistance / to UV radiation	resistant
<b>product features, product functions, product components / general</b>	
product feature	
<ul style="list-style-type: none"> <li>• halogen-free</li> <li>• silicon-free</li> </ul>	No Yes
wire length / for Industrial Ethernet	
<ul style="list-style-type: none"> <li>• with 100BaseTX</li> </ul>	100 m
<b>standards, specifications, approvals</b>	
UL/ETL listing / 300 V Rating	No
UL/ETL style / 600 V Rating	No
certificate of suitability	
<ul style="list-style-type: none"> <li>• EAC approval</li> <li>• CE marking</li> <li>• RoHS conformity</li> </ul>	Yes Yes Yes
standard for structured cabling	Cat5e
Marine classification association	
<ul style="list-style-type: none"> <li>• American Bureau of Shipping Europe Ltd. (ABS)</li> <li>• French marine classification society (BV)</li> <li>• Det Norske Veritas (DNV)</li> <li>• Germanische Lloyd (GL)</li> <li>• Lloyds Register of Shipping (LRS)</li> <li>• Nippon Kaiji Kyokai (NK)</li> <li>• Polski Rejestr Statkow (PRS)</li> </ul>	No No No No No No No
reference code	
<ul style="list-style-type: none"> <li>• according to IEC 81346-2</li> <li>• according to IEC 81346-2:2019</li> </ul>	WG WGB
<b>further information / internet links</b>	
internet link	
<ul style="list-style-type: none"> <li>• to web page: selection aid TIA Selection Tool</li> <li>• to website: Industrial communication</li> <li>• to website: Industry Mall</li> <li>• to website: Information and Download Center</li> <li>• to website: Selection guide for cables and connectors</li> <li>• to website: Image database</li> <li>• to website: CAX-Download-Manager</li> <li>• to website: Industry Online Support</li> </ul>	<a href="http://www.siemens.com/tia-selection-tool">http://www.siemens.com/tia-selection-tool</a> <a href="http://www.siemens.com/simatic-net">http://www.siemens.com/simatic-net</a> <a href="https://mall.industry.siemens.com">https://mall.industry.siemens.com</a> <a href="http://www.siemens.com/industry/infocenter">http://www.siemens.com/industry/infocenter</a> <a href="https://sie.ag/2QdlxcP">https://sie.ag/2QdlxcP</a> <a href="http://automation.siemens.com/bilddb">http://automation.siemens.com/bilddb</a> <a href="http://www.siemens.com/cax">http://www.siemens.com/cax</a> <a href="https://support.industry.siemens.com">https://support.industry.siemens.com</a>
last modified:	7/19/2023 