


P1:	M-Y251A
	M-251A
P2:	M-Y275A
	M-275A

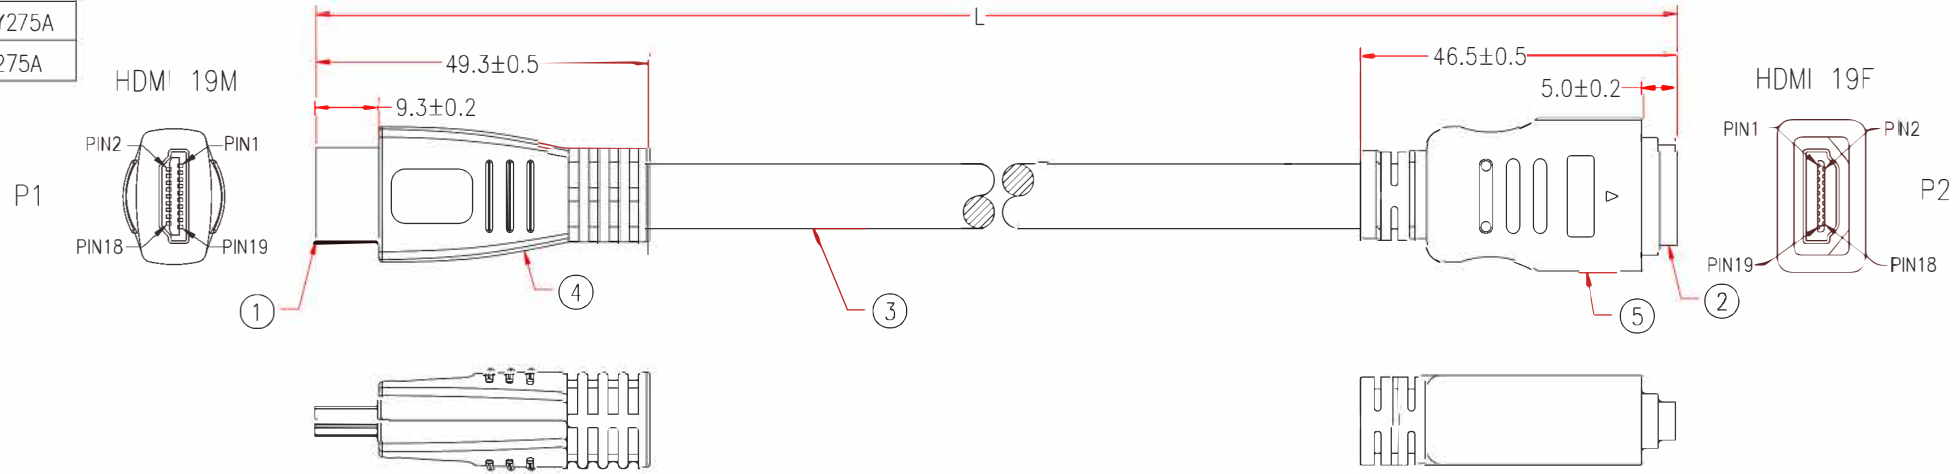

9G66-1

P1		P2	
1		1	RED
3		3	WHITE
2		2	SHIELD
4		4	RED
6		6	WHITE
5		5	SHIELD
7		7	RED
9		9	WHITE
8		8	SHIELD
10		10	RED
12		12	WHITE
11		11	SHIELD
14		14	RED
19		19	WHITE
17		17	SHIELD
13		13	WHITE
15		15	YELLOW
16		16	RED
18		18	ORANGE
SHIELD		SHIELD	SHIELD

MARKING:

⚠ E300060 兄 AWM 20276 24AWG 80°C 30V VW-1 CSA 204790 AWM I/II
 A 80°C 30V FT1 MSL High Speed HDMI™ cable with Ethernet

NOTE: All relevant materials are complied with RoHS directive

4&5	ALUMINUM FOIL 17*60mm	A6LA04-0309	2	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BLACK	H1BF01-0304K09		M304
⚠ 3	UL20276 [(24AWG(1/0.527CCS)*1Pair+AL+D+MY)*5Pcs+(24AWG(1/0.527CCS)*4C)]+AL+D+AMA BRAID(65%), OD 9.5mm, HDMI1.4, JACKET BLACK, DRAWING No. EAAB2405P2404C-1013	H5DC82-0304K09	L-20mm	M304
⚠ 2	HDMI 19 FEMALE, GOLD FLASH ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR, WITH PCB	A1KK59-1133	1	M1133
⚠ 1	HDMI 19 MALE, GOLD FLASH ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR, WITH PCB	A1KK48-1133	1	M1133
No.	DESCRIPTION		Q'TY	Supplier

APPROVED 市場部 2019.11.1
 CHECKED 屈飛霞



Cable Length Unless Other Spec. Tolerances:
 0 ~200mm ±10mm
 201~1000mm ±20mm
 1001 ~1500mm ±25mm
 1501~2100mm ±30mm
 2100mm↑ ±40mm

⚠ REV.3 2019.03.28	MODIFY CABLE DRAWING No	⚠ REV.4 2019.11.18	MODIFY CABLE	CHECKED	
⚠ REV.1 2012.04.25	MODIFY CONNECTOR	⚠ REV.2 2012.07.16	MODIFY PART NO.	CHECKED	

DRAWING	XIAO			
DATE	18/NOV/19	ITEM NO.	HDMI-MF-XXF	UNT:mm