

**Ratings**

Voltage: 600 V  
 Temperature: -40~105 °C  
 Flammability: FT2

**Conductor**

Conductor count: 4  
 Gauge: 18 AWG 0.82 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size: Ø 0.16 mm x 41  
 Resistance at 20 °C: 23.2 Ω /km max

**Insulator**

Material: mPPE  
 Color: red, black, white, yellow  
 Diameter: Ø 1.8 ±0.10 mm  
 Average thickness: 0.29 mm  
 Minimum thickness: 0.23 mm  
 Resistance at 20 °C: 100 MΩ /km min

**Shield**

Type: foil  
 Material: aluminum mylar  
 Coverage: 100%



**Outer jacket**

Material: mPPE, 85A  
 Color: black  
 Diameter: Ø 6.2 ±0.20 mm  
 Average thickness: 0.87 mm  
 Minimum thickness: 0.61 mm

**Wire marking:** E339579 UL AWM STYLE 21509 18 AWG 105°C 600V --- cUL AWM I A 105°C 600V FT2 TENSILITY

**Bend radius**

Minimum: 6 times diameter (37.2 mm)

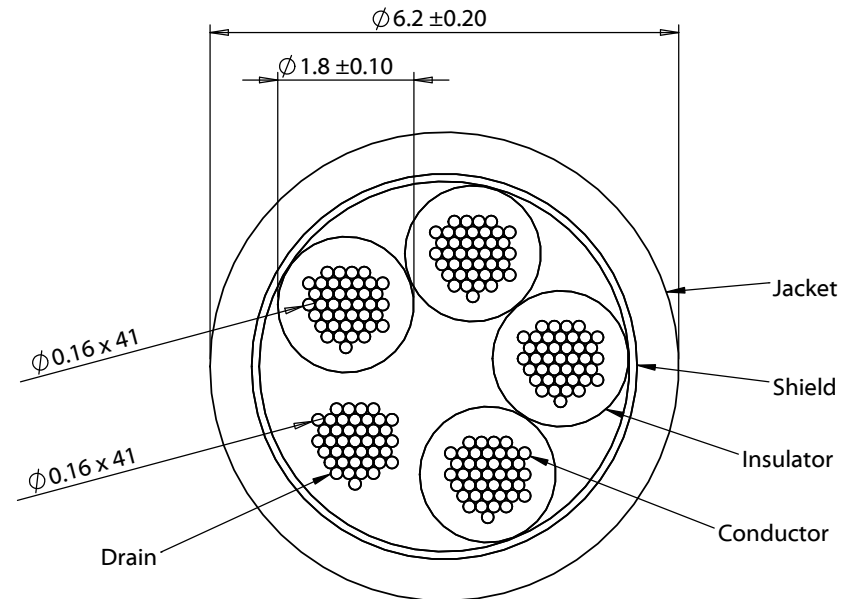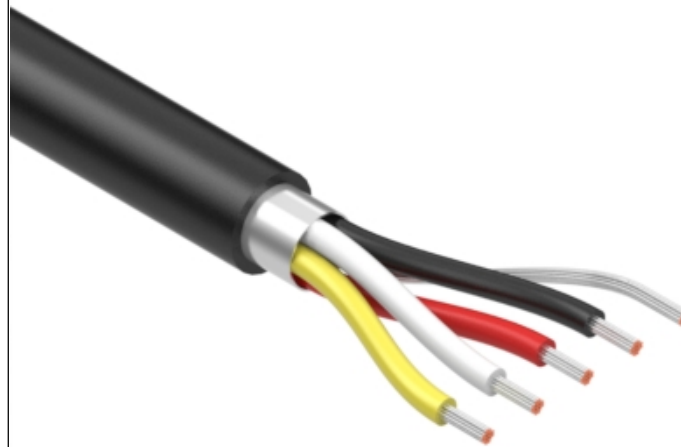

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	4/20/2020	Initial release	AW <small>Digitally signed by AW Date: 2020.04.22 08:29:57 -07'00'</small>		
			Verified:	Phthalate and halogen free	Size:
			JC <small>Digitally signed by JC Date: 2020.04.22 11:16:14 -07'00'</small>	Description:	Part number:
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Wire, 4C TS, 18 AWG, 21509, 600V, 105C, 6.2 mm, shielded, FT2, mPPE	A 30-01434
					Scale: 10:1
					Sheet 1 of 1

5

4

3

2

1