

Dip Switches "End to End Stackable" Through Hole and Surface Mount **GD Series**



FEATURES:

- Conventional gold wiping contact system
- Available in PC and surface mount configurations
- Traditional tape seal standard
- 95% Minimum solder coverage (90/10 tin lead)
- Withstands wave soldering temperature of 245°C for 3-5 seconds
- Heat deflection temperature of 260°C for surface mount compatibility
- End stackable (GDS version)
- Auto-insertable (GDS and GDB version)
- Vacuum pick and place compatible (GDS, GDB and GDH)
- Half pitch .050" terminal spacing (GDH version)
- Available in optional tape & reel packaging

ENVIRONMENTAL SPECIFICATIONS:

Operating Temperature -30°C to +85°C
 Storage Temperature -45°C to +100°C
 Solder Heat Resistance See page M6-7

MATERIAL SPECIFICATIONS:


Moving Contact Gold over nickel over copper alloy
 Fixed Contact Gold over copper alloy
 Base Material PPS UL94V-0
 Cover Material PPS UL94V-0
 Actuator Material High temperature polyester/polyamide
 Terminal Tin lead plated over nickel over copper alloy

TYPICAL PERFORMANCE CHARACTERISTICS:

Contact Rating 0.4 VA 25ma @ 24 VDC
 Initial Contact Resistance 100 Milliohms max.
 Insulation Resistance 100 Megohms min. @ 250 VDC
 Dielectric Strength 300 VAC
 Life Expectancy 1,000 Cycles
 Operating Force 60-600 Grams

End to End Stackable!

GDS Low Profile Slide Actuator

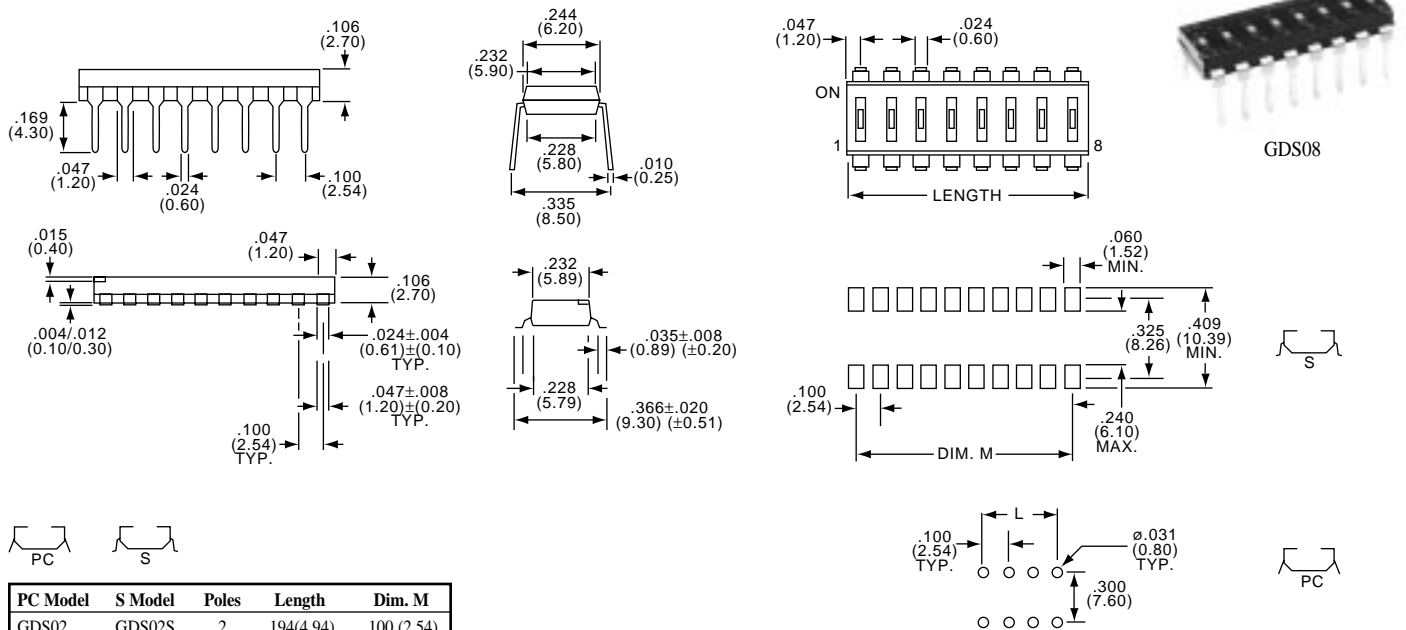

See pages M2-M4 for application specific indexing.

Need more technical information?

Consult your Thomas & Betts sales office listed on the back cover

GD Series *Dip Switches "Piano and Rocker" Actuator*


Through hole and Surface Mount

A

GDP
Classic Profile Piano Actuator



GDP08

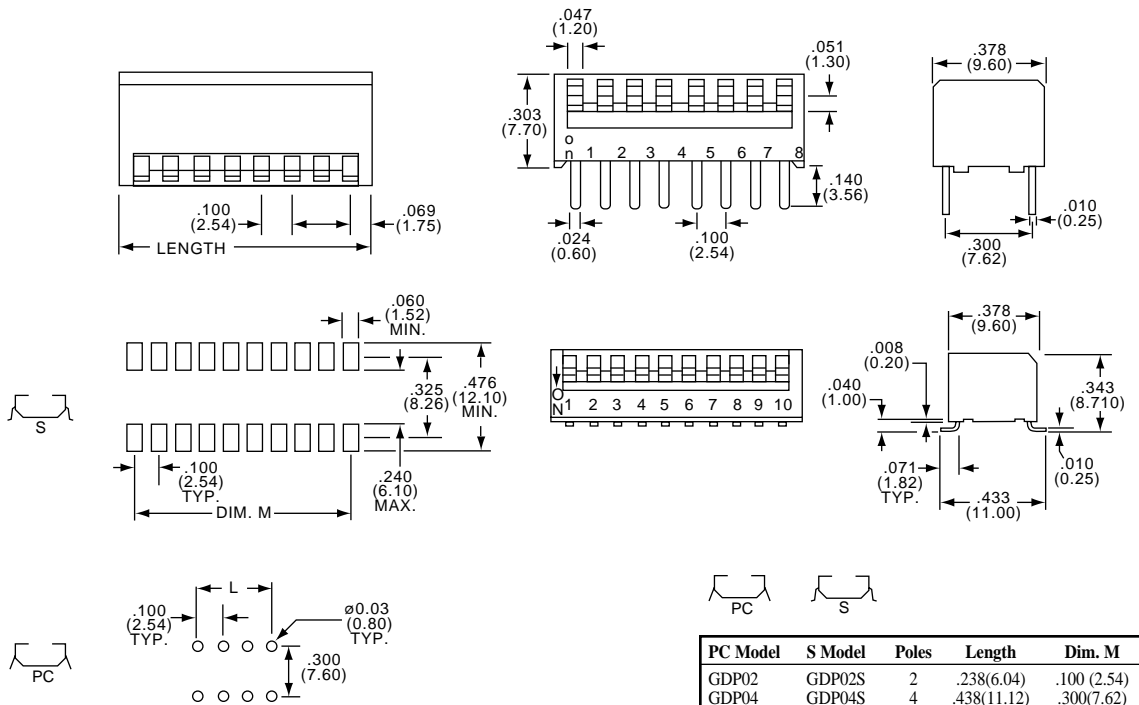


PC Model	S Model	Poles	Length	Dim. M
GDP02	GDP02S	2	.238(6.04)	.100 (2.54)
GDP04	GDP04S	4	.438(11.12)	.300(7.62)
GDP06	GDP06S	6	.638(16.20)	.500(12.7)
GDP08	GDP08S	8	.838(22.28)	.700(17.78)
GDP10	GDP10S	10	1.038(26.36)	.900(22.86)

GDB
Flush Rocker Actuator



GDB08

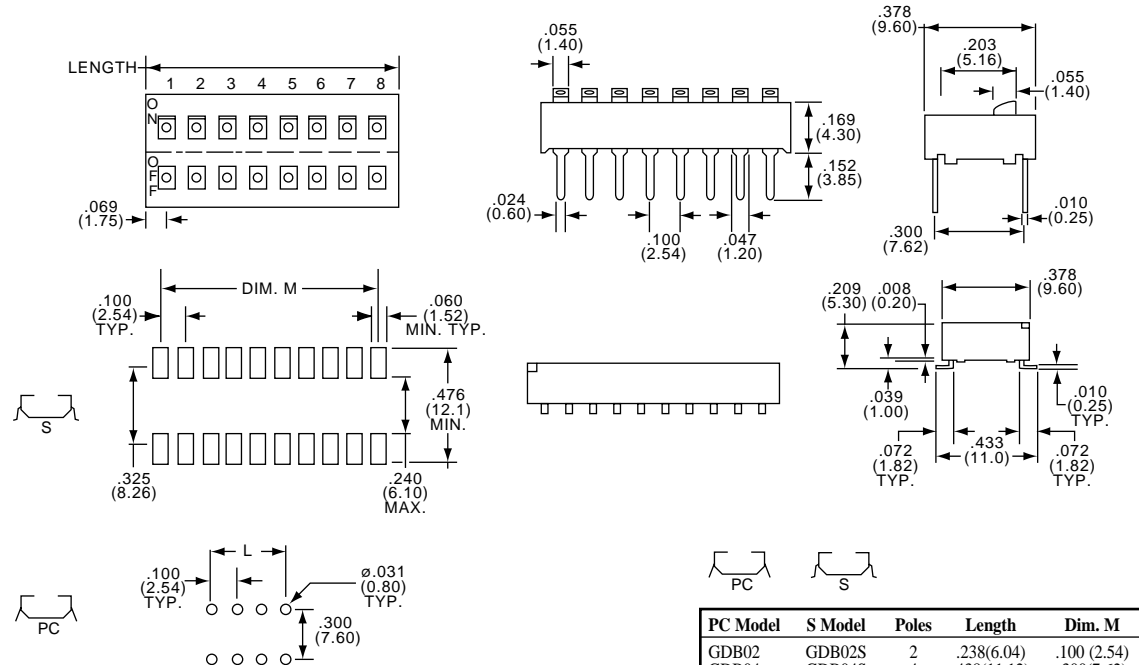

PC Model	S Model	Poles	Length	Dim. M
GDB02	GDB02S	2	.238(6.04)	.100 (2.54)
GDB04	GDB04S	4	.438(11.12)	.300(7.62)
GDB06	GDB06S	6	.638(16.20)	.500(12.7)
GDB08	GDB08S	8	.838(21.28)	.700(17.78)
GDB10	GDB10S	10	1.038(26.36)	.900(22.86)

Thomas & Betts

Quality & Innovation From **AUGAT** Name Brand Products


A4

Thomas & Betts
8155 T&B Blvd.
Memphis, TN 38125
(901) 252-5000 FAX (901) 252-1380

Dip Switches "Recessed Rocker" Surface Mount "Half Pitch" .050" Low Profile

GD Series


GDR
Classic Profile
Recessed Rocker Actuator

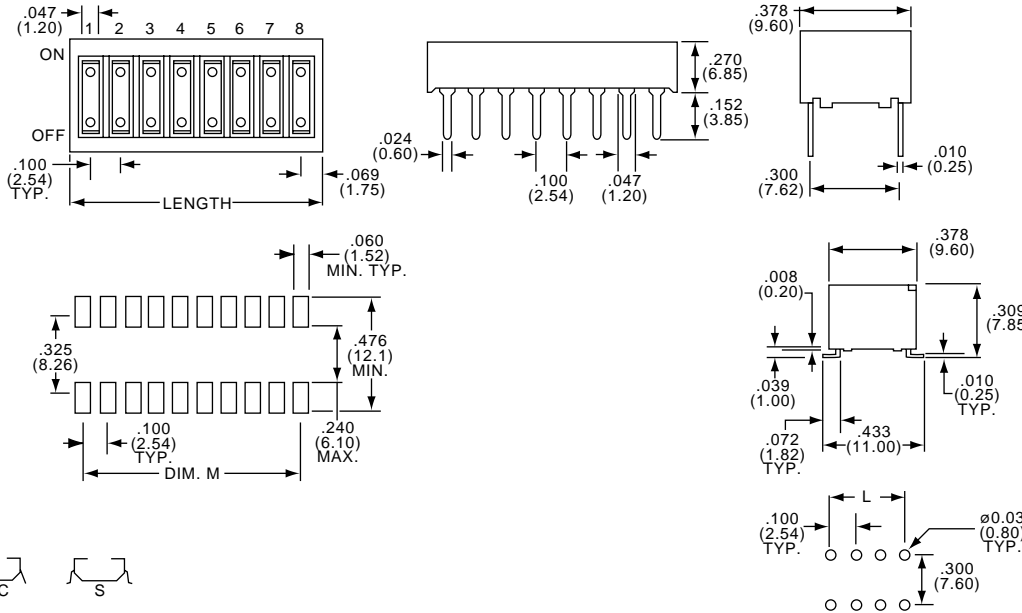

GDR08



GDH
Half Pitch .050" Terminal Spacing

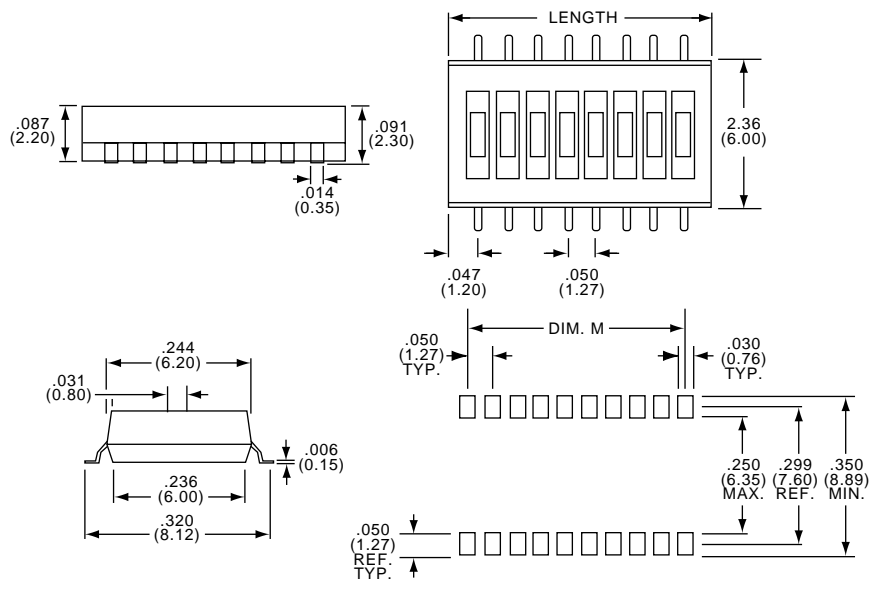

GDH08S



Need more technical information?
Consult your Thomas & Betts
sales office listed on the back cover