

In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


△	△	△	△	△	△	△	△	△	△
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

APPLICATION STANDARD		OPERATING TEMPERATURE RANGE	-55 °C TO 85 °C	STORAGE TEMPERATURE RANGE	-10 °C TO 60 °C
RATING VOLTAGE		AC 50 V	OPERATING HUMIDITY RANGE	RELATIVE HUMIDITY: 95 % MAX (NO DEW CONDENSATION IS PERMITTED)	
CURRENT		0.3 A			

SPECIFICATIONS

ITEM	TEST METHOD	REQUIREMENT	QT	AT
CONSTRUCTION				
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.	ACCORDING TO DRAWING	X	X
MARKING	CONFIRMED VISUALLY.		X	X
ELECTRICAL CHARACTERISTICS				
CONTACT RESISTANCE	100 mA (DC OR 1000 Hz).	60 mΩ MAX.	X	X
INSULATION RESISTANCE	100 V DC.	100 MΩ MIN.	X	-
VOLTAGE PROOF	150 V AC FOR 1 min.	NO FLASHOVER OR BREAKDOWN.	X	X
MECHANICAL CHARACTERISTICS				
INSERTION AND WITHDRAWAL FORCES	MEASURED BY APPLICABLE CONNECTOR.	INSERTION FORCE: 40.8 N MAX. WITHDRAWAL FORCE: 1.7 N MIN.	X	-
MECHANICAL OPERATION	50 TIMES INSERTION AND EXTRactions	1) CONTACT RESISTANCE: 70 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.	X	-
VIBRATION	FREQUENCY: 10 TO 55 Hz, SINGLE AMPLITUDE: 0.75 mm, — m/s ² AT 10 CYCLES FOR 3 DIRECTIONS.	1) NO ELECTRICAL DISCONTINUITY OF 1 μs MIN. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.	X	-
SHOCK	490 m/s ² DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.		X	-

ENVIRONMENTAL CHARACTERISTICS				
DAMP HEAT (STEADY STATE)	EXPOSED AT 40±2 °C, 90~95 %, 96 h.	1) CONTACT RESISTANCE: 70 mΩ MAX. 2) INSULATION RESISTANCE: 100 MΩ MIN. 3) NO DAMAGE, CRACK AND LOOSENESS OF PART.	X	-
RAPID CHANGE OF TEMPERATURE	TEMPERATURE: 55→15~35→ 85→15~35°C TIME: 30→ 2~ 3→ 30→ 2~ 3 min. UNDER 5 CYCLES.		X	-
DRY HEAT	EXPOSED AT 85 °C, 96 h.	1) CONTACT RESISTANCE: 70 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.	X	-
COLD	EXPOSED AT -55 °C, 96 h.		X	-
CORROSION SALT MIST	EXPOSED IN 5% SALT WATER SPRAY FOR 48 h.	NO HEAVY CORROSION	X	-
SULPHUR DIOXIDE	EXPOSED IN 10 PPM FOR 96 h. (TEST STANDARD: JIS C 0090)	1) CONTACT RESISTANCE: 70 mΩ MAX. 2) NO HEAVY CORROSION.	X	-
RESISTANCE TO SOLDERING HEAT	REFLOW RECOMMENDED TEMPERATURE PROFILE	NO MELTING OF RESIN WHICH AFFECTS THE PERFORMANCE OF COMPONENT.	X	-

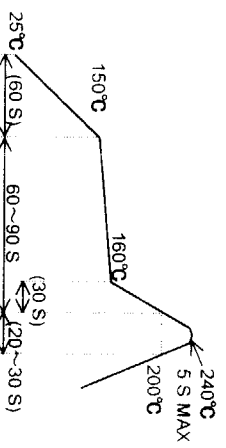

SOLDERABILITY	TO BE TESTED UNDER THE ABOVE CONDITIONS SOLDERED AT SOLDER TEMPERATURE, 235 °C FOR IMMERSION DURATION, 2 s.	NO PINHOLE OR DEWETTING ON SOLDERED SURFACE.	X	-
---------------	--	--	---	---

REMARKS	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
UNLESS OTHERWISE SPECIFIED, REFER TO JIS C 5402.	<i>Shibataken</i>	<i>Shibataken</i>	<i>M. Shioda</i>	<i>S. Yamaguchi</i>	
NOTE QT: QUALIFICATION TEST AT ASSURANCE TEST X: APPLICABLE TEST	99.10.25	99.10.25	99.10.26	99.10.26	

HRS HIROSE ELECTRIC CO., LTD.		SPECIFICATION SHEET		PART NO.	
CODE NO. (OLD)	DRAWING NO.	ELC4 - 152120 - 01	CODE NO.	CL 573 - 0152 - 0 - 21	FX11LB-68 S - SV (21)
CL					

TO
PCK