


REVISIONS				
REV	ECR	DESCRIPTION	DRAWN	DATE
1		ENGINEERING RELEASE	P. BURDGE	09/10/2020

-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO CENTER OF CONNECTORS. EXAMPLES SHOWN BELOW:



LTI P/N: CB1.13-2IPX4L-7IN-60 (7 INCHES)
 CB1.13-2IPX4L-10.5IN-60 (10.5 INCHES)

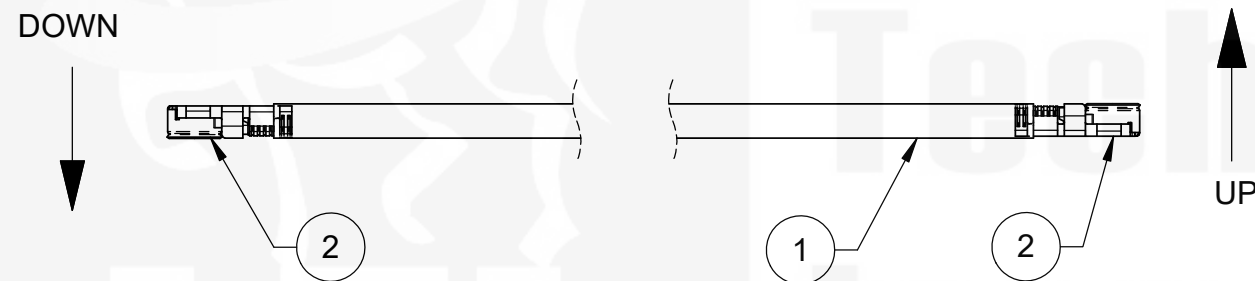

LENGTH TOLERANCE FOR CABLE ASSEMBLIES	
Inches	Millimeters
0 - 2IN +/- 0.040	0 - 51 +/- 1
2IN - 6IN +/- 0.080	51 - 153 +/- 2
6IN - 12IN +/- 0.140	153 - 305 +/- 3.5
12IN - 48IN +/- 0.250	305 - 1219 +/- 6.4
48IN - 144IN (12FT) +/- 0.500	1219 - 3658 +/- 13
144IN (12FT) - ABOVE +/- 1.0	3658 - ABOVE +/- 25
UNLESS OTHERWISE SPECIFIED ON DRAWING	

ITEM	PART NUMBER	DESCRIPTION	QTY
1	1.13 MICRO COAX	CABLE, 1.13 (LOW LOSS) MICRO COAX, BLACK	AR
2	IPX4LLF11GPB-113	IPX4L (MHF4L), RHT ANGLE, JACK, CABLE CRIMP	2

MHF IS A REGISTERED TRADEMARK OF I-PEX CO., LTD. CORPORATION

DO NOT SCALE DRAWING		 Lighthouse Technologies San Diego, CA WWW.RFCONNECTOR.COM
TOLERANCES UNLESS OTHERWISE SPECIFIED		
DIMENSIONS ARE IN MILLIMETERS		TITLE: CABLE ASSY, IPX4L (MHF4L), R/A JACK TO IPX4L (MHF4L), R/A JACK, 1.13 MICRO COAX, GRAY, OPPOSITE ORIENTATION
X = ±0.5 X.X = ±0.25 X.XX = ±0.13 ANGLE = ±30'		
 THIRD ANGLE PROJECTION		SIZE: B PART/DWG. NO: CB1.13-2IPX4L-XXIN-60 REV: 1
CUSTOMER APPROVAL		
SIGN / DATE:		SCALE: 4:1
ENG APPR.		FILE NAME
CHECKED		SHEET 1 OF 1
DRAWN: P. BURDGE	09/10/2020	
NAME	DATE	

PROPRIETARY AND CONFIDENTIAL
 UNLESS OTHERWISE SPECIFIED: THIS DOCUMENT CONTAINS LIGHTHORSE TECHNOLOGIES INFORMATION. REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHTHORSE TECHNOLOGIES. LIGHTHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPYRIGHTS AND TRADE SECRETS. COPY RIGHTS OF LIGHTHORSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.

