
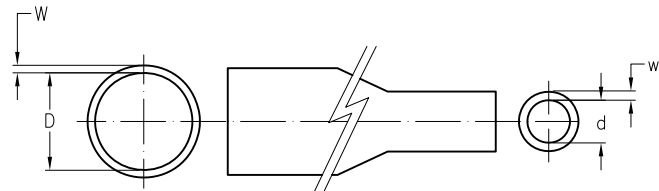


APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/28/21	
A		ADDED SPEC.	5/24/21	LH/RC
B		ADDED PAGE 2	7/9/21	LH/RC
C		ADDED LENGTH 18MM	6/15/23	LH/NL
D		UPDATE SPEC.	8/8/23	LH/RC

Part Number	Size (mm)	As supplied (mm)		After recovered (mm)		Length
		I.D (D)	W.T (W)	I.D (max)	W.T (min)	
				(d)	(w)	
HST-00-BK-X	0.8	1.0±0.2	0.15±0.05	0.6	0.25	See Order Information
HST-01-BK-X	1.0	1.5±0.3	0.20±0.05	0.7	0.33	
HST-02-BK-X	1.5	1.5±0.3	0.20±0.05	0.8	0.34	
HST-03-BK-X	2.0	2.5±0.3	0.20±0.05	1.1	0.34	
HST-04-BK-X	2.5	3.0±0.3	0.25±0.05	1.25	0.42	
HST-05-BK-X	3.0	3.5±0.3	0.25±0.05	1.5	0.42	
HST-06-BK-X	3.5	4.0±0.3	0.25±0.05	1.75	0.42	
HST-07-BK-X	4.0	4.5±0.3	0.25±0.05	2.0	0.42	
HST-08-BK-X	4.5	5.0±0.3	0.25±0.05	2.25	0.42	
HST-09-BK-X	5.0	5.5±0.3	0.28±0.05	2.5	0.52	
HST-10-BK-X	6.0	6.5±0.3	0.28±0.05	3.0	0.52	
HST-11-BK-X	7.0	7.6±0.3	0.30±0.07	3.5	0.56	
HST-12-BK-X	8.0	8.6±0.3	0.30±0.07	4.0	0.56	
HST-13-BK-X	9.0	9.6±0.3	0.30±0.07	4.5	0.56	
HST-14-BK-X	10.0	10.7±0.4	0.30±0.07	5.0	0.56	
HST-15-BK-X	11.0	11.7±0.4	0.30±0.07	5.5	0.56	
HST-16-BK-X	12.0	12.7±0.4	0.30±0.07	6.0	0.56	
HST-17-BK-X	13.0	13.7±0.4	0.35±0.08	6.5	0.69	
HST-18-BK-X	14.0	14.7±0.4	0.35±0.08	7.0	0.69	
HST-19-BK-X	15.0	15.7±0.5	0.35±0.08	7.5	0.69	
HST-20-BK-X	16.0	16.7±0.5	0.35±0.08	8.0	0.69	
HST-21-BK-X	17.0	17.7±0.5	0.35±0.08	8.5	0.69	
HST-22-BK-X	18.0	19.0±0.5	0.40±0.10	9.0	0.77	
HST-23-BK-X	20.0	21.0±0.5	0.40±0.10	10.0	0.77	
HST-24-BK-X	22.0	23.0±0.5	0.40±0.10	11.0	0.77	
HST-25-BK-X	25.0	26.0±1.0	0.45±0.10	12.5	0.87	
HST-26-BK-X	28.0	29.0±1.0	0.45±0.10	14.0	0.87	
HST-27-BK-X	30.0	31.5±1.0	0.45±0.10	15.0	0.87	
HST-28-BK-X	35.0	36.5±1.0	0.50±0.10	17.5	0.97	
HST-29-BK-X	40.0	42.0±1.5	0.50±0.10	20.0	0.97	
HST-30-BK-X	45.0	47.0±1.5	0.50±0.10	22.5	0.97	
HST-31-BK-X	50.0	53.0±2.0	0.55±0.10	25.0	0.97	
HST-32-BK-X	60.0	63.0±3.0	0.60±0.15	30.0	1.17	
HST-33-BK-X	70.0	71.0±3.0	0.60±0.15	35.0	1.17	
HST-34-BK-X	80.0	81.0±3.0	0.65±0.15	40.0	1.20	
HST-35-BK-X	90.0	91.0±3.0	0.75±0.15	45.0	1.30	
HST-36-BK-X	100	101.0±3.0	0.75±0.15	50.0	1.30	
HST-37-BK-X	120	121.0±4.0	0.80±0.20	60.0	1.40	
HST-38-BK-X	150	151.0±4.0	0.80±0.20	75.0	1.50	
HST-39-BK-X	180	181.0±4.0	0.80±0.20	90.0	1.60	

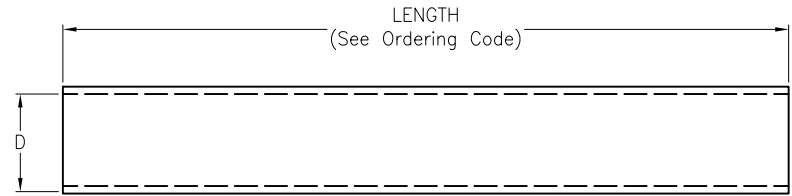

BEFORE SHRINKING AFTER SHRINKING

HST-00-BK-X (0.8 SIZE only Black)

HST-XX-XX-X

TYPE SEE CHART

Color	Length
BK=Black	1= 1FT(12"inch)
WT=White	2= 2FT(24"inch)
RD=Red	3= 3FT(36"inch)
BU=Blue	4= 4FT(48"inch)
YW=Yellow	A= 18mm
GN=Green	
BN=Brown	
OR=Orange	
VT=Violet	
GY=Gray	
CL=Clear	

SPECIFICATIONS:  
 Material: Polyolefin  
 Electrical:  
 Shrinkage: 2:1  
 UL Style: UL224, 105°C VW-1 600V  
 Temperature Rating:  
 Operating temperature: -55°C to +125°C  
 Environmental:  
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED					909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710
DRAWN	LH	1/28/21	TITLE HEAT SHRINK TUBING, SINGLE WALL, FLAME RETARDANT POLYOLEFIN		
CHECKED	RC	1/28/21			
APPROVED					
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH			SIZE X	PART NO. HST-XX-XX-X	REV. D
REF:	-	SCALE: NTS	SHEET 1 OF 2		

6

5

4

3

2


1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
RELEASED				

CARTON

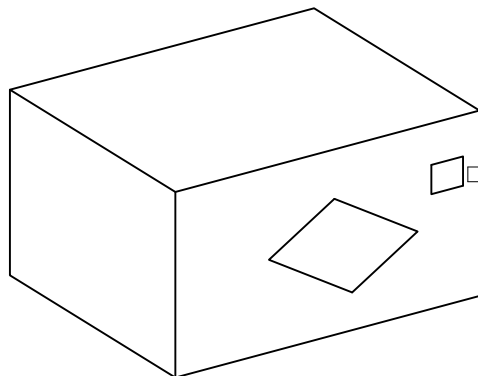

PO:XXXXXXXX (SOXXXXXXXX)  ADAM TECH P/N: HST-XX-XX-4  QTY: XXXX PCS  LOT DTAE: XXXX  POLYOLEFIN HEAT SHRINK TUBING	<b>ADAM TECH</b>  <b>RoHS</b>
--	---

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED



909 Rahway Avenue,  
Union, NJ 07083  
Phone: 908-687-5000  
Fax: 908-687-5710

DRAWN	LH	1/28/21
CHECKED	RC	1/28/21
APPROVED		

TITLE	HEAT SHRINK TUBING, SINGLE WALL, FLAME RETARDANT POLYOLEFIN	
SIZE	PART NO.	REV.
X	HST-XX-XX-X	D

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

REF: -	SCALE: NTS	SHEET 2 OF 2
--------	------------	--------------

6

5

4

3

2

1