
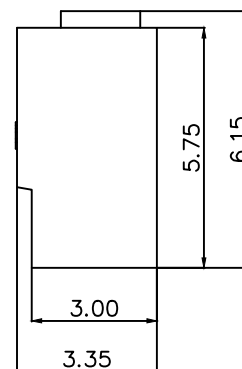



NOTE:

- 1 .ELECTRICAL CHARACTERISTICS
 - 1-1 RATING CURRENT: 2A AC/DC
 - 1-2 RATING VOLTAGE: 250V AC/DC
 - 1-3 INSULATION RESISTANCE: 1000M OHMS MIN
 - 1-4 WITHSTANDING VOLTAGE: 800V AC/1MINUTE
 - 1-5 OPERATING TEMPERATURE: -40°C~+105°C
- 2. MATERIAL:
 - PA66, UL 94V-0, NATURAL COLOR
- 3. USED WITH AFCI 10156613
- 4. PRODUCT SPEC: GS-12-1594
- 5. ORDERING CODE: 10156612-XX 0 X LF

NUMBER OF PINS ——— PACKAGE
 02~16: 02~16PINS 0: BAG

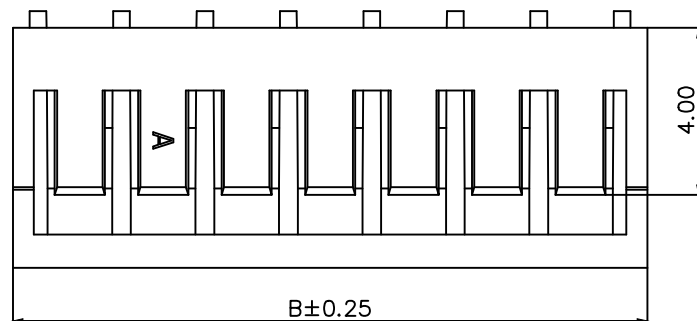

POS	DIMENSIONS(MM)		POS	DIMENSIONS(MM)	
	A	B		A	B
2	2.00	5.20	10	18.00	21.20
3	4.00	7.20	11	20.00	23.20
4	6.00	9.20	12	22.00	25.20
5	8.00	11.20	13	24.00	27.20
6	10.00	13.20	14	26.00	29.20
7	12.00	15.20	15	28.00	31.20
8	14.00	17.20	16	30.00	33.20
9	16.00	19.20			

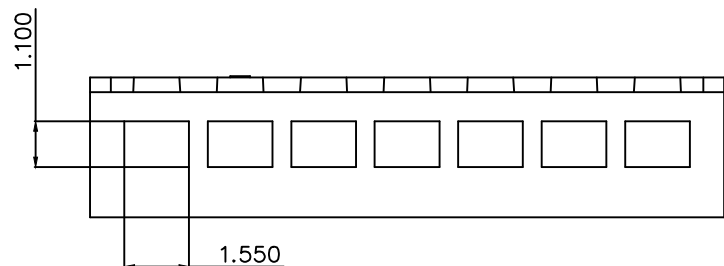

Amphenol FCI

© 2016 AFCI

mat'l. code		surface	tolerance	projection	product family
		ISO 1302	ISO 406 ISO 1101		MINITEK
ltr	ecn no	dr	date	title	
A	New release	Jason	2020-2-19	2.0PITCH BOARD-IN, R/A , HOUSING	
		angles	linear	mm	dwg no
		0°±x'	.X±.3 .XX±.20 .XXX±.10	scale 2:1	sheet 1 of 1 size
		dr	Jason Wang	2020-1-19	10156612
		engr	Jason Wang	2020-2-19	A3
		chr	-	-	type
		appd	Tim Yao	2020-2-19	Product Customer Drawing
sheet	revision	A			
index	sheet	1			