


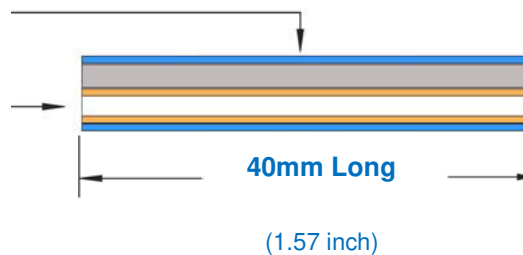


PS-6A-X40M

Fiber optic fusion splice protector sleeve

Product Dimensions

Sleeve Diameter After Shrinkage	1.9 mm (0.075 inch)
Supplied Internal Diameter	1.2 mm (0.047 inch)
Single fiber size	250 to 900 µm
Reinforcing Member	Stainless Steel Rod 0.5mm (0.197 inch)
Color	Clear
Package Quantity	Bag 50



-  Heat Shrink Outer Polyolefin Tube
-  Hot-Melt Adhesive Inner Tube
-  Stainless Steel Reinforcing Rod

Product Features

- Provides mechanical and environmental protection to fiber splices after fusion splicing
- Bellcore (Telcordia) GR-1380-CORE Certification
- UL 224 approved YDPU2.E467437 high quality materials
- Pre-shrunk heat bonded design for faster installation
- Single fibre aperture for easier fiber insertion
- Stainless steel reinforcing pin
- 25+ years of specialist manufacturing experience with proven long-term reliability
- Compatible with most optic fibers, splice trays and splice ovens
- RoHS & REACH Compliant and Conflict Free



Member #0240

